

2018 MTB DESIGN PHILOSOPHY

RACE-READY / PERFORMANCE

TRAIL

Aggressive trail full suspension geometry with boost 148 rear end.

Lengthened top tube with short 45mm extension stem.

140mm travel front suspension and 130mm travel rear suspension.

Tough boost 27.5" wheels built with quality hubs and 40mm width rim.

Aggressive 27.5" x 2.8 plus size tyres.

Slacker head tube angle for aggressive trail riding.

Lengthened top tube with short 45mm extension stem.

Longer 120mm travel suspension.

Tough 27.5" wheels built with quality hubs and 32mm width rim.

Aggressive 27.5" x 2.35 tyres.

XC

XC ready 100mm travel front suspension.

Lightweight 29" wheels built with quality hubs and 21mm width rim.

Light weight and durable 6061 alloy frame.

Faster rolling tyres 29" XC tyre.

Aggressive race geometry.

FAT BIKE

Custom lightweight carbon or 6061 alloy fat bike specific frames.

Lightweight and durable forks.

26" oversized fat bike tyres for max traction on low friction surfaces.

Sram shifting components.

Hydraulic disc brakes front and rear with larger diameter rotors for maximum stopping power.

27.5" PLUS



TRAIL D 30



TRAIL D 20



TRAIL D 10

27.5"



TRAIL 30



TRAIL 20



TRAIL 10

29"



COMP 30



COMP 20



COMP 10

26"



STOUT 40



STOUT 20



STOUT 10

RECREATIONAL RIDING

RECREATIONAL MTB

Solid alloy frame.

Quality built wheels with alloy rims.

Quality brakes & shifting.

Plush travel suspension front fork, for extra riding comfort.

Choose between 29", 27.5" or 26" wheel size.

29"



XPERT 20



XPERT 10

27.5"



ASPIRE 30



ASPIRE 20



ASPIRE 20 WS



ASPIRE 10



ASPIRE 10 WS

26"



SUMMIT 10



MONACO WS



ALPINA WS



ACTIVA WS



New 27.5" plus carbon dual suspension, 130mm travel, Boost 148mm

Manitou Mattoc Comp 140mm travel fork with hydraulic lockout and Boost 110mm

Veetire T-Fatty 27.5" x 2.8" MTB plus tyres, with Sunringle Duroc

SRAM GX Eagle 1 x 12 speed shifting, with SRAM 10-50T cassette and 32T alloy narrow wide crank

Oversized 31.8mm lightweight alloy A-head stem

Oversized 31.8mm handlebar

SRAM Guide-R hydraulic disc brakes with 200mm front rotor and 180mm rear rotor $\,$

KS LEV eTen 125mm travel dropper post

Factor Trail specific MTB saddle

Factor double lock-on MTB grip

CODES	М	L
Matte Nude Carbon / Gloss Charcoal / Gloss Blue	18117	18118

GEOMETRY	М	L
STACK	613	623
REACH	440	456
STAND OVER HEIGHT	n/a	n/a
EFFECTIVE TOP TUBE	616	635
SEAT TUBE (CENTRE TO TOP)	430	489
SEAT ANGLE	74.0°	74.0°
HEAD TUBE LENGTH	105	115
HEAD ANGLE	68.5°	68.5°
WHEEL BASE	1170	1189
CHAIN STAY LENGTH	443	443
BB DROP	24	24
FORK RAKE	51	51
AXLE TO CROWN	551	551
REAR DROPOUT SPACING	148	148
· · · · · · · · · · · · · · · · · · ·		

FRAME	27.5" Plus carbon dual suspension frame, UD carbon, 130mm (5") travel. 1-1/8 - 1-1/2" head tube, 12x148mm Boost Manitou Mattoc Comp, tapered alloy steerer, 140mm travel with O15 Thru Axle	HEAD STEM CRANKSET	Factor 3D forged stem, 31.8mm 4 bolt stem, Ext: S/M/L=45mm SRAM GX-1201 Press fit 1x 11 speed crank 28T L: S=170mm, M/L=175mm	CHAIN BRAKES WHEELS	SRAM EAGLE 12 speed SRAM Guide R hydraulic disc brakes, 200mm front 180mm rear rotors 27.5" Sun Ringle Duroc 40 40mm wide
REAR SHOCK	Rockshox Monarch RT	BOTTOM BRACKET PEDALS	BSA threaded Nil	TYRES	alloy 32h welded alloy rims. 12 x 142mm rear hub and 15mm Thru Axle front hub Veetire T-Fatty. 27.5 x 2.8, wire bead
HEADSET HANDLEBAR GRIP	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings Factor alloy riser bar 31.8mm W: 740mm, sweep: 5° Lock-on grips, Kraton rubber	F. DERAILLEUR R. DERAILLEUR SHIFT LEVERS CASSETTE	Nil SRAM GX EAGLE 12 speed SRAM GX EAGLE 12 speed trigger shifter SRAM 12 speed cassette 10 - 50T	SADDLE SEATPOST/ CLAMP EXTRAS	Factor MTB sport saddle KS ETEN INTEGRA 125mm travel dropper post 31.6mm N/A



KEY FEATURES New 27.5" plus alloy dual suspension, 130mm travel, Boost 148mm Manitou Mattoc Comp 140mm travel fork with hydraulic lockout and Boost 110mm Veetire T-Fatty 27.5" x 2.8" MTB plus tyres, with Sunringle Duroc 40mm rims SRAM GX Eagle 1 x 12 speed shifting, with SRAM 10-50T cassette and 32T alloy narrow wide crank Oversized 31.8mm lightweight alloy A-head stem Oversized 31.8mm handlebar SRAM Guide-R hydraulic disc brakes with 200mm front rotor and 180mm rear rotor KS LEV eTen 125mm travel dropper post Factor Trail specific MTB saddle Factor double lock-on MTB grip

M	L
18120	18121

GEOMETRY	М	L
STACK	601	620
REACH	427	451
STAND OVER HEIGHT	n/a	n/a
EFFECTIVE TOP TUBE	605	640
SEAT TUBE (CENTRE TO TOP)	432	483
SEAT ANGLE	73.5°	73.0°
HEAD TUBE LENGTH	120	140
HEAD ANGLE	66.3°	66.3°
WHEEL BASE	1204	1242
CHAIN STAY LENGTH	450	450
BB DROP	20	20
FORK RAKE	42	42
AXLE TO CROWN	535	535
REAR DROPOUT SPACING	142	142

FRAME	27.5" Plus dual suspension frame, 6061	GRIP	Lock-on grips, Kraton rubber	CASSETTE	SRAM 12 speed cassette 10 - 50T
	alloy with 130mm (5") travel. 1-1/8 - 1-1/2" head tube, BB91 press fit bottom bracket,	HEAD STEM	Factor 3D forged stem, 31.8mm 4 bolt	CHAIN	SRAM EAGLE 12 speed
	12x142mm rear axle, internal cable routing		stem, Ext: S/M/L=45mm	BRAKES	SRAM Guide R hydraulic disc brakes,
FORK	Manitou Mattoc Comp. Tapered alloy	CRANKSET	SRAM GX Eagle 12 speed 28T, L: S=170mm, M/L=175mm		200mm front 180mm rear rotors
REAR SHOCK	steerer, 140mm travel with Q15 Thru Axle Rockshox Monarch RT	BOTTOM BRACKET	BB91 press fit cartridge bearings	WHEELS	27.5" Sun Ringle Duroc 40 40mm wide alloy 32h welded alloy rims. 12 x 142mm rear hub and 15mm Thru Axle front hub
		PEDALS	Nil	TYRES	Veetire T-Fatty. 27.5 x 2.8, wire bead
HEADSET	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings	F. DERAILLEUR	Nil	SADDLE	Factor MTB sport saddle
HANDLEBAR	Factor alloy riser bar 31.8mm W: 740mm,	R. DERAILLEUR	SRAM GX EAGLE 12 speed	SEATPOST/	KS ETEN INTEGRA 125mm travel
	sweep: 5°	SHIFT LEVERS	SRAM GX EAGLE 12 speed trigger shifter	CLAMP	dropper post 31.6mm
				EXTRAS	N/A

TRAIL D 10



KEY FEATURES

New 27.5" plus alloy dual suspension, 130mm travel, Boost 148mm

Manitou Machete Comp 140mm travel fork with hydraulic lockout and Boost 110mm

Veetire T-Fatty 27.5" x 2.8" MTB plus tyres, with Sunringle Duroc

SRAM NX 1 x 11 speed shifting, with SRAM 11-42T cassette and 28T alloy narrow wide crank

Oversized 31.8mm lightweight alloy A-head stem

Oversized 31.8mm handlebar

SRAM Level hydraulic disc brakes with 200mm front rotor and 180mm rear rotor

Factor Trail specific MTB saddle

Factor double lock-on MTB grip

CODES	М	L
Matte Black / Gloss Fluoro Green	18123	18124

GEOMETRY	М	L
STACK	613	623
REACH	440	456
STAND OVER HEIGHT	n/a	n/a
EFFECTIVE TOP TUBE	616	635
SEAT TUBE (CENTRE TO TOP)	430	489
SEAT ANGLE	74.0°	74.0°
HEAD TUBE LENGTH	105	115
HEAD ANGLE	68.5°	68.5°
WHEEL BASE	1170	1189
CHAIN STAY LENGTH	443	443
BB DROP	24	24
FORK RAKE	51	51
AXLE TO CROWN	551	551
REAR DROPOUT SPACING	148	148

FRAME	27.5" Plus dual suspension frame, 6061	GRIP	Lock-on grips, Kraton rubber	CASSETTE	SRAM 11 speed cassette 11 - 42T
	alloy with 130mm (5") travel. 1-1/8 - 1-1/2" head tube, BB91 press fit bottom bracket,	HEAD STEM	Factor 3D forged stem, 31.8mm 4 bolt	CHAIN	KMC X-11
	12x142mm rear axle, internal cable routing		stem, Ext: S/M/L=40mm	BRAKES	SRAM Level hydraulic disc brakes, 200mm
FORK	Manitou Machete Comp. Tapered alloy	CRANKSET	SRAM NX 11 speed 28T, L: S=170mm, M/ L=175mm		front 180mm rear rotors
	steerer, 140mm travel with QR15 Thru Axle	POTTOM	I I	WHEELS	27.5" Sun Ringle Duroc 40 40mm wide alloy 32h welded alloy rims. 12 x 142mm
REAR SHOCK	Rockshox Monarch R	BRACKET BB91 press fit cartridge bearings		rear hub and 15mm Thru Axle front hub	
		PEDALS	Low profile high impact resin	TYRES	Veetire T-Fatty. 27.5 x 2.8, wire bead
HEADSET	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings	F. DERAILLEUR	Nil	SADDLE	Factor MTB sport saddle
HANDLEBAR	Factor alloy riser bar 31.8mm W: 740mm,	R. DERAILLEUR	SRAM NX 11 speed	SEATPOST/	31.6mm alloy, micro adjust, L:400mm
	sweep: 5°	SHIFT LEVERS	SRAM NX 11 speed	CLAMP	
				EXTRAS	N/A



CODES

WHEEL BASE
CHAIN STAY LENGTH

BB DROP

FORK RAKE

AXLE TO CROWN

REAR DROPOUT SPACING

KEY FEATURES
New 27.5" Trail MTB specific alloy frame with integrated tapered H/T
Veetire Trail Taker 27.5" x 2.35" MTB tyres, with double wall Weinmann rims
SRAM NX 1 x 11 speed shifting, with SRAM 11-42T cassette and 28T alloy narrow wide crank
Manitou Markhor 120mm travel fork with hydraulic lockout
Oversized 31.8mm lightweight alloy A-head stem
Oversized 31.8mm handlebar
SRAM Level hydraulic disc brakes front and rear
Factor Trail specific MTB saddle
Factor double lock-on MTB grip

Matte Red / Matte Black	18134	18135	18136
GEOMETRY	S	M	L
STACK	605	614	623
REACH	400	412	449
STAND OVER HEIGHT	423	450	484
EFFECTIVE TOP TUBE	585	600	640
SEAT TUBE (CENTRE TO TOP)	380	430	490
SEAT ANGLE	73.0°	73.0°	73.0°
HEAD TUBE LENGTH	110	120	130
HEAD ANGLE	68.5°	68.5°	68.5°
WHEEL BASE	1099	1119	1160

440

45

42

510

440

45

42

510

440

45

42

510

135

FRAME		HEAD STEM	Factor 31.8mm 4 bolt stem,	CHAIN	KMC X-11
FORK	with tapered head tube, snake stays and replaceable derailleur hanger Manitou Markhor 27.5", 120mm travel with	CRANKSET	Ext: S/M/L=45mm SRAM NX 11 speed 28T, L: S=170mm, M/L =175mm	BRAKES	SRAM Level hydraulic disc brakes, 160mm rotors
REAR SHOCK	hydraulic lockout and preload	BOTTOM BRACKET	BSA threaded	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, alloy disc hubs and stainless spokes
REAR SHOCK		PEDALS	Low profile high impact resin	TYRES	Veetire Trail Taker 27.5 x 2.4" wire bead
HEADSET	A-head semi integrated 1-1/8" - 1.5" tapered	F. DERAILLEUR	Nil	SADDLE	Factor MTB sport saddle
HANDLEBAR	Alloy low riser, W: 700mm, R: 15mm, bore:	R. DERAILLEUR	SRAM NX 11 speed	SEATPOST/	Alloy two bolt micro adjust, 27.2mm,
	31.8mm, sweep: 5°	SHIFT LEVERS	SRAM NX 11 speed	CLAMP	L:350mm
GRIP	Lock-on grips, Kraton rubber	CASSETTE	SRAM 11 speed cassette 11 - 42T	EXTRAS	N/A



CODES

Matte Orange / Matte Copper

New 27.5" Trail MTB specific alloy frame with integrated H/T $$
Kenda 27.5" x 2.35" MTB tyres, with double wall Weinmann rims
1x 10 speed shifting, with Sunrace 11-42T cassette and 28T alloy narrow wide crank
RST Aerial 120mm travel Air Spring fork with hydraulic lockout
Oversized 31.8mm lightweight alloy A-head stem
Oversized 31.8mm handlebar
Promax Solve ST hydraulic disc brakes front and rear
Factor Trail specific MTB saddle
Factor double lock-on MTB grip

GEOMETRY	S	М	L
STACK	605	614	623
REACH	400	412	449
STAND OVER HEIGHT	423	450	484
EFFECTIVE TOP TUBE	585	600	640
SEAT TUBE (CENTRE TO TOP)	380	430	490
SEAT ANGLE	73.0°	73.0°	73.0°
HEAD TUBE LENGTH	110	120	130
HEAD ANGLE	68.5°	68.5°	68.5
WHEEL BASE	1099	1119	1160
CHAIN STAY LENGTH	440	440	440
BB DROP	45	45	45
FORK RAKE	42	42	42
AXLE TO CROWN	510	510	510
REAR DROPOUT SPACING	135	135	135

S 18137 М

18138

L

18139

SPECIFICATIONS

KEY FEATURES

FRAME		HEAD STEM	Factor 31.8mm 4 bolt stem, Ext: S/M/	CHAIN	KMC X-10
	with integrated head tube, snake stays and replaceable derailleur hanger	CRANKSET	L=45mm Prowheel Charm 28T L: S=170mm, M/	BRAKES	Promax DSK-923 hydraulic disc brakes with short reach adjust, 160mm rotors
FORK	RST Aerial 27.5 TnL, Air Spring, 120mm travel with hydraulic lockout and preload		L=175mm	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V
REAR SHOCK	,	BOTTOM BRACKET	BSA threaded		double wall disc specific rims, alloy disc hubs and stainless spokes
		PEDALS	Low profile high impact resin	TYRES	Kenda 27.5 x 2.35" wire bead
HEADSET	A-head semi integrated 1-1/8"	F. DERAILLEUR	Nil	SADDLE	Factor MTB sport saddle
HANDLEBAR	Alloy low riser, W: 700mm, R: 15mm, bore:	R. DERAILLEUR	SRAM X5	SEATPOST/	Alloy two bolt micro adjust, 27.2mm,
	31.8mm, sweep: 5°	SHIFT LEVERS	SRAM X5 Trigger, 10 speed	CLAMP	L:350mm
GRIP	Lock-on grips, Kraton rubber	CASSETTE	Sunrace CSMS3 10 speed cassette 11 - 42T	EXTRAS	N/A

L

18142

М

18141



CODES

Matte Black / Matte Fluoro Green

KEY FEATURES
New 27.5" Trail MTB specific alloy Frame with integrated H/T
Kenda 27.5" x 2.35" MTB tyres, with double wall Weinmann rims
$2\mathrm{x}9$ speed, Shimano Acera \slash Alivio shifting with cassette freewheel and Suntour XCM crank
RST Blaze 120mm travel fork with hydraulic lockout
Oversized 31.8mm lightweight alloy A-head stem
Oversized 31.8mm handlebar
Promax Solve ST hydraulic disc brakes front and rear
Factor Trail specific MTB saddle
Factor double lock-on MTB grip

GEOMETRY	S	М	L
STACK	605	614	623
REACH	400	412	449
STAND OVER HEIGHT	423	450	484
EFFECTIVE TOP TUBE	585	600	640
SEAT TUBE (CENTRE TO TOP)	380	430	490
SEAT ANGLE	73.0°	73.0°	73.0°
HEAD TUBE LENGTH	110	120	130
HEAD ANGLE	68.5°	68.5°	68.5°
WHEEL BASE	1099	1119	1160
CHAIN STAY LENGTH	440	440	440
BB DROP	45	45	45
FORK RAKE	42	42	42
AXLE TO CROWN	510	510	510
REAR DROPOUT SPACING	135	135	135

s

18140

FRAME	27.5" lightweight trail specific alloy frame	HEAD STEM	Factor 31.8mm 4 bolt stem, Ext: S/M/	CHAIN	KMC Z-99
FORK		CRANKSET	L=45mm Suntour XCM-D36-22PBSQ alloy 36 x 22T L: S=170mm, M/L=175mm	BRAKES	Promax DSK-923 hydraulic disc brakes with short reach adjust, 160mm rotors 27.5" Weinmann U-32 alloy 32 hole F/V
	hydraulic lockout and preload, alloy crown and lowers.	BOTTOM BRACKET	Cartridge bottom bracket		double wall disc specific rims, alloy disc hubs and stainless spokes
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	TYRES	Kenda 27.5 x 2.35" wire bead
HEADSET	A-head semi integrated 1-1/8"	F. DERAILLEUR	Shimano FD-T3000	SADDLE	Factor MTB sport saddle
HANDLEBAR	Alloy low riser, W: 700mm, R: 15mm, bore:	R. DERAILLEUR	RD-M4000 Alivio	SEATPOST/ CLAMP	Alloy two bolt micro adjust, 27.2mm, L:350mm
	31.8mm, sweep: 5°		Shimano Acera SL-M3000	EXTRAS	
GRIP	Lock-on grips, Kraton rubber	CASSETTE	Shimano 9 speed cassette 11-34T		1



KEY FEATURES

New 29" cross country MTB specific alloy frame with integrated

Veetire Trail Taker 29" x 2.20" MTB tyres, with double wall Weinmann rims

SRAM NX 1 x 11 speed shifting, with SRAM 11-42T cassette and 28T alloy narrow wide crank

Manitou Markhor 100mm travel fork with hydraulic lockout

Oversized 31.8mm lightweight alloy A-head stem

Oversized 31.8mm handlebar

SRAM Level hydraulic disc brakes front and rear

Factor Trail specific MTB saddle

Factor double lock-on MTB grip

CODES	S	М	L
Matte Black / Matte Red	18125	18126	18127

GEOMETRY	S	М	L
STACK	609	618	627
REACH	404	421	438
STAND OVER HEIGHT	420	443	476
EFFECTIVE TOP TUBE	590	610	630
SEAT TUBE (CENTRE TO TOP)	400	440	500
SEAT ANGLE	73.0°	73.0°	73.0°
HEAD TUBE LENGTH	100	110	120
HEAD ANGLE	69.0°	69.0°	69.0°
WHEEL BASE	1100	1121	1141
CHAIN STAY LENGTH	435	435	435
BB DROP	60	60	60
FORK RAKE	51	51	51
AXLE TO CROWN	510	510	510
REAR DROPOUT SPACING	135	135	135

FRAME	29er lightweight XC specific alloy frame with tapered head tube, snake stays and	HEAD STEM	Factor 31.8mm 4 bolt stem, Ext:S/ M=75mm, L=90mm	CHAIN	KMC X-11
FORK	replaceable derailleur hanger Manitou Markhor 29", 100mm travel with	CRANKSET	SRAM NX 11 speed 28T, L: S=170mm, M/L =175mm		SRAM Level hydraulic disc brakes, 160mm rotors
REAR SHOCK	hydraulic lockout and preload	BOTTOM BRACKET	BSA threaded		29" Weinmann U-26 alloy double wall disc rim, 32 hole F/V, anodised disc hubs and stainless spokes
		PEDALS	Low profile high impact resin	TYRES	Veetire Trail Taker 29 x 2.20" wire bead
HEADSET	A-head semi integrated 1-1/8" - 1-1/2"	F. DERAILLEUR	Nil	SADDLE	Factor MTB sport saddle
	tapered	R. DERAILLEUR	SRAM NX 11 speed	SEATPOST/	27.2mm alloy, micro adjust with twin bolt
HANDLEBAR	Factor butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	SHIFT LEVERS	SRAM NX 11 speed	CLAMP	head, L:400mm
GRIP	Lock-on grips, Kraton rubber	CASSETTE	SRAM 11 speed cassette 11 - 42T	EXTRAS	N/A



CODES

Matte Black / Matte Fluoro Green

KEY FEATURES
New 29" cross country MTB specific alloy frame with integrated $\rm H/T$
Kenda 29" x 2.1" MTB tyres, with double wall Weinmann rims
1 x 10 speed shifting, with Sunrace 11-42T cassette and 28T alloy narrow wide crank
RST Aerial 100mm travel Air Spring fork with hydraulic lockout
Oversized 31.8mm lightweight alloy A-head stem
Oversized 31.8mm handlebar
Promax Solve ST hydraulic disc brakes front and rear
Factor Trail specific MTB saddle
Factor double lock-on MTB grip

GEOMETRY	s	М	L
STACK	609	618	627
REACH	404	421	438
STAND OVER HEIGHT	420	443	476
EFFECTIVE TOP TUBE	590	610	630
SEAT TUBE (CENTRE TO TOP)	400	440	500
SEAT ANGLE	73.0°	73.0°	73.0°
HEAD TUBE LENGTH	100	110	120
HEAD ANGLE	69.0°	69.0°	69.0°
WHEEL BASE	1100	1121	1141
CHAIN STAY LENGTH	435	435	435
BB DROP	60	60	60
FORK RAKE	51	51	51
AXLE TO CROWN	510	510	510
REAR DROPOUT SPACING	135	135	135

s

18128

М

18129

L

18130

FRAME	29er lightweight XC specific alloy frame	HEAD STEM	Factor 31.8mm 4 bolt stem,	CHAIN	KMC X-10
FORK	with tapered head tube, snake stays and replaceable derailleur hanger RST Aerial 29 TnL, Air Spring, 100mm travel	CRANKSET	Ext:S/ M=75mm, L=90mm Prowheel Charm 28T L: S=170mm, M/L=175mm	BRAKES	Promax Solve ST hydraulic disc brakes with reach adjust, 160mm rotors
REAR SHOCK	with hydraulic lockout and preload N/A	BOTTOM BRACKET	BSA threaded	WHEELS	29" Weinmann U-26 alloy double wall disc rim, 32 hole F/V, anodised disc hubs and stainless spokes
		PEDALS	Low profile high impact resin	TYRES	Kenda 29 x 2.1", wire bead
HEADSET	A-head semi integrated 1-1/8"	F. DERAILLEUR	Nil	SADDLE	Factor MTB sport saddle
HANDLEBAR	Factor butted alloy flat bar bore: 31.8mm	R. DERAILLEUR	SRAM X-5	SEATPOST/	27.2mm alloy, micro adjust with twin bolt
	W: 700mm, sweep: 9°	SHIFT LEVERS	SRAM X5 Trigger, 10 speed	CLAMP	head, L:400mm
GRIP	Lock-on grips, Kraton rubber	CASSETTE	Sunrace CSMS3 10 speed cassette 11 - 42T	EXTRAS	N/A



New 29" cross country MTB specific alloy frame with integrated $\ensuremath{\mathrm{H/T}}$

Kenda 29" x 2.1" MTB tyres, with double wall Weinmann rims

 $2\,x$ 9 speed, Shimano Acera \rightthreetimes Alivio shifting with cassette freewheel and Suntour XCM crank

RST Blaze 100mm travel fork with hydraulic lockout

Oversized 31.8mm lightweight alloy A-head stem

Oversized 31.8mm handlebar

Promax Solve ST hydraulic disc brakes front and rear

Factor Trail specific MTB saddle

Factor double lock-on MTB grip

CODES	S	M	L
Matte Black / Matte Fluoro Orange	18131	18132	18133

S	М	L
609	618	627
404	421	438
420	443	476
590	610	630
400	440	500
73.0°	73.0°	73.0°
100	110	120
69.0°	69.0°	69.0°
1100	1121	1141
445	445	445
60	60	60
51	51	51
510	510	510
135	135	135
	609 404 420 590 400 73.0° 100 69.0° 1100 445 60 51	609 618 404 421 420 443 590 610 400 440 73.0° 73.0° 100 110 69.0° 69.0° 1100 1121 445 445 60 60 51 51 510 510

FRAME	29er lightweight XC specific alloy frame	HEAD STEM		CHAIN	KMC Z-99
FORK	with tapered head tube, snake stays and replaceable derailleur hanger RST Blaze 29 TnL, 100mm travel with	CRANKSET	Ext:S/M=75mm, L=90mm Suntour XCM-D36-22PBSQ alloy 36 x 22T L: S=170mm, M/L=175mm	BRAKES	Promax DSK-923 hydraulic disc brakes with short reach adjust, 160mm rotors
	hydraulic lockout and preload, alloy crown and lowers.	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	29" Weinmann U-26 alloy double wall disc rim, 32 hole F/V, anodised disc hubs and stainless spokes
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	TYRES	Kenda 29 x 2.1", wire bead
HEADSET	A-head semi integrated 1-1/8"	F. DERAILLEUR	Shimano FD-T3000	SADDLE	Factor MTB sport saddle
HANDLEBAR	Factor butted alloy flat bar bore: 31.8mm	R. DERAILLEUR	RD-M4000 Alivio	SEATPOST/ CLAMP	Alloy 27.2mm alloy, L:400mm, micro adjust with quick release clamp
	W: 700mm, sweep: 9°	SHIFT LEVERS	Shimano Acera SL-M3000		'
GRIP	Lock-on grips, Kraton rubber	CASSETTE	Shimano 9 speed cassette 11-34T	EXTRAS	IN/A



KEY FEATURES New 29" MTB specific alloy frame with integrated H/T Kenda 29" x 2.1" MTB tyres, with new double wall rims Oversized 31.8mm alloy A-head stem Oversized 31.8mm handlebar 24 Speed Shimano Rapid-Fire shifting RST Gila 100mm travel front suspension with mechanical lockout Promax Solve ST hydraulic disc brakes front and rear Apollo custom comfort grip Selle Royal saddle for maximum riding comfort

			l	·
CODES	S	M	L	XL
Matte Black / Matte White / Matte Red	18143	18144	18145	18146
Matte Black / Gloss Fluoro Orange / Gloss black	18147	18148	18149	18150
GEOMETRY	S	М	L	XL
STACK	599	609	627	642
REACH	392	409	411	427
STAND OVER HEIGHT	417	435	466	490
EFFECTIVE TOP TUBE	575	595	615	635
SEAT TUBE (CENTRE TO TOP)	400	430	480	520
SEAT ANGLE	73.0°	73.0°	72.0°	72.0°
HEAD TUBE LENGTH	100	110	125	140
HEAD ANGLE	69.0°	69.0°	70.0°	70.0°
WHEEL BASE	1102	1123	1123	1144
CHAIN STAY LENGTH	450	450	450	450
BB DROP	60	60	60	60
FORK RAKE	51	51	51	51
AXLE TO CROWN	500	500	500	500
REAR DROPOUT SPACING	135	135	135	135

FRAME	Lightweight 6061 alloy disc specific 29er	HEAD STEM	Forged alloy A-head Bore: 31.8mm	CHAIN	KMC Z-7
FORK	frame with taper wall technology and integrated head tube	CRANKSET	Ext: S/M=75mm, L=90mm, XL=105mm Suntuor XCT 42 x 32 x 22T	BRAKES	Promax Solve DSK-925 hydraulic disc brakes with reach adjust, 160mm rotors
FORK	RST Gila 29 ML, 100mm travel with Mechanical lockout and preload, 51mm offset, alloy crown and lowers.	BOTTOM BRACKET	L: S/M=170mm, L/XL=175mm Cartridge bottom bracket	WHEELS	29" alloy double wall disc rim, 32 hole A/V, anodised disc hubs and stainless spokes
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	TYRES	Kenda 29 x 2.1", wire bead
HEADSET	 Semi-Integrated A-head 1-1/8"	F. DERAILLEUR	Shimano FD-TY700	SADDLE	Factor MTB sport saddle
HANDLEBAR		R. DERAILLEUR	Shimano Altus RD-M310	SEATPOST/	Alloy 27.2mm alloy, L:400mm, micro adjust
IMINDEEDAN	sweep: 9°	SHIFT LEVERS	Shimano Altus 24 speed	CLAMP	with quick release clamp
GRIP	Kraton rubber closed end grips	CASSETTE	Shimano HG-200 8 speed cassette 12-32T	EXTRAS	N/A



KEY FEATURES New 29" MTB specific alloy frame with integrated H/T Kenda 29" x 2.1" MTB tyres, with new double wall rims Oversized 31.8mm alloy A-head stem Oversized 31.8mm handlebar 21 speed Shimano EZ-Fire shifting 80mm travel front suspension Tektro mechanical disc brakes front and rear with 160mm rotors Apollo custom comfort grip Selle Royal saddle for maximum riding comfort

CODES	S	М	L	XL
Matte Black / Matte Red	18151	18152	18153	18154
Matte Black / Matte Fluoro Green / Matte Grey	18155	18156	18157	18158
GEOMETRY	s	м	L	XL
STACK	599	609	627	642
REACH	392	409	411	427
STAND OVER HEIGHT	417	435	466	490
EFFECTIVE TOP TUBE	575	595	615	635
SEAT TUBE (CENTRE TO TOP)	400	430	480	520
SEAT ANGLE	73.0°	73.0°	72.0°	72.0°
HEAD TUBE LENGTH	100	110	125	140
HEAD ANGLE	69.0°	69.0°	70.0°	70.0°
WHEEL BASE	1102	1123	1123	1144
CHAIN STAY LENGTH	450	450	450	450
BB DROP	60	60	60	60
FORK RAKE	51	51	51	51
AXLE TO CROWN	500	500	500	500
REAR DROPOUT SPACING	135	135	135	135

FRAME	Lightweight 6061 alloy disc specific 29er frame with taper wall technology and	HEAD STEM	Forged alloy A-head Bore: 31.8mm Ext: S/M=90mm, L/XL=105mm	CHAIN	KMC Z-51
	integrated head tube	CRANKSET	Cold forged 42 x 32 x 22T L=170mm		Tektro MD-M280 mechanical disc brakes with 160mm rotors
FORK	29" suspension fork, 80mm travel, coil spring, alloy crown and alloy lowers.	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	29" alloy double wall disc rim, 32 hole A/V, anodised disc hubs and stainless
REAR SHOCK	N/A	PEDALS	Low profile high impact resin		spokes
		F. DERAILLEUR	Shimano TY-500	TYRES	Kenda 29 x 2.1", wire bead
HEADSET	Semi-Integrated A-head 1-1/8"	R. DERAILLEUR	Shimano TX-800 7 speed	SADDLE	Factor MTB sport saddle
HANDLEBAR	Alloy flat bar bore: 31.8mm W: 640mm, sweep: 6°	SHIFT LEVERS	'	SEATPOST/ CLAMP	Alloy 27.2mm alloy, L:350mm, micro adjust
GRIP	Kraton rubber closed end grips	CASSETTE	Shimano HG-20 7 speed cassette 12-28T	EXTRAS	N/A



KEY FEATURES New 27.5" MTB specific alloy frame with integrated H/T Kenda 27.5" x 2.1" MTB tyres, with double wall rims 24 Speed Shimano Rapid-Fire shifting with cassette Oversized 31.8mm alloy A-head stem Oversized 31.8mm handlebar 80mm travel front suspension with lockout Promax Solve hydraulic disc brakes front and rear New double wall alloy rims Apollo custom comfort grip Selle Royal saddle for maximum riding comfort

CODES	S	м	L	XL
Matte Black / Matte Charcoal / Matte Blue	18160	18161	18162	18163
Matte Black / Matte Charcoal / Matte Red	18165	18166	18167	18168
GEOMETRY	s	М	L	XL
STACK	602	614	626	637
REACH	377	397	414	429
STAND OVER HEIGHT	435	454	478	505
EFFECTIVE TOP TUBE	555	585	605	630
SEAT TUBE (CENTRE TO TOP)	410	440	480	530
SEAT ANGLE	73.5°	73.0°	73.0°	72.5°
HEAD TUBE LENGTH	120	130	140	150
HEAD ANGLE	69.0°	69.5°	70.0°	70.5°
WHEEL BASE	1078	1094	1108	1121
CHAIN STAY LENGTH	440	440	440	440
BB DROP	45	45	45	45
FORK RAKE	42	42	42	42
AXLE TO CROWN	495	495	495	495
REAR DROPOUT SPACING	135	135	135	135

FRAME	27.5" lightweight 6061 alloy disc specific frame with integrated head tube, snake	HEAD STEM	Factor 31.8mm 4 bolt stem, Ext: XS/ S=75mm, M/L=90mm, XL=105mm	CHAIN	KMC Z-7
	stays and replaceable derailleur hanger	CRANKSET		BRAKES	Promax Solve DSK-925 hydraulic disc brakes with reach adjust, 160mm rotors
FORK	CH-565-ML 27.5, 80mm travel, mechanical lockout, preload.	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless
REAR SHOCK	N/A		Low profile high impact resin		spokes
		F. DERAILLEUR	Shimano TY-700		Kenda 27.5 x 2.1" wire bead
HEADSET	Semi-Integrated A-head 1-1/8"	R. DERAILLEUR	Shimano TX-800 8 speed	SADDLE	Factor MTB sport saddle
HANDLEBAR	Alloy low riser, W: 640mm, R: 20mm, bore: 31.8mm, sweep: 6°		Shimano Altus 24 speed	SEATPOST/ CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
GRIP	Kraton grip	CASSETTE	Shimano HG-200 8 speed cassette 12-32T	EXTRAS	N/A

ASPIRE 20



KEY FEATURESNew 27.5" MTB speci

New 27.5" MTB specific alloy frame with integrated H/T $\,$

Kenda 27.5" x 2.1" MTB tyres, with double wall rims

Oversized 31.8mm alloy A-head stem

Oversized 31.8mm handlebar

21 speed Shimano EZ-Fire shifting

80mm travel front suspension

JAK-8 mechanical disc brakes front and rear with 160mm rotors $\,$

New double wall alloy rims

Selle Royal saddle for maximum riding comfort

CODES	XS	S	М	L	XL
Matte Black / Matte Charcoal / Matte Fluoro Green	18169	18170	18171	18172	18173
Matte Black / Matte Blue / Matte Lime	18174	18175	18176	18177	18178
GEOMETRY	xs	s	м	L	XL
STACK	593	602	614	626	637
REACH	370	377	397	414	429
STAND OVER HEIGHT	406	435	454	478	505
EFFECTIVE TOP TUBE	540	555	585	605	630
SEAT TUBE (CENTRE TO TOP)	355	410	440	480	530
SEAT ANGLE	74.0°	73.5°	73.0°	73.0°	72.5°
HEAD TUBE LENGTH	110	120	130	140	150
HEAD ANGLE	69.0°	69.0°	69.5°	70.0°	70.5°
WHEEL BASE	1056	1078	1094	1108	1121
CHAIN STAY LENGTH	440	440	440	440	440
BB DROP	45	45	45	45	45
FORK RAKE	42	42	42	42	42
AXLE TO CROWN	495	495	495	495	495
REAR DROPOUT SPACING	135	135	135	135	135

FRAME		HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=75mm,	CHAIN	KMC Z-51
	frame with integrated head tube, snake stays and replaceable derailleur hanger	CRANKSET	M/L=90mm, XL=105mm Alloy MTB crank 42 x 32 x 22T L=170mm	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	27.5" suspension fork, 80mm travel	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless
REAR SHOCK	N/A		Low profile high impact resin	TYPES	spokes
HEADSET	 Semi-Integrated A-head 1-1/8"	F. DERAILLEUR	Shimano TZ-30		
HANDLEBAR	Low riser, W: 640mm, R: 20mm, bore:		Shimano TY-300	SEATPOST/	Alloy micro adjust 27.2mm, L:350mm with
	31.8mm, sweep: 6°		Shimano EF-41 EZ FIRE 21 speed	CLAMP	QR clamp
GRIP	Kraton grip	CASSETTE	Shimano HG-20 7 speed cassette 12-28T	EXTRAS	N/A



CODES

Gloss Pink / Gloss Black / Gloss Blue

KEY FEATURES
27.5" Women's specific MTB alloy frame
Kenda 27.5" x 2.1" MTB tyres, with double wall Weinmann rims.
Oversized 31.8mm alloy A-head stem
Oversized 31.8mm handlebar.
21 speed Shimano EZ-Fire shifting.
80mm travel front suspension with lockout
Tektro mechanical disc brakes front and rear with 160mm rotors
Double wall alloy rims.
Reinforced resin pedals
Soft and comfortable women's specific saddle

GEOMETRY	xs	s	м
STACK	584	602	616
REACH	373	381	397
STAND OVER HEIGHT	382	412	437
EFFECTIVE TOP TUBE	540	565	585
SEAT TUBE (CENTRE TO TOP)	355	400	440
SEAT ANGLE	74.0°	73.0°	73.0°
HEAD TUBE LENGTH	100	115	130
HEAD ANGLE	69.0°	70.0°	70.0°
WHEEL BASE	1058	1061	1082
CHAIN STAY LENGTH	435	435	435
BB DROP	45	45	45
FORK RAKE	42	42	42
AXLE TO CROWN	495	495	495
REAR DROPOUT SPACING	135	135	135

XS

17212

s

17213

М

17214

FRAME	Lightweight female specific 27.5" double butted alloy frame, snake stays and	HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=90mm, M=90mm	CHAIN	KMC Z-51
	replaceable derailleur hanger	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	BRAKES	Tektro MD-M280 mechanical disc brakes with 160mm rotors
FORK	27.5" suspension fork, 80mm travel	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless
REAR SHOCK	N/A		Low profile high impact resin	T)/DE6	spokes
HEADSET	A-head 1-1/8"	F. DERAILLEUR	Shimano TY-500		Kenda 27.5 x 2.1" wire bead Factor MTB sport saddle
HANDLEBAR	Low riser, W: 600mm, R: 20mm, bore:	R. DERAILLEUR	Shimano Altus 21 speed	SEATPOST/	Alloy micro adjust 27.2mm, L:350mm with
HANDLEDAK	31.8mm, sweep: 6°	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	CLAMP	
GRIP	Kraton grip	CASSETTE	Shimano HG-20 7 speed cassette 12-28T	EXTRAS	N/A



New 27.5" MTB specific alloy frame with integrated H/T 80mm travel front suspension 27.5" x 2.1" MTB tyres, with double wall rims Oversized 31.8mm alloy A-head stem Oversized 31.8mm handlebar 21 speed Shimano EZ-Fire shifting Low maintenance Promax V-Brakes New double wall alloy rims

Selle Royal saddle for maximum riding comfort

CODES	XS	S	М	L	XL
Gloss Navy Blue / Gloss Black / Gloss Red	18182	18183	18184	18185	18186
Gloss Black / Gloss Red / Gloss White	18187	18188	18189	18190	18191
GEOMETRY	xs	s	М	L	XL
STACK	593	602	614	626	637
REACH	370	377	397	414	429
STAND OVER HEIGHT	406	435	454	478	505
EFFECTIVE TOP TUBE	540	555	585	605	630
SEAT TUBE (CENTRE TO TOP)	355	410	440	480	530
SEAT ANGLE	74.0°	73.5°	73.0°	73.0°	72.5°
HEAD TUBE LENGTH	110	120	130	140	150
HEAD ANGLE	69.0°	69.0°	69.5°	70.0°	70.5°
WHEEL BASE	1056	1078	1094	1108	1121
CHAIN STAY LENGTH	440	440	440	440	440
BB DROP	45	45	45	45	45
FORK RAKE	42	42	42	42	42
AXLE TO CROWN	495	495	495	495	495
REAR DROPOUT SPACING	135	135	135	135	135

SPECIFICATIONS

KEY FEATURES

FRAME	Lightweight 27.5" double butted frame,	GRIP	Kraton grip	CASSETTE	Shimano 7 speed 14-28T freewheel
	snake stays and replaceable derailleur hanger	HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=70mm,	CHAIN	KMC Z-51
FORK	27.5" suspension fork, 80mm travel	CD 4 1 1/CET	M/L=90mm, XL=105mm	BRAKES	Alloy linear pull brakes
	·	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	WHEELS	27.5" alloy 32 hole A/V double wall rims,
REAR SHOCK	N/A	BOTTOM BRACKET	Cartridge bottom bracket	T1/0.50	alloy hubs and stainless spokes
		PEDALS	Low profile high impact resin	TYRES	
HEADSET	A-head 1-1/8"	F. DERAILLEUR	Shimano TZ-30		Factor MTB sport saddle
HANDLEBAR	Low riser, W: 640mm, R: 20mm, bore: 31.8mm, sweep: 6°	R. DERAILLEUR	Shimano TY-300	SEATPOST/ CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
	1 and 1 and 2 and	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	EXTRAS	N/A



CODES

Gloss White / Gloss Purple / Gloss Blue

KEY FEATURES
27.5" Women's specific MTB alloy frame
27.5" x 2.1" MTB tyres, with double wall Weinmann rims.
Oversized 31.8mm alloy A-head stem
Oversized 31.8mm handlebar.
21 speed Shimano EZ-Fire shifting.
80mm travel front suspension.
Low maintenance Promax V-Brakes.
New double wall alloy rims.
New reinforced resin pedals
Selle Royal saddle for maximum riding comfort.

GEOMETRY	XS	S	М
STACK	584	602	616
REACH	373	381	397
STAND OVER HEIGHT	382	412	437
EFFECTIVE TOP TUBE	540	565	585
SEAT TUBE (CENTRE TO TOP)	355	400	440
SEAT ANGLE	74.0°	73.0°	73.0°
HEAD TUBE LENGTH	100	115	130
HEAD ANGLE	69.0°	70.0°	70.0°
WHEEL BASE	1058	1061	1082
CHAIN STAY LENGTH	435	435	435
BB DROP	45	45	45
FORK RAKE	42	42	42
AXLE TO CROWN	495	495	495
REAR DROPOUT SPACING	135	135	135

XS

17225

s

17226

М

17227

FRAME	Lightweight female specific 27.5" double	GRIP	Kraton grip	CASSETTE	Shimano 7 speed 14-28T freewheel
	butted frame, snake stays and replaceable derailleur hanger	HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=70mm,	CHAIN	KMC Z-51
FORK	27.5" suspension fork, 80mm travel	CD ANICCET	M=90mm	BRAKES	Alloy linear pull brakes
		CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	WHEELS	27.5" alloy 32 hole A/V double wall rims,
REAR SHOCK	N/A	BOTTOM BRACKET	Cartridge bottom bracket	T)/DE6	alloy hubs and stainless spokes
		PEDALS	Low profile high impact resin		Kenda 27.5 x 2.1" wire bead
HEADSET	A-head 1-1/8"	F. DERAILLEUR	Shimano TZ-30		Factor MTB sport saddle
HANDLEBAR	Low riser, W: 600mm, R: 20mm, bore: 31.8mm, sweep: 6°	R. DERAILLEUR	Shimano TY-300	SEATPOST/ CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
	, элолин, эмеер. о	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	EXTRAS	N/A



CODES

KEY FEATURES
26" men's specific geometry alloy frame
Front suspension for maximum riding comfort
Strong 26" wheels, with easy rolling semi slick tyres
Quilled stem for maximum adjustability
Soft and comfortable MTB saddle
21 speed, Shimano EZ-fire shifting
Lightweight alloy rims

Gloss Black / Gloss Lime / Gloss Blue	18195	18196
GEOMETRY	XS	s
STACK	523	533
REACH	380	387
STAND OVER HEIGHT	389	415
EFFECTIVE TOP TUBE	530	550
SEAT TUBE (CENTRE TO TOP)	330	380
SEAT ANGLE	74.0°	73.0°
HEAD TUBE LENGTH	100	110
HEAD ANGLE	70.0°	70.0°
WHEEL BASE	1035	1051
CHAIN STAY LENGTH	430	430
BB DROP	35	35
FORK RAKE	38	38
AXLE TO CROWN	435	435
REAR DROPOUT SPACING	135	135

XS

s

FRAME	Butted 6061 aluminium low standover	GRIP	Kraton comfort grip	CASSETTE	Shimano 7 speed 14-28T freewheel
	frame with snake stays and replaceable derailleur hanger	HEAD STEM	Alloy quill stem 1-1/8, L: 80mm, bore:	CHAIN	KMC Z-51
FORK	26" suspension, 50mm travel coil spring,	CD 11465T	25.4mm	BRAKES	Alloy linear pull brakes
	pressed crown with Hi-Ten lowers	CRANKSET	Alloy MTB crank 42 x 32 x 22T L: 170mm	WHEELS	26" alloy 32 hole A/V rims, quick release
REAR SHOCK	N/A	BOTTOM BRACKET	Nutted type		front wheel. Stainless spokes
			l Langue	TYRES	26 x 2.0" wire bead
HEADSET	Threaded semi-sealed 1-1/8"		Non-slip resin	SADDLE	Factor Comfortech saddle
HANDLEBAR	Low riser, W: 580mm, R: 20mm, bore:	F. DERAILLEUR	Shimano TZ-30 for 31.8	SEATPOST/	27.2mm L:300mm with QR clamp
HANDELDAN	25.4mm, sweep: 6°	R. DERAILLEUR	Shimano TY-300	CLAMP	·
		SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	EXTRAS	Kickstand



26" women's specific geometry with low step through style frame Front suspension with lockout for maximum ride ability and comfort Strong 26" wheels with double wall rims and easy rolling semi slick tyres Promax mechanical disc brakes with alloy hubs Alloy A-head Stem, with threadless steer tube Soft and comfortable women's specific saddle 21 Speed, Shimano EZ-fire shifting with cassette

GEOMETRY	XS	S	М
STACK	533	551	570
REACH	387	396	411
STAND OVER HEIGHT	325	334	344
EFFECTIVE TOP TUBE	540	565	585
SEAT TUBE (CENTRE TO TOP)	350	400	450
SEAT ANGLE	74.0°	73.0°	73.0°
HEAD TUBE LENGTH	110	130	150
HEAD ANGLE	70.0°	70.0°	70.0°
WHEEL BASE	1035	1051	1072
CHAIN STAY LENGTH	430	430	430
BB DROP	35	35	35
FORK RAKE	38	38	38
AXLE TO CROWN	435	435	435
REAR DROPOUT SPACING	135	135	135

XS

16387

CODES

Gloss White / Gloss Black / Gloss Purple s

16388

М

16389

SPECIFICATIONS

KEY FEATURES

FRAME	Butted 6061 disc aluminium low step	GRIP	Kraton comfort grip	CHAIN	KMC Z-51
	through women's specific frame with snake stays and replaceable derailleur hanger	HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=70mm, M=90mm	BRAKES	Promax DSK 300 mechanical disc brakes with 160mm rotors
FORK	Suspension fork with lockout, 60mm	CRANKSET	Alloy MTB crank 42 x 34 x 24T L=170mm	WHEELS	Double wall 32 hole A/V rims, alloy disc
	travel with preload, alloy crown and brace, Hi-Ten lowers, coil spring	BOTTOM BRACKET	Cartridge bottom bracket		hubs with QR, cassette rear, stainless spokes
REAR SHOCK	N/A	PEDALS	Non-slip with inlaid TPE tread	TYRES	26 x 2.0" wire bead
			Shimano TX-50 for 31.8	SADDLE	Factor Comfortech women's specific
HEADSET	A-head 1-1/8"	R. DERAILLEUR	1	SEATPOST/ CLAMP	Alloy micro adjust 27.2mm, L:300mm with QR clamp
HANDLEBAR	Low riser, W: 580mm, R: 20mm, bore: 25.4mm, sweep: 6°	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	EXTRAS	N/A
,	•	CASSETTE	Shimano HG-20 7 speed cassette 12-28T		•



26" women's specific geometry with low step through style frame Front suspension for maximum riding comfort

Strong 26" wheels with double wall rims and easy rolling semi slick tyres

Allov hubs

Alloy A-head stem, with threadless steer tube

Soft and comfortable women's specific saddle

21 speed, Shimano EZ-fire shifting

CODES	XS	S	M
Gloss Light Pink / Gloss White	16390	16391	16392

GEOMETRY	XS	S	М
STACK	533	551	570
REACH	387	396	411
STAND OVER HEIGHT	325	334	344
EFFECTIVE TOP TUBE	540	565	585
SEAT TUBE (CENTRE TO TOP)	350	400	450
SEAT ANGLE	74.0°	73.0°	73.0°
HEAD TUBE LENGTH	110	130	150
HEAD ANGLE	70.0°	70.0°	70.0°
WHEEL BASE	1035	1051	1072
CHAIN STAY LENGTH	430	430	430
BB DROP	35	35	35
FORK RAKE	38	38	38
AXLE TO CROWN	435	435	435
REAR DROPOUT SPACING	135	135	135

FRAME		GRIP	Kraton comfort grip	CASSETTE	Shimano 7 speed 14-28T freewheel
	women's specific frame with snake stays and replaceable derailleur hanger	HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=70mm,	CHAIN	KMC Z-51
FORK	Suspension fork with 50mm travel, alloy		M=90mm	BRAKES	Alloy linear pull brakes
	crown and brace, Hi-Ten lowers, coil spring	CRANKSET	Alloy MTB crank 42 x 34 x 24T L=170mm	WHEELS	Alloy double wall 32 hole A/V rims, alloy
REAR SHOCK	I N/A	воттом	Cartridge bottom bracket		QR hubs, Stainless spokes
REAR SHOCK 11VA		BRACKET		TYRES	26 x 2.0" wire bead
HEADSET	 A-head 1-1/8"	PEDALS	Non-slip with inlaid TPE tread	SADDLE	Factor Comfortech women's specific
	1	F. DERAILLEUR	Shimano TX-50 for 31.8	SEATPOST/	Alloy micro adjust 27.2mm, L:300mm with
HANDLEBAR	Low riser, W: 580mm, R: 20mm, bore: 25.4mm, sweep: 6°	R. DERAILLEUR	Shimano TX-55		QR clamp
		SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	EXTRAS	Kickstand



KEY FEATURES 26" women's specific geometry with low step through style frame Front suspension for maximum riding comfort Strong 26" wheels, with easy rolling semi slick tyres Quilled stem for maximum adjustability Soft and comfortable women's specific saddle 21 speed, Shimano EZ-fire shifting

CODES	xs	S	М
Gloss White / Gloss Chrome / Gloss Lime	16396	16397	16398
Gloss Pink / Gloss White / Gloss Blue	16399	16400	16401
Gloss White / Gloss Black / Gloss Purple	16471	16472	16473
GEOMETRY	xs	S	М
STACK	533	551	570
REACH	387	396	411
STAND OVER HEIGHT	325	334	344
EFFECTIVE TOP TUBE	540	565	585
SEAT TUBE (CENTRE TO TOP)	350	400	450
SEAT ANGLE	74.0°	73.0°	73.0°
HEAD TUBE LENGTH	110	130	150
HEAD ANGLE	70.0°	70.0°	70.0°
WHEEL BASE	1035	1051	1072
CHAIN STAY LENGTH	430	430	430
BB DROP	35	35	35
FORK RAKE	38	38	38
AXLE TO CROWN	435	435	435
REAR DROPOUT SPACING	135	135	135

FRAME	Butted 6061 aluminium low step through	GRIP	Kraton comfort grip	CASSETTE	Shimano 7 speed 14-28T freewheel
	women's specific frame with snake stays and replaceable derailleur hanger	HEAD STEM	Alloy quill stem 1-1/8, L: 80mm, bore:	CHAIN	KMC Z-51
FORK	26", 50mm travel coil spring, pressed crown	6D 4 N W 6ET	25.4mm	BRAKES	Alloy linear pull brakes
	with Hi-Ten lowers		Alloy MTB crank 42 x 32 x 22T L: 170mm	WHEELS	
REAR SHOCK	N/A		Nutted type		wheel. Stainless spokes
KEAK SHOCK	IVA	BRACKET		TYRES	26 x 2.0" wire bead
		PEDALS	Non-slip resin	SADDLE	Factor Comfortech women's specific
HEADSET	Threaded semi-sealed 1-1/8"	F DERAILLEUR	Shimano TZ-30 for 31.8		· · · · · · · · · · · · · · · · · · ·
HANDLEBAR	Low riser, W: 580mm, R: 20mm, bore:		1	SEATPOST/	27.2mm L:300mm with QR clamp
13.11(2-22)(11(25.4mm, sweep: 6°	R. DERAILLEUR	Shimano TX-35	CLAMP	
		SHIFT LEVERS	Shimano FF-41 F7 FIRE 21 speed	EXTRAS	Kickstand



Apollo's carbon fat frame tapered head tube, with 12mm thru axle rear

Apollo's carbon fat bike fork, with 15mm axle and tapered steer tube.

VeeRubber 26" x 4.5" Snow Shoe fat tyres.

SRAM X7/X9 2 x 10 speed shifting.

FSA Comet fat bike crank.

SRAM DB5 hydraulic disc brakes 180mm front and 160mm rear.

16286

GEOMETRY	М	L
STACK	593	616
REACH	419	437
STAND OVER HEIGHT		
EFFECTIVE TOP TUBE	600	625
SEAT TUBE (CENTRE TO TOP)	430	483
SEAT ANGLE	73.0°	73.0°
HEAD TUBE LENGTH	110	130
HEAD ANGLE	69.0°	70.0°
WHEEL BASE	1148	1170
CHAIN STAY LENGTH	455	455
BB DROP	60	60
FORK RAKE	51	51
AXLE TO CROWN	483	483
REAR DROPOUT SPACING	190	190

FRAME	Carbon modular monocoque Fat bike	GRIP	Ultra light hex shaped foam racing grips	CHAIN	KMC X-10
	frame. Tapered 1-1/8 to 1.5 head tube. 12x142mm dropout, direct mount front derailleur	HEAD STEM	Factor 31.8mm 4 bolt stem, Ext: M=90mm, L=100mm,	BRAKES	SRAM DB5 hydraulic disc brakes with lever adjust, 180mm rotors
FORK	Carbon modular monocoque Fat bike fork, tapered 1-1/8-1.5 steerer, 15mm THRU AXLE	CRANKSET	FSA COMET fat bike specific, 10 speed 36 x 22T L: M/L=175mm	WHEELS	Sunringle Alloy disc specific rims with square holes for reduced weight, 32 hole F/V, precision sealed bearing disc hubs
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM GXP 100mm sealed cartridge bottom bracket		and stainless spokes
HEADSET	A-head semi integrated, for tapered 1.8-1.5	PEDALS	Low profile high impact resin	TYRES	26 x 4.8" Snowshoe XL Silica Comp 120 TPI folding bead
HEADSET	head tube, cartridge bearings with 8mm	F. DERAILLEUR	SRAM X-5 2 x 10 high direct mount	SADDLE	Factor MTB sport saddle
	cone spacer	R. DERAILLEUR	SRAM X-9 type 2 x 10 speed mid cage	SEATPOST/	Factor 31.6mm alloy, micro adjust with
HANDLEBAR	Factor butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	SHIFT LEVERS	SRAM X-7 20 speed	CLAMP	twin bolt head, L:400mm
	[vv. /oonin, sweep. 7	CASSETTE	SRAM 10 speed cassette 11 - 36T	EXTRAS	N/A

STOUT 20



KEY FEATURES

Apollo's alloy fat frame tapered head tube, with 12mm thru axle rear

Apollo's formed alloy fat bike fork, with 15mm axle and tapered steer tube.

Veetire 26" x 4.8" Snow Shoe fat tyres.

SRAM NX 1 x 11 speed shifting with FSA COMET 30T crank.

SRAM Level Hydraulic disc brakes 180mm front and 160mm rear.

CODES	S	М	L
Matte Black / Matte Orange / Matte Blue	17150	17151	17152

GEOMETRY	S	М	L
STACK	589	593	616
REACH	394	419	437
STAND OVER HEIGHT	400	427	463
EFFECTIVE TOP TUBE	566	600	625
SEAT TUBE (CENTRE TO TOP)	380	430	483
SEAT ANGLE	73.0°	73.0°	73.0°
HEAD TUBE LENGTH	100	110	130
HEAD ANGLE	69.0°	69.0°	70.0°
WHEEL BASE	1103	1140	1153
CHAIN STAY LENGTH	455	455	455
BB DROP	60	60	60
FORK RAKE	51	51	51
AXLE TO CROWN	483	483	483
REAR DROPOUT SPACING	197	197	197

FRAME	Triple butted 6061 alloy Fat bike frame.	HEAD STEM	Factor 31.8mm 4 bolt stem, Ext: S/	CHAIN	KMC Z-99
	1-1/8 head tube. Replaceable dropout, direct mount front derailleur	CRANKSET	M=75mm, L=90mm, Alloy 2-pc MTB crank 38 x 24T S=170mm,	BRAKES	Promax Solve ST hydraulic disc brakes with reach adjust, 160mm rotors
FORK	Apollo 26" Fatty fork, full cr-mo steel		M/Ĺ=175mm	WHEELS	26" Alloy disc specific rims with square
REAR SHOCK	N/A	BOTTOM BRACKET	100mm sealed cartridge bottom bracket		holes for reduced weight, 32 hole F/V, anodised disc hubs and stainless spokes
		PEDALS	Low profile high impact resin	TYRES	26 x 4.5" Kenda Juggernaut 60 TPI
HEADSET	A-head semi integrated 1-1/8"	F. DERAILLEUR	SRAM X-5 high direct mount	SADDLE	Factor MTB sport saddle
HANDLEBAR	Factor butted alloy flat bar bore: 31.8mm	R. DERAILLEUR	SRAM X-5 x 9 speed long cage	SEATPOST/	Factor 27.2mm alloy, micro adjust with twin bolt head, L:400mm
	W: 700mm, sweep: 9°	SHIFT LEVERS	SRAM X-5	CLAMP	
GRIP	Ultra light hex shaped foam racing grips	CASSETTE	SRAM cassette 11 - 34T	EXTRAS	N/A



Apollo's alloy fat frame, standard QR rear dropout

Custom Hi-Ten extra strong fork for fat bikes, QR style

Kenda 26" x 4.5" fat tyres.

SRAM X5 2 x 9 speed shifting.

Promax ST hydraulic disc brakes front and rear.

CODES	S	M	L
Gloss Green / Gloss Black / Gloss Blue	17153	17154	17155

GEOMETRY	S	М	L
STACK	589	593	616
REACH	394	419	437
STAND OVER HEIGHT	400	427	463
EFFECTIVE TOP TUBE	566	600	625
SEAT TUBE (CENTRE TO TOP)	380	430	483
SEAT ANGLE	73.0°	73.0°	73.0°
HEAD TUBE LENGTH	100	110	130
HEAD ANGLE	69.0°	69.0°	70.0°
WHEEL BASE	1103	1140	1153
CHAIN STAY LENGTH	455	455	455
BB DROP	60	60	60
FORK RAKE	51	51	51
AXLE TO CROWN	483	483	483
REAR DROPOUT SPACING	190	190	190


FRAME		HEAD STEM	Factor 31.8mm 4 bolt stem, Ext: S/	CHAIN	KMC Z-99
	1-1/8 head tube. Replaceable dropout, direct mount front derailleur	CRANKSET	M=75mm, L=90mm, Alloy 2-pc MTB crank 38 x 24T S=170mm,	BRAKES	Promax Solve ST hydraulic disc brakes with reach adjust, 160mm rotors
FORK	1-1/8 steerer	BOTTOM BRACKET	M/L=175mm 100mm sealed cartridge bottom bracket	WHEELS	26" Alloy disc specific rims with square holes for reduced weight, 32 hole F/V, anodised disc hubs and stainless spokes
REAR SHOCK	N/A	PEDALS	 Low profile high impact resin	TYRES	26 x 4.5" Kenda Juggernaut 60 TPI
HEADSET	A-head semi integrated 1-1/8"	F. DERAILLEUR	SRAM X-5 high direct mount	SADDLE	Factor MTB sport saddle
HANDLEBAR	Factor butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	R. DERAILLEUR	SRAM X-5 x 9 speed long cage	SEATPOST/	Factor 27.2mm alloy, micro adjust with twin bolt head, L:400mm
	1	SHIFT LEVERS	SRAM X-5	CLAMP	1
GRIP	Ultra light hex shaped foam racing grips	CASSETTE	SRAM cassette 11 - 34T	EXTRAS	N/A


ROAD DESIGN PHILOSOPHY

Designed to be our most versatile road range ever, our alloy range now features the same endurance geometry as its carbon counterpart; perfect for long tour rides, bunch rides, or quicker commutes.

Ride-all-day comfort comes standard thanks to the clearance for wide tyres that cushion bumps, and more relaxed geometry to reduce fatigue.

TOUR / BUNCH RIDE / COMMUTE FIND YOUR ROAD.

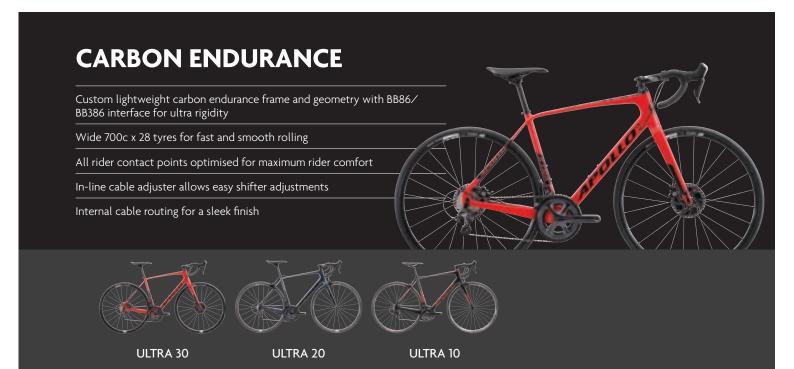

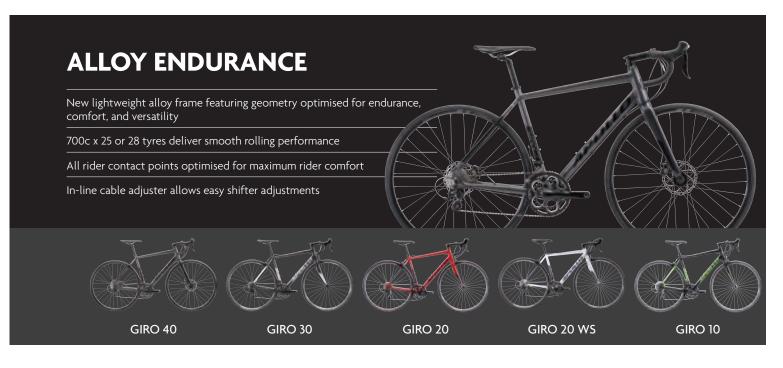

ULTRA 30



KEY FEATURES

Apollo's custom lightweight carbon road frame, with endurance optimised geometry and BB86 \not BB386 BB interface for ultra rigidity

Lightweight oversized full carbon fork with carbon steer tube and 15mm thru axle

Lightweight DT Swiss E1800 Spline disc specific wheelset front and rear

Veetire Roadrunner 700c x 28c 90TPI folding bead fast rolling road tyres

Shimano 22 speed new Ultegra shifting

Shimano new Ultegra 50/34T 2-pc crank

Shimano new Ultegra hydraulic road disc brakes with 160mm rotors front and rear

Prologo Kappa RS road saddle mounted to a carbon seat post

Apollo Endurance road tape with gel insert for maximum rider comfort

In-line cable adjuster for shifter cables for easy shifter adjustments

CODES	S	М	L	XL
Matte Red / Matte Black	18001	18002	18003	18004

GEOMETRY	S	М	L	XL
STACK	549	565	591	636
REACH	373	383	389	396
STAND OVER HEIGHT	415	430	458	495
EFFECTIVE TOP TUBE LENGTH	530	550	570	590
SEAT TUBE (CENTRE TO TOP)	480	500	530	560
SEAT ANGLE	74.0°	73.5°	73.0°	73.0°
HEAD TUBE LENGTH	145	160	185	230
HEAD ANGLE	72.0°	72.5°	73.0°	73.5°
WHEEL BASE	978	990	999	1014
CHAIN STAY LENGTH	410	410	410	410
BB DROP	72	72	72	72
FORK RAKE	45	45	45	45
AXLE TO CROWN	374	374	374	374
REAR DROPOUT SPACING	142	142	142	142

SPECIFICATIONS

Hi-modulus Mitsubishi carbon modular monocoque disc specific road frame. Box technology down tube with BB386 press fit system, slim seatstays, tapered head

tube 1-1/8 to 1-1/2"

FORK Full carbon straight blade disc specific fork with tapered 1-1/8 to 1-1/2" carbon steerer, fully integrated

HEADSET angular cartridge bearings with 15mm

HANDLEBAR

GRIP | Soft PU wrap with gel

A-head integrated 1-1/2 to 1-1/8" sealed cone spacer

FSA Vero Compact 31.8mm alloy W: XS=40cm, S/M=42cm, L/XL=44cm

L/ XL=120mm CRANKSET Shimano Ultegra, 50/34T L: XS/S=170mm, M=172.5mm, L/XL=175mm воттом Press fit BB386 BRACKET PEDALS | Nil **F. DERAILLEUR** | Shimano Ultegra FD-8000 braze on R. DERAILLEUR | Shimano Ultegra RD-R8000 11 speed SHIFT LEVERS Shimano Ultegra BR-R8020 22 speed STI hydraulic road shifters

HEADSTEM

CASSETTE | Shimano 11 speed cassette 11-28T CHAIN KMC 11 speed Shimano BR-R8020 hydraulic road **BRAKES** disc brakes with 160mm rotors WHEELS 700c DT Swiss E 1800 Spline DB 23 **TYRES** Veetire Roadrunner 700 x 28c, 90 TPI, Folding Bead, CC – Continuum Compound **SADDLE** | Prologo Kappa RS **SEATPOST /** Factor 27.2mm 350mm long post, twin **CLAMP** bolt, forged head, alloy seat clamp

FSA Gossamer 1-1/8" 3D forged alloy 4

bolt stem. XS=90mm, S=100mm, M=110mm,

ULTRA 20



KEY FEATURES

Apollo's custom lightweight carbon road frame, with endurance optimised geometry and BB86 \not BB386 BB interface for ultra rigidity

Lightweight oversized full carbon fork with carbon steer tube

Lightweight DT Swiss P1800 Spline wheelset front and rear

Veetire Roadrunner 700c x 28c 90TPI folding bead fast rolling road tyres

Shimano 22 speed new Ultegra shifting

Shimano new Ultegra 50/34T 2-pc crank

Shimano new Ultegra BR-R8000 brake calipers

Prologo Kappa RS road saddle mounted to a carbon seat post

Apollo Endurance road tape with gel insert for maximum rider comfort In-line cable adjuster for shifter cables for easy shifter adjustments

CODES	S	М	L	XL
Matte Slate / Matte Black	18006	18007	18008	18009

S	М	L	XL
549	565	591	636
373	383	389	396
415	430	458	495
530	550	570	590
480	500	530	560
74.0°	73.5°	73.0°	73.0°
145	160	185	230
72.0°	72.5°	73.0°	73.5°
978	990	999	1014
410	410	410	410
72	72	72	72
45	45	45	45
374	374	374	374
130	130	130	130
	549 373 415 530 480 74.0° 145 72.0° 978 410 72 45 374	549 565 373 383 415 430 530 550 480 500 74.0° 73.5° 145 160 72.0° 72.5° 978 990 410 410 72 72 45 45 374 374	549 565 591 373 383 389 415 430 458 530 550 570 480 500 530 74.0° 73.5° 73.0° 145 160 185 72.0° 72.5° 73.0° 978 990 999 410 410 410 72 72 72 45 45 45 374 374 374

SPECIFICATIONS

FRAME Hi-modulus Mitsubishi carbon modular monocoque frame. Box technology down tube with BB386 press fit system,

slim seatstays, tapered head tube 1-1/8 to 1-1/2"

Full carbon straight blade fork with tapered 1-1/8 to 1-1/2" carbon steerer, fully integrated

HEADSET A-head integrated 1-1/2 to 1-1/8" sealed angular cartridge bearings with 15mm

cone spacer

FORK

HANDLEBAR FSA Energy Compact 31.8mm alloy W: XS=40cm, S/M=42cm, L/XL=44cm GRIP | Soft PU wrap with gel

HEADSTEM | FSA Energy 1-1/8" 3D forged alloy 4 bolt stem. XS=90mm, S=100mm, M=110mm, L/ XL=120mm

CRANKSET | Shimano Ultegra, 50/34T L: XS/S=170mm, M=172.5mm, L/XL=175mm

BOTTOM | Press fit BB86

BRACKET | PEDALS | Nil

F. DERAILLEUR | Shimano Ultegra FD-8000 braze on

R. DERAILLEUR | Shimano Ultegra RD-R8000 11 speed

SHIFT LEVERS | Shimano Ultegra ST-R8000 mechanical 22 speed STI shifters |
CASSETTE | Shimano 11 speed cassette 11-28T

CHAIN KMC 11 speed

CHAIN | KIVIC II speed

BRAKES | Shimano BR-R8000 Ultegra

WHEELS | 700c DT Swiss P 1800 Spline clincher wheelset

TYRES Veetire Roadrunner 700 x 28c, 90 TPI, Folding Bead, CC – Continuum Compound

SADDLE | Prologo Kappa RS

SEATPOST / Factor carbon 27.2mm, 300mm post, twin bolt, forged head, alloy seat clamp

ULTRA 10



KEY FEATURES

Apollo's custom lightweight carbon road frame, with endurance optimised geometry and BB86 \prime BB386 BB interface for ultra rigidity

Lightweight oversized full carbon fork with carbon steer tube

Shimano 22 speed 105 shifting

Shimano RS500 34/50T 2-pc crank

Lightweight wheels with alloy hubs with Weinmann rims

Veetire Roadrunner 700c x 28c fast rolling road tyres

Powerful cold forged brake calipers, for excellent braking power and performance

Apollo Endurance road tape with gel insert for maximum rider comfort

Apollo's road endurance specific saddle for extra comfort on those long rides

In-line cable adjuster for shifter cables for easy shifter adjustments

CODES	S	М	L	XL
Matte Nude Carbon / Matte Red	18011	18012	18013	18014

GEOMETRY	S	М	L	XL
STACK	549	565	591	636
REACH	373	383	389	396
STAND OVER HEIGHT	415	430	458	495
EFFECTIVE TOP TUBE LENGTH	530	550	570	590
SEAT TUBE (CENTRE TO TOP)	480	500	530	560
SEAT ANGLE	74.0°	73.5°	73.0°	73.0°
HEAD TUBE LENGTH	145	160	185	230
HEAD ANGLE	72.0°	72.5°	73.0°	73.5°
WHEEL BASE	978	990	999	1014
CHAIN STAY LENGTH	410	410	410	410
BB DROP	72	72	72	72
FORK RAKE	45	45	45	45
AXLE TO CROWN	374	374	374	374
REAR DROPOUT SPACING	130	130	130	130

SPECIFICATIONS

FRAME Hi-modulus Mitsubishi carbon modular monocoque frame. Box technology down tube with BB386 press fit system,

slim seatstays, tapered head tube 1-1/8 to 1-1/2"

FORK | Full carbon straight blade fork with tapered 1-1/8 to 1-1/2" carbon steerer, fully integrated

HEADSET A-head integrated 1-1/2 to 1-1/8" sealed angular cartridge bearings with 15mm cone spacer

HANDLEBAR F

Factor butted alloy anatomic shallow drop 31.8mm alloy W: XS=40cm, S/M=42cm, L/XL=44cm **GRIP** Soft PU wrap with gel

HEADSTEM Factor 1-1/8" 3D forged alloy 4 bolt stem. XS=90mm, S=100mm, M=110mm,

L/ XL=120mm

CRANKSET | Shimano FC-RS500 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm, L/XL=175mm

BOTTOM BRACKET Press fit BB386

PEDALS Nil

F. DERAILLEUR | Shimano 105 braze on **R. DERAILLEUR** | Shimano 105 11 speed

SHIFT LEVERS | Shimano 105 STI 22 speed shifters

CASSETTE | Shimano 11 speed cassette 11-28T

CHAIN | KMC 11 speed

BRAKES Promax dual pivot brake with cartridge

WHEELS 700c Weinmann XM-1 double wall, CNC machined side walls, 32 hole F/V, alloy hubs and stainless spokes.

TYRES Veetire Roadrunner 700c x 28c, MPC - Multiple Purpose Compound

SADDLE | Factor road

SEATPOST / Factor 27.2mm 350mm long post, twin bolt, forged head, alloy seat clamp

GIRO 40



KEY FEATURES

 $700\mathrm{c}$ lightweight butted alloy frame with Apollo's endurance road specific geometry

Lightweight oversized carbon fork with alloy steer tube

Shimano 22 speed 105 shifting

Shimano RS500 34/50T 2-pc crank

Lightweight wheels with alloy hubs with Weinmann rims

Veetire Roadrunner 700c x 28c fast rolling road tyres

Powerful road specific Tektro flat mount disc brakes with 160mm rotors

Apollo Endurance road tape with gel insert for maximum rider comfort

Apollo's road endurance specific saddle for extra comfort on those long rides

In-line cable adjuster for shifter cables for easy shifter adjustments

CODES	S	М	L	XL
Matte Slate / Matte Black	18016	18017	18018	18019

GEOMETRY	S	М	L	XL
STACK	542	558	584	629
REACH	375	385	392	398
STAND OVER HEIGHT	415	430	458	495
EFFECTIVE TOP TUBE LENGTH	530	550	570	590
SEAT TUBE (CENTRE TO TOP)	480	500	530	560
SEAT ANGLE	74.0°	73.5°	73.0°	73.0°
HEAD TUBE LENGTH	145	160	185	230
HEAD ANGLE	72.0°	72.5°	73.0°	73.5°
WHEEL BASE	987	998	1007	1027
CHAIN STAY LENGTH	415	415	415	415
BB DROP	65	65	65	65
FORK RAKE	45	45	45	45
AXLE TO CROWN	374	374	374	374
REAR DROPOUT SPACING	135	135	135	135

FRAME	Superlite butted 6061 alloy, integrated	HEADSTEM	Factor 1-1/8" 3D forged alloy 4 bolt	CASSETTE	Shimano 11 speed cassette 11-28T
	head tube and replaceable derailleur hanger		stem. XS=90mm, S=100mm, M/L=110mm, XL=120mm	CHAIN	KMC 11 speed
FORK	Full carbon straight blade disc specific fork with tapered 1-1/8 to 1-1/2" carbon	CRANKSET	Shimano FC-RS500 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm,	BRAKES	Tektro Lyra mechanical flat mount disc brakes with 160mm rotors
	steerer, fully integrated		L/XL=175mm	WHEELS	700c Weinmann U-26 double wall disc
HEADSET	A-head integrated 1-1/8" cartridge bearings with 15mm cone spacer	BOTTOM BRACKET	Shimano integrated sealed		specific rims, 32 hole 11 speed disc hubs with stainless spokes
HANDLEBAR	Factor butted alloy anatomic shallow drop	PEDALS	Nil	TYRES	Veetire Roadrunner 700c x 28c, MPC - Multiple Purpose Compound
	31.8mm alloy W: XS/S/M=42cm, L/XL=44cm	F. DERAILLEUR	Shimano 105 band clamp	SADDLE	Factor road
GRIP	Soft PU wrap with gel	R. DERAILLEUR	Shimano 105 11 speed	SEATPOST /	Factor alloy 27.2mm post, twin bolt with
GKII	1 Sort To Widp Willi get	SHIFT LEVERS	Shimano 105 STI 22 speed shifters	CLAMP	alloy seat clamp



 $700\mathrm{c}$ lightweight butted alloy frame with Apollo's endurance road specific geometry

Lightweight oversized carbon fork with alloy steer tube

Shimano 22 speed 105 shifting

Shimano RS500 34/50T 2-pc crank

Lightweight wheels with alloy hubs with Weinmann rims

Veetire Roadrunner 700c x 25c fast rolling road tyres

Powerful cold forged brake calipers, for excellent braking power and performance $% \left(1\right) =\left(1\right) \left(1\right)$

Apollo's Endurance road tape with gel insert for maximum rider comfort

Apollo's road endurance specific saddle for extra comfort on those long rides

In-line cable adjuster for shifter cables for easy shifter adjustments

CODES	XS	S	М	L	XL
Matte Black / Gloss White	18020	18021	18022	18023	18024

GEOMETRY	XS	S	М	L	XL
STACK	530	549	565	591	636
REACH	368	373	383	389	396
STAND OVER HEIGHT	396	415	430	458	495
EFFECTIVE TOP TUBE LENGTH	515	530	550	570	590
SEAT TUBE (CENTRE TO TOP)	460	480	500	530	560
SEAT ANGLE	74.5°	74.0°	73.5°	73.0°	73.0°
HEAD TUBE LENGTH	125	145	160	185	230
HEAD ANGLE	72.0°	72.0°	72.5°	73.0°	73.5°
WHEEL BASE	975	984	994	1004	1013
CHAIN STAY LENGTH	410	410	410	410	410
BB DROP	72	72	72	72	72
FORK RAKE	45	45	45	45	45
AXLE TO CROWN	374	374	374	374	374
REAR DROPOUT SPACING	130	130	130	130	130

OF ECIFIC	AIIONS				
FRAME	Superlite butted 6061 alloy, integrated	HEADSTEM	Factor 1-1/8" 3D forged alloy 4 bolt	CASSETTE	Shimano 11 speed cassette 11-28T
	head tube and replaceable derailleur hanger		stem. XS=90mm, S=100mm, M/L=110mm, XL=120mm	CHAIN	KMC 11 speed
FORK	1-1/8" carbon oversized straight blades with alloy steerer, fully integrated	CRANKSET	Shimano FC-RS500 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm,	BRAKES	Promax dual pivot brake with cartridge pads
HEADSET	A-head integrated 1-1/8" cartridge bearings with 15mm cone spacer	BOTTOM BRACKET	L/XL=175mm Shimano integrated sealed	WHEELS	700c Weinmann XM-1 double wall, CNC machined side walls, 32 hole F/V, alloy hubs and stainless spokes.
HANDLEBAR	Factor butted alloy anatomic shallow drop 31.8mm alloy W: XS/S/M=42cm,	PEDALS		TYRES	Veetire Roadrunner 700c x 25c, MPC - Multiple Purpose Compound
	L/XL=44cm	F. DERAILLEUR	Shimano 105 band clamp	SADDLE	Factor road
GRIP	Soft PU wrap with gel	R. DERAILLEUR	Shimano 105 11 speed	SEATPOST /	Factor alloy 27.2mm post, twin bolt with
		SHIFT LEVERS	Shimano 105 STI 22 speed shifters	CLAMP	alloy seat clamp



 $700\mathrm{c}$ lightweight butted alloy frame with Apollo's endurance road specific geometry

Lightweight oversized carbon fork with alloy steer tube

Lightweight wheels with alloy hubs with Weinmann double wall rims $\,$

Veetire Roadrunner 700c x 25c fast rolling road tyres

Shimano Sora 18 speed shifting

FSA Vero Compact 34/50T crank

Powerful Tektro caliper brakes

Apollo Endurance road tape with gel insert for maximum rider comfort

In-line cable adjuster for shifter cables for easy shifter adjustments

CODES	XS	S	М	L	XL	
Matte Red / Matte Black	18025	18026	18027	18028	18029	

GEOMETRY	XS	S	М	L	XL
STACK	530	549	565	591	636
REACH	368	373	383	389	396
STAND OVER HEIGHT	396	415	430	458	495
EFFECTIVE TOP TUBE LENGTH	515	530	550	570	590
SEAT TUBE (CENTRE TO TOP)	460	480	500	530	560
SEAT ANGLE	74.5°	74.0°	73.5°	73.0°	73.0°
HEAD TUBE LENGTH	125	145	160	185	230
HEAD ANGLE	72.0°	72.0°	72.5°	73.0°	73.5°
WHEEL BASE	975	984	994	1004	1013
CHAIN STAY LENGTH	410	410	410	410	410
BB DROP	72	72	72	72	72
FORK RAKE	45	45	45	45	45
AXLE TO CROWN	374	374	374	374	374
REAR DROPOUT SPACING	130	130	130	130	130

FRAME	Superlite butted 6061 alloy, integrated	HEADSTEM	Factor 1-1/8" 3D forged alloy 4 bolt	CASSETTE	Shimano HG-50 9 speed cassette 11-30T
	head tube and replaceable derailleur hanger		stem. XS=90mm, S=100mm, M/L=110mm, XL=120mm	CHAIN	KMC X-9
FORK	1-1/8" carbon oversized straight blades	CRANKSET	FSA Vero compact, 50 x 34T XS=170mm,	BRAKES	Tektro R-312 dual pivot
	with alloy steerer, fully integrated		S/M=172.5mm, L/XL=175mm	WHEELS	700c Weinmann XM-1 double wall, CNC
HEADSET	A-head integrated 1-1/8" cartridge bearings with 15mm cone spacer	BOTTOM BRACKET	Cartridge sealed		machined side walls, 32 hole F/V, alloy hubs and stainless spokes.
HANDLEBAR	Factor butted alloy anatomic shallow drop	PEDALS	Nil	TYRES	Veetire Roadrunner 700c x 25c, MPC - Multiple Purpose Compound
	31.8mm alloy W: XS/S/M=42cm, L/XL=44cm	F. DERAILLEUR	Shimano Sora band clamp	SADDLE	Factor Road
CDID	1 · · · · · · · · · · · · · · · · · · ·	R. DERAILLEUR	Shimano Sora 9 speed	SEATPOST /	Factor 27.2mm alloy post, twin bolt with
GRIP	Soft PU wrap with gel	SHIFT LEVERS	Shimano Sora 18 speed STI shifters	CLAMP	alloy seat clamp

GIRO 20 WS



KEY FEATURES

700c lightweight butted alloy frame with Apollo's endurance Women's specific geometry

Lightweight oversized carbon fork with alloy steer tube

Lightweight wheels with alloy hubs with Weinmann double wall rims

Veetire Roadrunner 700c x 25c fast rolling road tyres

Shimano Sora 18 speed shifting

FSA Vero Compact 34/50T crank

Powerful Tektro caliper brakes

Apollo Endurance road tape with gel insert for maximum rider comfort $% \left(1\right) =\left(1\right) \left(1\right$

In-line cable adjuster for shifter cables for easy shifter adjustments

CODES	XS	S	М
Gloss White / Gloss Navy Blue	18030	18031	18032

GEOMETRY	xs	s	М
STACK	504	524	545
REACH	375	374	376
STAND OVER HEIGHT	391	410	439
EFFECTIVE TOP TUBE LENGTH	510	519	532
SEAT TUBE (CENTRE TO TOP)	460	480	520
SEAT ANGLE	75.0°	74.5°	74.0°
HEAD TUBE LENGTH	110	130	150
HEAD ANGLE	71.0°	71.5°	72.0°
WHEEL BASE	981	982	995
CHAIN STAY LENGTH	415	415	415
BB DROP	70	70	70
FORK RAKE	45	45	45
AXLE TO CROWN	367	367	367
REAR DROPOUT SPACING	130	130	130

FRAME	Women's specific Superlite butted	HEADSTEM	Factor 1-1/8" 3D forged alloy 4 bolt stem.	CHAIN	KMC X-9
	6061 alloy, integrated head tube and replaceable derailleur hanger		XS/S=90mm, M=100mm	BRAKES	Tektro R-312 dual pivot
FORK	1-1/8" carbon oversized straight blades	CRANKSET	FSA Vero compact 50 x 34T, XS/S/M=170mm	WHEELS	700c Weinmann XM-1 double wall, CNC machined side walls. 32 hole F/V.
	with alloy steerer, fully integrated	воттом	Cartridge sealed		alloy hubs and stainless spokes.
HEADSET	A-head integrated 1-1/8" cartridge bearings	BRACKET		TYRES	Veetire Roadrunner 700c x 25c. MPC -
with 15mm cone spacer	with 15mm cone spacer	cone spacer PEDALS	Resin with toe straps		Multiple Purpose Compound
HANDLEBAR	Factor butted alloy female specific alloy	F. DERAILLEUR	Shimano Sora band clamp	SADDLE	Factor female specific road with cutout
	road bar with short reach and shallow drop 31.8. XS=38cm, S/M=40cm	R. DERAILLEUR	Shimano Sora 9 speed	SEATPOST /	Factor 27.2mm alloy post, twin bolt with
GRIP	Soft PU wrap with gel	SHIFT LEVERS	Shimano Sora 18 speed STI shifters	CLAMP	alloy seat clamp
		CASSETTE	Shimano HG-50 9 speed cassette 11-30T		

GIRO 10



KEY	FEATUR	ES

700c lightweight butted alloy frame with Apollo's endurance road specific geometry

Lightweight alloy fork with alloy steer tube

Lightweight wheels with alloy hubs with Weinmann double wall rims

Veetire Roadrunner 700c x 25c fast rolling road tyres

New Shimano Claris 16 speed shifting

Powerful Tektro caliper brakes


Apollo Endurance road tape with gel insert for maximum rider comfort

Addition of an in-line cable adjuster for shifter cables

CODES	XS	S	М	L	XL
Matte Black / Matte Green	18033	18034	18035	18036	18037

GEOMETRY	XS	s	М	L	XL
STACK	530	549	565	591	636
REACH	368	373	383	389	396
STAND OVER HEIGHT	396	415	430	458	495
EFFECTIVE TOP TUBE LENGTH	515	530	550	570	590
SEAT TUBE (CENTRE TO TOP)	460	480	500	530	560
SEAT ANGLE	74.5°	74.0°	73.5°	73.0°	73.0°
HEAD TUBE LENGTH	125	145	160	185	230
HEAD ANGLE	72.0°	72.0°	72.5°	73.0°	73.5°
WHEEL BASE	975	984	994	1004	1013
CHAIN STAY LENGTH	410	410	410	410	410
BB DROP	72	72	72	72	72
FORK RAKE	45	45	45	45	45
AXLE TO CROWN	374	374	374	374	374
REAR DROPOUT SPACING	130	130	130	130	130

FRAME	6061 butted alloy, integrated head tube	HEADSTEM	Factor 3D forged 2 bolt Road 1-1/8" alloy	CASSETTE	Shimano 8 speed cassette 11-30T
	and replaceable derailleur hanger		XS/S=90mm, M/L=110mm, XL=120mm	CHAIN	KMC Z-7
FORK	1-1/8" alloy straight blades fully integrated	CRANKSET	FSA Tempo compact, 50 x 34T XS=170mm, S/M=172.5mm, L/XL=175mm	BRAKES	Tektro R-312 dual pivot
HEADSET	A-head integrated 1-1/8"	BOTTOM BRACKET	Cartridge sealed	WHEELS	700c Weinmann XM-1 double wall, CNC machined side walls, 32 hole F/V, alloy hubs and stainless spokes.
HANDLEBAR	Factor butted alloy anatomic shallow drop	PEDALS	Nil	TYRES	Veetire Roadrunner 700c x 25c, MPC -
	31.8mm alloy W: XS/S/M=42cm,	F. DERAILLEUR	Shimano Claris band clamp		Multiple Purpose Compound
	L/XL=44cm	R. DERAILLEUR	Shimano Claris 8 speed	SADDLE	Factor Road
GRIP	Soft PU wrap	SHIFT LEVERS	Shimano Claris 16 speed STI shifters	SEATPOST / CLAMP	Factor 27.2mm alloy post, twin bolt with alloy seat clamp

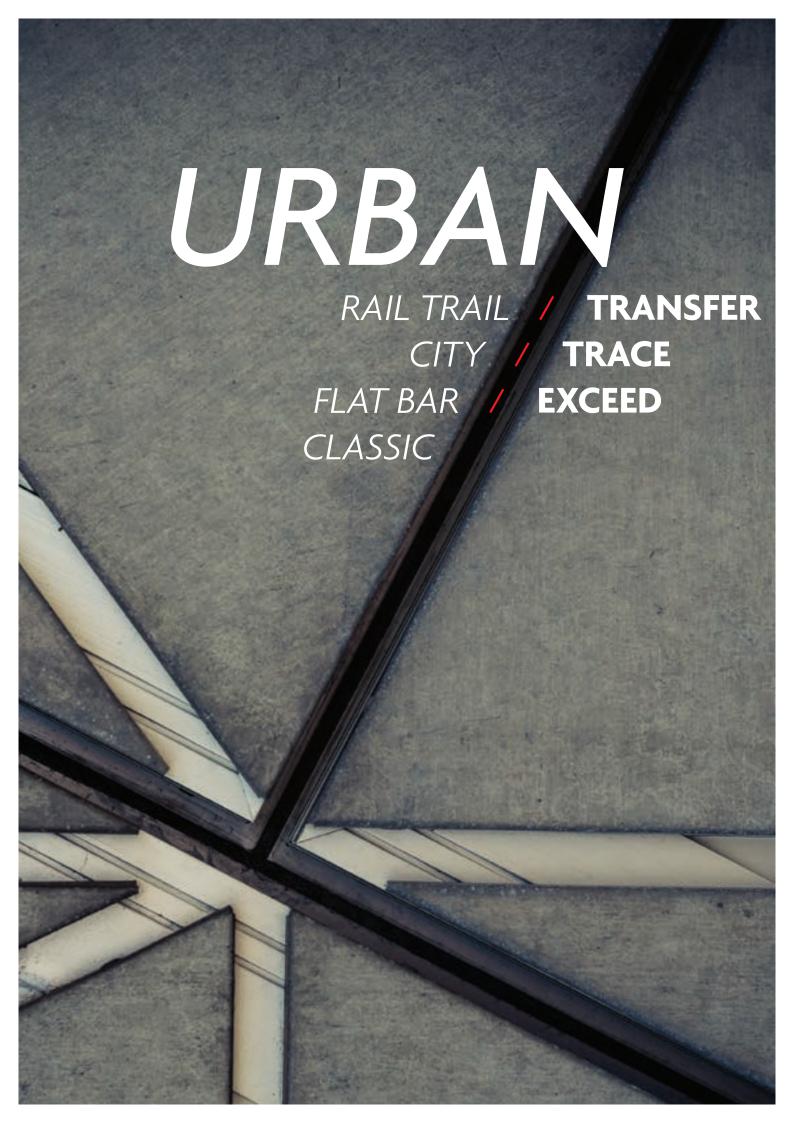

TRANSFER

URBAN **EDGE**

Weekday commuter designed with similar agility and comfort as our Trace series, the Transfer offers a suspension fork and knobby tyres; ideal for going from street to gravel with confidence. Exceptional versatility to tackle any weekend getaway.

SUSPENSION FORK

Confidence and control on rough surfaces.

WIDE TYRES

Multi-terrain 700 x 38, up to 700 x 40, for better grip and control.

DOUBLE WALL RIMS

Greater strength for urban environments.

CARRIER & FENDER **MOUNTS**

Easily customisable to

LIGHT WEIGHT

Light and strong - double

or triple butted frames for easy riding. suit your riding needs.

ΧL

L



CODES

KEY FEATURES 700c alloy frame, with Apollo's performance geometry RST Nova suspension fork with 60mm of travel and mechanical lockout Alloy hubs, with Weinmann double wall rims Veetire Rail 700c x 40c urban multi-terrain tyre 3×9 speed Shimano Acera rapid-fire shifting with 11-32T cassette. Shimano FC-T3010 26/36/48T crank Oversized 31.8mm handlebar and stem Powerful Promax hydraulic disc brakes, with 160mm rotors Apollo custom comfort grip

latte Charcoal / Matte Black / Matte Red	18086	18087	18088
GEOMETRY	М	L	XL
STACK	584	600	615
REACH	402	416	426
STAND OVER HEIGHT	441	473	504
EFFECTIVE TOP TUBE	575	600	620
SEAT TUBE (CENTRE TO TOP)	457	508	560
SEAT ANGLE	73.5°	73.0°	72.5°
HEAD TUBE LENGTH	110	125	140
HEAD ANGLE	71.5°	72.0°	72.0°
WHEEL BASE	1062	1077	1091
CHAIN STAY LENGTH	440	440	440
BB DROP	50	50	50
FORK RAKE	44	44	44
AXLE TO CROWN	470	470	470
REAR DROPOUT SPACING	135	135	135

М

FRAME	Triple butted 6061 frame with smooth	HEADSTEM	Alloy, 31.8mm, S/M=90mm, L/XL=105mm	CHAIN	KMC Z-99
	welding. Integrated head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	Shimano FC-T3010 48 x 36 x 26T L: S/M=170mm, L/XL=175mm	BRAKES	Promax DSK-923 hydraulic disc brakes with reach adjust, 160mm rotors
FORK	RST Nova ML suspension fork, 60mm travel with lockout and preload. alloy crown with alloy lowers	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm	PEDALS	Low profile high impact resin		'
	cone spacer	F DFRAILLFUR	Shimano FD-T3000	TYRES	Veetire Rail, 700 x 40c
	l			SADDLE	Factor Ergotech dual density saddle
HANDLEBAR	Alloy low riser, bore: 31.8mm,	R. DERAILLEUR	Shimano RD-T3000	CEATROCT /	Allow twein healt minus adjust 272mm
	W: 600mm, sweep: 6°	SHIFT LEVERS	Shimano Altus 27 speed Rapid Fire	SEATPOST / CLAMP	Alloy twin bolt micro adjust 27.2mm
GRIP	Kraton ERGO comfort grip	CASSETTE	Shimano 9 speed cassette 11-32T	EXTRAS	N/A

TRANSFER 20

HAND



KEY FEATURES

700c alloy frame, with Apollo's performance Women's specific

RST Neon Suspension fork with 60mm of travel and Mechanical lockout.

Alloy hubs, with Weinmann double wall rims.

700c x 38c urban multi-terrain tyres.

24 speed Shimano EZ-fire shifting.

Oversized 31.8mm handlebar and stem

Women's specific saddle for maximum riding comfort.

Powerful mechanical disc brakes, with 160mm rotors.

Apollo custom comfort grip.

CODES	М	L	XL
Matte Charcoal / Matte Black	18090	18091	18092

М	L	XL
584	600	615
402	416	426
441	473	504
575	600	620
457	508	560
73.5°	73.0°	72.5°
110	125	140
71.5°	72.0°	72.0°
1062	1077	1091
440	440	440
50	50	50
44	44	44
470	470	470
135	135	135
	584 402 441 575 457 73.5° 110 71.5° 1062 440 50 44 470	584 600 402 416 441 473 575 600 457 508 73.5° 73.0° 110 125 71.5° 72.0° 1062 1077 440 440 50 50 44 44 470 470

FRAME	6061 butted alloy frame with integrated	HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm,	CHAIN	KMC Z-7
	head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	XL=105mm Suntour XCE 48 x 38 x 28T L: S/M=170mm,	BRAKES	Promax APD-3.0 mechanical disc brakes with 160mm rotors
FORK	RST Neon ML suspension fork, 60mm travel with lockout and preload. alloy crown with alloy lowers	BOTTOM BRACKET	L/XL=175mm Cartridge bottom bracket	WHEELS	700c Weinmann X-M1 double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer		l Low profile high impact resin	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
IANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm wide, sweep: 6°		Shimano M191 8 speed for 31.8 Shimano RD-TX800 8 speed	SADDLE	Factor Ergotech dual density saddle
GRIP	Kraton ERGO comfort grip		Shimano EF-51 Ez Fire 24 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	N/A



CODES

KEY FEATURES
700c alloy frame, with Apollo's performance Women's specific geometry
RST Neon Suspension fork with 60mm of travel and Mechanical lockout.
Alloy hubs, with Weinmann double wall rims.
700c x 38c urban multi-terrain tyres.
24 speed Shimano EZ-fire shifting.
Oversized 31.8mm handlebar and stem
Women's specific saddle for maximum riding comfort.
Powerful mechanical disc brakes, with 160mm rotors.
Apollo custom comfort grip.

oss Navy Blue / Gloss Silver / Gloss Turquoise	17069	17070	17071
GEOMETRY	xs	s	М
STACK	583	600	615
REACH	367	377	388
EFFECTIVE TOP TUBE	396	418	440
SEAT TUBE (CENTRE TO TOP)	540	555	570
SEAT ANGLE	400	430	460
HEAD TUBE LENGTH	73.5°	73.5°	73.5°
HEAD ANGLE	110	125	140
WHEEL BASE	70.0°	70.5°	71.0°
CHAIN STAY LENGTH	1041	1053	1062
BB DROP	440	440	440
FORK RAKE	55	55	55
AXLE TO CROWN	43	43	45
REAR DROPOUT SPACING	470	470	470
	135	135	135

XS

s

М

FRAME	6061 butted alloy women's specific frame with integrated head tube, pannier mounts	HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm	BRAKES	TEKTRO MD-280 mechanical disc brakes with 160mm rotors
	and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L=170mm	WHEELS	700c Weinmann X-M1 double wall rims.
FORK	RST Neon suspension fork, 60mm travel with lockout and preload. Alloy crown	BOTTOM BRACKET	Cartridge bottom bracket	***************************************	32 hole A/V, alloy quick release disc hubs with stainless spokes
	with alloy lowers	PEDALS	Low profile high impact resin	TYRES	Urban multi terrain, 700 x 38c wire bead
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	F. DERAILLEUR	Shimano M191 8 speed for 31.8	SADDLE	Factor women's specific Ergotech dual
	' -	R. DERAILLEUR	Shimano Acera 8 speed		density saddle
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 580mm, sweep: 6°	SHIFT LEVERS	Shimano EF-51 Ez Fire 24 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
GRIP	Kraton ERGO comfort grip	CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	N/Δ
		CHAIN	KMC 7-7	EXTINO	1071



KEY FEATURES 700c alloy frame, with Apollo's performance geometry Suntour M-3010 suspension fork with 50mm of travel Alloy hubs, with Weinmann double wall rims Kenda 700c x 38c urban multi-terrain tyres 21 speed Shimano EZ-fire shifting Oversized 31.8mm handlebar and stem Selle Royal saddle for maximum riding comfort Powerful Promax V-Brakes Apollo custom comfort grip

CODES	М	L	XL
Matte Charcoal / Matte Black / Matte Lime	18097	18098	18099
Matte Charcoal / Matte Black / Matte White	18101	18102	18103
GEOMETRY	М	L	XL
STACK	584	600	615
REACH	402	416	426
STAND OVER HEIGHT	441	473	504
EFFECTIVE TOP TUBE	575	600	620
SEAT TUBE (CENTRE TO TOP)	457	508	560
SEAT ANGLE	73.5°	73.0°	72.5°
HEAD TUBE LENGTH	110	125	140
HEAD ANGLE	71.5°	72.0°	72.0°
WHEEL BASE	1062	1077	1091
CHAIN STAY LENGTH	440	440	440
BB DROP	50	50	50
FORK RAKE	44	44	44
AXLE TO CROWN	470	470	470
REAR DROPOUT SPACING	135	135	135

FRAME	6061 butted alloy frame, pannier mounts	CRANKSET	Alloy crank with 48 x 38 x 28T L=170mm	BRAKES	Alloy linear pull brakes
FORK	and replaceable derailleur hanger. Suntour M3010 suspension fork, 700c,	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs
	50mm travel, alloy crown and lowers	PEDALS	High impact nylon	ļ	with double seal system. Stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
HANDIEDAD		R. DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Factor Ergotech saddle
HANDLEBAR	Low riser, bore: 31.8mm, W:600mm, sweep: 6°	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST /	Alloy 27.2mm micro adjust
GRIP	Kraton ERGO comfort grip	CASSETTE	Shimano 7 speed 14-28T freewheel	CLAMP	
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	CHAIN	KMC Z-51	EXTRAS	N/A



KEY FEATURES 700c alloy frame, with Apollo's performance Women's specific geometry Suntour M-3010 Suspension fork with 50mm of travel. Alloy hubs, with Weinmann double wall rims. 700c x 38c multi-terrain tyres. 21 speed Shimano EZ-fire shifting. Oversized 31.8mm handlebar and stem. Women's specific saddle for maximum riding comfort. Powerful Promax V-Brakes. Apollo custom comfort grip.

xs	S	М
17080	17081	17082
17083	17084	17085
xs	s	м
583	600	615
367	377	388
396	418	440
540	555	570
400	430	460
73.5°	73.5°	73.5°
110	125	140
70.0°	70.5°	71.0°
1041	1053	1062
440	440	440
55	55	55
43	43	45
470	470	470
135	135	135
	17080 17083 XS 583 367 396 540 400 73.5° 110 70.0° 1041 440 555 43 470	17080 17081 17083 17084 XS S 583 600 367 377 396 418 540 555 400 430 73.5° 73.5° 110 125 70.0° 70.5° 1041 1053 440 440 55 55 43 43 470 470

FRAME	6061 butted alloy women's specific frame,	CRANKSET	Alloy crank with 48 x 38 x 28T L=170mm	BRAKES	Alloy linear pull brakes
	pannier mounts and replaceable derailleur hanger.	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs
FORK	Suntour M3010 suspension fork, 700c, 50mm travel, alloy crown and lowers	PEDALS	High impact nylon		with double seal system. Stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
cone spacer	, and the second	R. DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Factor women's specific Ergotech saddle
HANDLEBAR	Low riser, bore: 31.8mm,	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST /	Alloy 27.2mm micro adjust
	W: 580mm, sweep: 6°	CASSETTE	Shimano 7 speed 14-28T freewheel	CLAMP	
GRIP	Kraton ERGO comfort grip	CHAIN	KMC Z-51	EXTRAS	N/A
HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm				

TRACE

URBAN STREET

A weekday commuter that is more relaxed and comfortable than a flat bar road bike, with increased stopping power, and a rigid fork with slick, wider tyres.

RIGID FORK

Light and responsive handling.

WIDE TYRES

700 x 38, up to 700 x 40, for smooth rolling comfort.

DOUBLE WALL RIMS

Greater strength for urban environments.

CARRIER & FENDER MOUNTS

LIGHT WEIGHT

Light and strong - double





KEY FEATURES

700c lightweight butted alloy frame, with Apollo's performance geometry, and eccentric BB, perfect for commuting

Alloy integrated fork with steel steer tube

Alloy hubs, with Weinmann double wall rims

Veetire Speedster 700c x 40c slick tyres with reflective sidewall

Shimano Alfine Inner-8 shifting

Gates mud port Belt Drive system

Powerful Hayes mechanical disc brakes, with 160mm rotors

Apollo custom comfort grip and oversized handlebar and stem

CODES	М	L	XL
Matte Charcoal / Matte Black / Matte Neon Green	18057	18058	18059

GEOMETRY	М	L	XL
STACK	587	608	627
REACH	401	414	422
STAND OVER HEIGHT	417	457	495
EFFECTIVE TOP TUBE	575	600	620
SEAT TUBE (CENTRE TO TOP)	457	508	560
SEAT ANGLE	73.5°	73.0°	72.5°
HEAD TUBE LENGTH	155	175	195
HEAD ANGLE	71.5°	72.0°	72.0°
WHEEL BASE	1060	1075	1090
CHAIN STAY LENGTH	440	440	440
BB DROP	60	60	60
FORK RAKE	40	40	40
AXLE TO CROWN	416	416	416
REAR DROPOUT SPACING	135	135	135

FRAME	Butted 6061 alloy frame with smooth	CRANKSET	Forged crank with Gates CDC Mudport	CHAIN	Gates CDC Mudport belt
	welding. Belt drive compatible, integrated head tube, pannier mounts and replaceable derailleur hanger.	воттом	46T chainring L: S/M/L/XL =175mm German designed eccentric bottom	BRAKES	Hayes MX Comp mechanical disc brakes with 160mm rotors
FORK	Alloy 700c disc specific commuter fork with rack and fender mounts	BRACKET	BRACKET bracket, width adjustable and tension adjustable design with Shimano integrated sealed cartridge	WHEELS	700c U-26 double wall disc specific rims, 32 hole F/V, alloy disc front hub, Shimano Alfine internal 8 speed rear hub
HEADSET	A-head semi integrated 1-1/8" with 10mm	PEDALS	Low profile high impact resin	TYRES	Veetire Speedster 700 x 40c with
HEADSET	cone spacer	F. DERAILLEUR	Nil	TIKES	reflective side walls
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm,	R. DERAILLEUR	Internal hub gears	SADDLE	Factor Ergotech dual density saddle
	sweep: 6°	SHIFT LEVERS	Shimano Alfine 8 speed Rapidfire with	SEATPOST /	Alloy twin bolt micro adjust 27.2mm
GRIP	Kraton ERGO comfort grip		Alfine internal gear rear hub	CLAMP	,,
HEADSTEM	4 bolt alloy stem, 31.8mm, S=90mm, M/L/XL=105mm	CASSETTE	Gates CDC Mudport 24T sprocket for belt drive	EXTRAS	N/A



KEY FEATURES 700c alloy frame, with Apollo's performance geometry, perfect for commuting Alloy integrated fork with steel steer tube Alloy hubs, with Weinmann double wall rims Veetire Speedster 700c x 40c slick tyres with reflective sidewall 3 x 9 speed Shimano Acera rapid-fire shifting with 11-32T cassette

Shimano FC-T3010 26/36/48T crank

Oversized 31.8mm handlebar and stem

Powerful Promax hydraulic disc brakes, with 160mm rotors

Apollo custom comfort grip and oversized handlebar and stem

CODES	М	L	XL
Matte Charcoal / Matte Black / Matte Red	18061	18062	18063

XL 625
423
498
620
560
72.5°
195
72.0°
1090
440
60
45
416
135

FRAME	Triple butted 6061 frame with smooth welding. Integrated head tube, pannier	CRANKSET	Shimano FC-T3010 48 x 36 x 26T L: S/M=170mm, L/XL=175mm	BRAKES	Promax DSK-923 hydraulic disc brakes with reach adjust, 160mm rotors
FORK	mounts and replaceable derailleur hanger. Alloy 700c disc specific commuter fork	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick
	with rack and fender mounts	PEDALS	Low profile high impact resin		release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	F. DERAILLEUR	Shimano FD-T3000	TYRES	Veetire Speedster 700 x 40c with reflective side walls
	l '	R. DERAILLEUR	Shimano RD-T3000	SADDLE	Factor Ergotech dual density saddle
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm, sweep: 6°	SHIFT LEVERS	Shimano Altus 27 speed Rapid Fire	SEATPOST /	Alloy twin bolt micro adjust 27.2mm
GRIP	Kraton ERGO comfort grip	CASSETTE	Shimano 9 speed cassette 11-32T	CLAMP	
HEADSTEM	4 bolt alloy stem, 31.8mm, S=90mm, M/L/XL=105mm	CHAIN	KMC Z-99	EXTRAS	N/A

XL

18067



CODES

Matte Charcoal / Matte Black

KEY FEATURES
700c alloy frame, with Apollo's performance geometry, perfect for commuting
Hi-ten integrated steel fork
Alloy hubs, with Weinmann double wall rims
Kenda 700c x 38c slick tyres
24 speed Shimano EZ-fire shifting
Oversized 31.8mm handlebar and stem
Powerful Promax mechanical disc brakes, with 160mm rotors
Apollo custom comfort grip

GEOMETRY	s	М	L	XL
STACK	559	585	606	625
REACH	384	402	415	423
STAND OVER HEIGHT	392	431	465	498
EFFECTIVE TOP TUBE	550	575	600	620
SEAT TUBE (CENTRE TO TOP)	400	457	508	560
SEAT ANGLE	73.5°	73.5°	73.0°	72.5°
HEAD TUBE LENGTH	130	155	175	195
HEAD ANGLE	71.0°	71.5°	72.0°	72.0°
WHEEL BASE	1040	1060	1075	1090
CHAIN STAY LENGTH	440	440	440	440
BB DROP	60	60	60	60
FORK RAKE	45	45	45	45
AXLE TO CROWN	416	416	416	416
REAR DROPOUT SPACING	135	135	135	135

s

18064

М

18065

18066

FRAME	6061 butted alloy frame with integrated head tube, pannier mounts and	HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XI =105mm	CHAIN	KMC Z-7
FORK	replaceable derailleur hanger. 700c disc specific hi-ten rigid integrated	CRANKSET	Suntour XCE 48 x 38 x 28T L: S/M=170mm, L/XL=175mm	BRAKES	Promax APD-3.0 mechanical disc brakes with 160mm rotors 700c Weinmann U-26 double wall disc
HEADSET	trekking fork with rack and fender mounts A-head semi integrated 1-1/8" with 10mm	BOTTOM BRACKET	Cartridge bottom bracket		specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
	cone spacer	PEDALS	Low profile high impact resin	TYRES	Kenda Urban sport 700 x 38c wire bead
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm,	F. DERAILLEUR	Shimano M191 8 speed for 31.8	SADDLE	Factor Ergotech dual density saddle
	sweep: 6°	R. DERAILLEUR	Shimano RD-TX800 8 speed	SEATPOST /	Alloy 27.2mm micro adjust
GRIP	Kraton ERGO comfort grip	SHIFT LEVERS	Shimano EF-51 Ez Fire 24 speed	CLAMP	
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	N/A

TRACE 20 WS



KEY FEATURES

700c alloy frame, with Apollo's performance Women's specific geometry, perfect for commuting

Hi-ten integrated steel fork

Alloy hubs, with Weinmann double wall rims

Kenda 700c x 38c slick tyres

24 speed Shimano EZ-fire shifting

Oversized 31.8mm handlebar and stem

Women's specific saddle for maximum riding comfort

Powerful Promax mechanical disc brakes, with 160mm rotors

Apollo custom comfort grip

CODES	XS	S	М
Matte Charcoal / Matte Black / Matte Turquoise	18068	18069	18070
GEOMETRY	XS	S	M

GEOMETRY	XS	S	М
STACK	564	583	593
REACH	373	382	394
STAND OVER HEIGHT	371	395	413
EFFECTIVE TOP TUBE	540	555	570
SEAT TUBE (CENTRE TO TOP)	400	430	460
SEAT ANGLE	73.5°	73.5°	73.5°
HEAD TUBE LENGTH	130	150	160
HEAD ANGLE	71.0°	71.0°	71.0°
WHEEL BASE	1027	1043	1060
CHAIN STAY LENGTH	440	440	440
BB DROP	65	65	65
FORK RAKE	45	45	45
AXLE TO CROWN	416	416	416
REAR DROPOUT SPACING	135	135	135

FRAME	6061 butted alloy women's specific frame with integrated head tube, pannier mounts	CRANKSET	Suntour XCE 48 x 38 x 28T L: XS/S/M=170mm	BRAKES	Promax APD-3.0 mechanical disc brakes with 160mm rotors
FORK	and replaceable derailleur hanger. 700c disc specific hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
	trekking fork with rack and render mounts	PEDALS	Low profile high impact resin		release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm	F. DERAILLEUR	Shimano M191 8 speed for 31.8		Kenda Urban sport 700 x 38c wire bead
HANDIEDAD	cone spacer	R. DERAILLEUR	Shimano RD-TX800 8 speed	SADDLE	Factor women's specific Ergotech dual density saddle
HANDLEBAR	Alloy low riser, bore: 31.8mm, W:580mm, sweep 6°	SHIFT LEVERS	Shimano EF-51 Ez Fire 24 speed	SEATPOST /	Alloy 27.2mm micro adjust
GRIP	Kraton ERGO comfort grip	CASSETTE	Shimano 8 speed cassette 12-32T	CLAMP	
HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm	CHAIN	KMC Z-7	EXTRAS	N/A

TRACE 10



KEY FEATURES
700c alloy frame, with Apollo's performance geometry, perfect for commuting
Hi-ten steel fork
Alloy hubs, with Weinmann double wall rims
Kenda 700c x 38c slick tyres
21 speed Shimano EZ-fire shifting
Oversized 31.8mm handlebar and stem
Selle Royal saddle for maximum riding comfort
Powerful Promax V-Brakes
Apollo custom comfort grip

CODES	S	М	L	XL
Matte Charcoal / Matte Black / Matte Lime	18071	18072	18073	18074
Matte Charcoal / Matte Black / Matte White	18075	18076	18077	18078
GEOMETRY	s	М	L	XL
STACK	559	585	606	625
REACH	384	402	415	423
STAND OVER HEIGHT	392	431	465	498
EFFECTIVE TOP TUBE	550	575	600	620
SEAT TUBE (CENTRE TO TOP)	400	457	508	560
SEAT ANGLE	73.5°	73.5°	73.0°	72.5°
HEAD TUBE LENGTH	130	155	175	195
HEAD ANGLE	71.0°	71.5°	72.0°	72.0°
WHEEL BASE	1040	1060	1075	1090
CHAIN STAY LENGTH	440	440	440	440
BB DROP	60	60	60	60
FORK RAKE	45	45	45	45
AXLE TO CROWN	416	416	416	416
REAR DROPOUT SPACING	135	135	135	135

FRAME	6061 butted alloy frame, pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L: S/M/L/XL=170mm		Alloy linear pull brakes
FORK	700c hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket		700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm	PEDALS	High impact nylon	TYRES	Kenda Urban sport 700 x 38c wire bead
cone spacer	cone spacer	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm	SADDLE	Factor Ergotech saddle
HANDLEBAR	Low riser, bore: 31.8mm, W:600mm,	R. DERAILLEUR	Shimano TY-300 7 speed	SEATPOST /	Alloy 27.2mm micro adjust
	sweep: 6°	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	CLAMP	
GRIP	Kraton ERGO comfort grip	CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	CHAIN	KMC Z-51		

TRACE 10 WS



KEY FEATURES

700c alloy frame, with Apollo's performance Women's specific geometry, perfect for commuting.

Hi-ten steel fork.

Alloy hubs, with Weinmann double wall rims.

Kenda 700c x 38c slick tyres.

21 speed Shimano EZ-fire shifting.

Oversized 31.8mm handlebar and stem.

Women's specific saddle for maximum riding comfort.

Powerful Promax V-Brakes.

Apollo custom comfort grip.

CODES	XS	S	М
Matte Charcoal / Matte Black / Matte Pink	18079	18080	18081
Gloss White / Gloss Silver / Gloss Lavender	18082	18083	18084
GEOMETRY	xs	s	М
STACK	566	585	595
REACH	372	382	394
STAND OVER HEIGHT	372	395	414
EFFECTIVE TOP TUBE	540	555	570
SEAT TUBE (CENTRE TO TOP)	400	430	460
SEAT ANGLE	73.5°	73.5°	73.5°
HEAD TUBE LENGTH	130	150	160
HEAD ANGLE	71.0°	71.0°	71.0°
WHEEL BASE	1027	1043	1060
CHAIN STAY LENGTH	440	440	440
BB DROP	65	65	65
FORK RAKE	40	40	40
AXLE TO CROWN	416	416	416
REAR DROPOUT SPACING	135	135	135

FRAME	6061 butted alloy women's specific frame,	HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm	CHAIN	KMC Z-51
	pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T	BRAKES	Alloy linear pull brakes
FORK	700c hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	L: XS/S/M= 170mm Cartridge bottom bracket	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact nylon	TYRES	Kenda Urban sport 700 x 38c wire bead
	'	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm	SADDLE	Factor women's specific Ergotech saddle
HANDLEBAR	Low riser, bore: 31.8mm, W: 580mm, sweep: 6°	R. DERAILLEUR	Shimano TY-300 7 speed	SEATPOST /	Alloy 27.2mm micro adjust
GRIP	Kraton ERGO comfort grip	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	CLAMP	
,		CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A



URBAN SPEED

The commuter of choice for purists and fitness enthusiasts. Beat the traffic with a featherweight alloy frame with road bike DNA for speed and efficiency, paired with a light carbon or alloy fork for total control.

RIGID FORK

Light and responsive handling.

FAST TYRES

700 x 28 tyres for speed and agility on city roads.

DOUBLE WALL RIMS

Greater strength for urban environments.

CARRIER & FENDER MOUNTS

BUILT FOR SPEED

Combining road bike



EXCEED 30

HAND



KEY FEATURES

700c alloy flat bar road frame with comfort road geometry

Lightweight carbon fork with alloy steer tube

Lightweight wheels with alloy hubs, with Weinmann double wall

Veetire Roadrunner 700c x 28c fast rolling road tyres

 3×9 speed Shimano Acera rapid-fire shifting with 11-32T cassette

Shimano FC-T3010 26/36/48T crank

Oversized 31.8mm handlebar and stem

Powerful Promax mini V-Brakes

Apollo custom comfort grip

CODES	М	L	XL
Gloss Black / Gloss Silver	18039	18040	18041

М	L	XL
574	593	614
415	424	437
439	462	486
585	605	625
500	530	560
73.5°	73.0°	73.0°
150	170	190
72.5°	72.5°	73.0°
1050	1065	1075
430	430	430
70	70	70
50	50	50
397	397	397
130	130	130
	574 415 439 585 500 73.5° 150 72.5° 1050 430 70 50 397	574 593 415 424 439 462 585 605 500 530 73.5° 73.0° 150 170 72.5° 72.5° 1050 1065 430 430 70 70 50 50 397 397

FRAME	Superlite triple butted 6061 aluminium	HEADSTEM	Alloy 4 bolt stem, bore: 31.8mm	CHAIN	KMC Z-99
	frame with integrated head tube, pannier mounts and replaceable forged derailleur		L: S=75mm, M/L=90mm, XL=105mm	BRAKES	Mini alloy linear pull calipers
	hanger	CRANKSET	Shimano FC-T3010 48 x 36 x 26T L: S/M=170mm, L/XL=175mm	WHEELS	700c custom Weinmann X-M1 32 hole
FORK	Carbon UD composite fork with straight blades, alloy steerer/crown 1-1/8"	воттом	Cartridge bottom bracket		double wall A/V rims, alloy hubs and stainless spokes.
	integrated with rack and fender mounts	BRACKET		TYRES	Veetire Roadrunner, 700 x 28c wire bead
HEADSET	A-head semi integrated 1-1/8" with 10mm	PEDALS	Low profile high impact resin	SADDLE	Factor contoured saddle
	cone spacer	F. DERAILLEUR	Shimano FD-T3000	SEATPOST /	Alloy 27.2mm micro adjust
IANDLEBAR	Alloy flat bar, bore: 25.4mm, W: 600mm,	R. DERAILLEUR	Shimano RD-T3000	CLAMP	
CDID	sweep: 5°	SHIFT LEVERS	Shimano EF-65 Ez Fire 27 speed	EXTRAS	N/A
GRIP	Kraton ERGO comfort grip	CASSETTE	Shimano 9 speed cassette 11-32T		



CODES

Gloss Black / Gloss Silver / Gloss Blue

KEY FEATURES 700c alloy flat bar road frame with comfort road geometry Lightweight carbon fork with alloy steer tube Lightweight wheels with alloy hubs, with Weinmann double wall rims Veetire Roadrunner 700c x 28c fast rolling road tyres 24 speed Shimano EZ-fire shifting with cassette Powerful Promax mini V-Brakes Apollo custom comfort grip

GEOMETRY	s	М	L	XL
STACK	553	574	593	614
REACH	397	415	424	437
STAND OVER HEIGHT	406	439	462	486
EFFECTIVE TOP TUBE	555	585	605	625
SEAT TUBE (CENTRE TO TOP)	450	500	530	560
SEAT ANGLE	74.0°	73.5°	73.0°	73.0°
HEAD TUBE LENGTH	130	150	170	190
HEAD ANGLE	72.0°	72.5°	72.5°	73.0°
WHEEL BASE	1030	1050	1065	1075
CHAIN STAY LENGTH	430	430	430	430
BB DROP	70	70	70	70
FORK RAKE	50	50	50	50
AXLE TO CROWN	397	397	397	397
REAR DROPOUT SPACING	130	130	130	130

S

18042

М

18043

L

18044

XL

18045

FRAME	Superlite triple butted 6061 aluminium	HEADSTEM	Alloy 4 bolt stem, bore: 31.8mm	CHAIN	KMC Z-7
	frame with integrated head tube, pannier mounts and replaceable forged derailleur hanger	CRANKSET	L: S=75mm, M/L=90mm, XL=105mm Suntuor XCE 48x 38 x 28T L: S/M=170mm, L/XL=175mm	BRAKES WHEELS	700c custom Weinmann X-M1 32 hole
FORK	Carbon UD composite fork with straight blades, alloy steerer/crown 1-1/8" integrated with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	TVDES	double wall A/V rims, alloy hubs and stainless spokes.
HEADSET	A-head semi integrated 1-1/8" with 10mm	PEDALS	Low profile high impact resin	TYRES SADDLE	Veetire Roadrunner, 700 x 28c wire bead Factor contoured saddle
	cone spacer	F. DERAILLEUR	Shimano M-191 8 speed top swing for 31.8	SEATPOST /	1
HANDLEBAR	Alloy flat bar, bore: 31.8mm, W: 600mm, sweep: 5°	R. DERAILLEUR	Shimano Acera 8 speed	CLAMP	
GRIP	Kraton ERGO comfort grip	SHIFT LEVERS	Shimano EF-510 Ez Fire 24 speed	EXTRAS	N/A
GRIP	Matori ENGO Comiori grip	CASSETTE	Shimano 8 speed cassette 12-32T		

EXCEED 20 WS



KEY FEATURES

700c Women's specific butted alloy flat bar road frame with comfort road geometry.

Lightweight carbon fork with alloy steer tube.

Lightweight wheels with alloy hubs, with Weinmann double wall

24 speed Shimano EZ-fire shifting with cassette

Powerful Promax mini V-Brakes.

Women's specific saddle for maximum riding comfort.

Apollo custom comfort grip.

CODES	XS	S	M
Matte Black / Matte Silver / Matte Pink	17023	17024	17025

GEOMETRY	xs	s	М
STACK	549	560	570
REACH	388	394	401
STAND OVER HEIGHT	361	385	407
EFFECTIVE TOP TUBE	545	555	575
SEAT TUBE (CENTRE TO TOP)	400	440	480
SEAT ANGLE	74.0°	74.0°	73.0°
HEAD TUBE LENGTH	130	140	150
HEAD ANGLE	71.0°	71.5°	71.5°
WHEEL BASE	1030	1035	1042
CHAIN STAY LENGTH	430	430	430
BB DROP	70	70	70
FORK RAKE	50	50	50
AXLE TO CROWN	397	397	397
REAR DROPOUT SPACING	130	130	130

FRAME	Superlite triple butted 6061 women's specific aluminium frame with integrated head tube, pannier mounts and replaceable forged derailleur hanger
FORK	Carbon 12k weave composite fork with straight blades, alloy steerer/crown 1-1/8" integrated with rack and fender mounts
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer
HANDLEBAR	Alloy flat bar, bore: 31.8mm, W: 580mm, sweep: 5°
GRIP	Kraton ERGO comfort grip

	Alloy 4 bolt forged stem, bore: 31.8mm L: XS=75mm, S/M=90mm
	Suntuor XCE 48x 38 x 28T L: XS/S/M=170mm
BOTTOM BRACKET	Cartridge bottom bracket
PEDALS	Low profile high impact resin
. DERAILLEUR	Shimano M-191 8 speed top swing for 3
. DERAILLEUR	Shimano Acera 8 speed
SHIFT LEVERS	Shimano EF-51 Ez Fire 24 speed
CASSETTE	Shimano 8 speed cassette 12-32T

CHAIN	KMC Z-7
	Mini alloy linear pull calipers
WHEELS	700c Custom Weinmann X-M1 32 hole double wall A/V rims, alloy hubs and stainless spokes.
TYRES	700 x 28c wire bead
SADDLE	Factor women's specific Comfortech with cutout
	Alloy 27.2mm micro adjust
EXTRAS	N/A

L

18051

XL

18052



CODES

Gloss Black / Gloss Silver / Gloss Red

KEY FEATURES
700c alloy flat bar road frame with comfort road geometry
Lightweight alloy fork with alloy steer tube
Lightweight wheels with alloy hubs, with Weinmann double wall rims
Kenda 700c x 28c fast rolling road tyres
21 speed Shimano EZ-fire shifting with cassette
Selle Royal saddle for maximum riding comfort
Powerful Promax mini V-Brakes
Apollo custom comfort grip

GEOMETRY	s	М	L	XL
STACK	553	574	593	614
REACH	397	415	424	437
STAND OVER HEIGHT	406	439	462	486
EFFECTIVE TOP TUBE	555	585	605	625
SEAT TUBE (CENTRE TO TOP)	450	500	530	560
SEAT ANGLE	74.0°	73.5°	73.0°	73.0°
HEAD TUBE LENGTH	130	150	170	190
HEAD ANGLE	72.0°	72.5°	72.5°	73.0°
WHEEL BASE	1030	1050	1065	1075
CHAIN STAY LENGTH	430	430	430	430
BB DROP	70	70	70	70
FORK RAKE	50	50	50	50
AXLE TO CROWN	397	397	397	397
REAR DROPOUT SPACING	130	130	130	130

S

18049

М

18050

FRAME	Butted 6061 aluminium frame with	HEADSTEM	Alloy 4 bolt stem, bore: 31.8mm	CHAIN	KMC Z-51
	integrated head tube, pannier mounts and replaceable forged derailleur hanger	CRANKSET	L: S=75mm, M/L=90mm, XL=105mm Alloy crank with 48 x 38 x 28T	BRAKES	Mini alloy linear pull calipers
FORK	Full alloy ovalised straight blades with	CKAINKSET	L: S/M/L/XL=170mm	WHEELS	700c custom Weinmann X-M1 32 hole double wall A/V rims, alloy hubs and
	rack mounts	BOTTOM BRACKET	Cartridge bottom bracket		stainless spokes.
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	I High impact resin	TYRES	1
HANDLEBAR	Alloy flat bar, bore: 31.8mm, W: 580mm,		Shimano TX-800 top pull for 31.8mm	SADDLE SEATPOST /	Factor Ergotech saddle Alloy 27.2mm micro adjust
CDID	sweep: 5°	R. DERAILLEUR	Shimano TY-300 7 speed	CLAMP	Alloy 27.2mm micro adjust
GRIP	Kraton ERGO comfort grip	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	EXTRAS	N/A
		CASSETTE	Shimano 7 speed cassette 12-28T		

EXCEED 10 WS



KEY FEATURES

700c Women's specific butted alloy flat bar road frame with comfort road geometry.

Lightweight alloy fork with alloy steer tube.

Lightweight wheels with alloy hubs, with Weinmann double wall

21 speed Shimano EZ-fire shifting with cassette

Women's specific saddle for maximum riding comfort.

Powerful Promax mini V-Brakes.

Apollo custom comfort grip.

CODES	XS	S	М
Gloss White / Gloss Silver / Gloss Turquoise	17030	17031	17032

xs	S	М
565	576	586
383	390	396
369	394	415
545	555	575
400	440	480
74.0°	74.0°	73.0°
130	140	150
71.0°	71.5°	71.5°
1030	1035	1042
430	430	430
70	70	70
40	40	40
409	409	409
130	130	130
	565 383 369 545 400 74.0° 130 71.0° 1030 430 70 40 409	565 576 383 390 369 394 545 555 400 440 74.0° 74.0° 130 140 71.0° 71.5° 1030 1035 430 430 70 70 40 40 409 409

SPECIFICATIONS

HE

HAND

FRAME		HEADSTEM	Alloy 4 bolt forged stem, bore: 31.8mm	CHAIN	KMC Z-51
	frame with integrated head tube, pannier mounts and replaceable forged derailleur	CRANKSET	L: XS=75mm, S/M=90mm Alloy crank with 48 x 38 x 28T	BRAKES	Mini alloy linear pull calipers
	hanger	CICATARSET	L: XS/S/M=170mm	WHEELS	700c Custom Weinmann X-M1 32 hole double wall A/V rims, alloy hubs and
FORK	Full alloy ovalised straight blades with rack mounts	воттом	Cartridge bottom bracket		stainless spokes.
		BRACKET		TYRES	700 x 28c wire bead
EADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact resin	SADDLE	Factor Ergotech saddle
D. FD. A.D.	'	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm	SEATPOST /	Alloy 27.2mm micro adjust
DLEBAR	Flat bar, bore: 31.8mm, W: 580mm, sweep: 6°	R. DERAILLEUR	Shimano TY-300 7 speed	CLAMP	
GRIP	Kraton ERGO comfort grip	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	EXTRAS	N/A
		CASSETTE	Shimano 7 speed cassette 12-28T		



CODES

KEY FEATURES
700c city / commuting inspired traditional light weight Cro-Mo steel frame
Hi-ten traditional steel fork
Shimano Nexus inner-8 speed shifting.
700c x 40c brown wall tyres.
Alloy hubs with Weinmann double wall rims for extra strength.
A-head alloy stem with riser handlebar.
Powerful V-Brakes.
Alloy colour match mudguards with stainless steel struts.
Rear carrier standard.

Gloss Charcoal / Gloss Cream / Gloss Red	17086	17087	17088	17089
GEOMETRY	S	М	L	XL
STACK	535	556	576	595
REACH	382	410	424	432
EFFECTIVE TOP TUBE	540	575	600	620
SEAT TUBE (CENTRE TO TOP)	500	530	560	590
SEAT ANGLE	73.5°	73.5°	73.0°	72.5°
HEAD TUBE LENGTH	135	155	175	195
HEAD ANGLE	71.0°	71.5°	72.0°	72.0°
WHEEL BASE	1027	1060	1075	1090
CHAIN STAY LENGTH	440	440	440	440
BB DROP	65	65	65	65
FORK RAKE	45	45	45	45
AXLE TO CROWN	380	380	380	380
REAR DROPOUT SPACING	120	120	120	120

М

L

XL

FRAME	Cromoly steel commuter frame with rack	CRANKSET	Cold forged 44T crank with double chain	BRAKES	Alloy linear pull brakes
FORK	and fender mounts 700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	cover L: 170mm Cartridge bottom bracket	WHEELS	700c Double wall rims with machined side walls, 32 hole F/V, Shimano Nexus internal rear hub, alloy front hub and stainless
HEADSET	A-head 1-1/8" threadless with semi	PEDALS	Low profile high impact resin		spokes.
	cartridge bearings	F. DERAILLEUR	N/A	TYRES	700 x 40c 60tpi wire bead with puncture protection
HANDLEBAR	Oversize alloy low riser bar, bore: 31.8mm,	R. DERAILLEUR	N/A	SADDLE	Classic series saddle with brass rivets
	W: 580mm, sweep: 5°	SHIFT LEVERS	Shimano Nexus shift 8 speed	SEATPOST /	Alloy 27.2mm micro adjust
GRIP	Leather look tape grip	CASSETTE	Shimano 20T freewheel	CLAMP	
HEADSTEM	Alloy 4 bolt stem, bore: 31.8mm L: S/M=90mm, L=105mm, XL=120mm	CHAIN	KMC Z-610	EXTRAS	Alloy full length front and rear mudguards, alloy pannier rack

MARK III



KEY FEATURES

700c city / commuting inspired traditional Hi-ten steel frame

Hi-ten traditional steel fork

Shimano Nexus inner-3 speed shifting.

700c x 40c brown wall tyres.

Alloy hubs with Weinmann double wall rims for extra strength.

A-head alloy stem with riser handlebar.

Powerful V-Brakes.

Alloy colour match mudguards with stainless steel struts.

Rear carrier standard

CODES	S	М	L	XL
Gloss Green / Gloss White / Gloss Blue	16211	16212	16213	16214

GEOMETRY	s	М	L	XL
STACK	535	556	576	595
REACH	382	410	424	432
EFFECTIVE TOP TUBE	540	575	600	620
SEAT TUBE (CENTRE TO TOP)	500	530	560	590
SEAT ANGLE	73.5°	73.5°	73.0°	72.5°
HEAD TUBE LENGTH	135	155	175	195
HEAD ANGLE	71.0°	71.5°	72.0°	72.0°
WHEEL BASE	1027	1060	1075	1090
CHAIN STAY LENGTH	440	440	440	440
BB DROP	65	65	65	65
FORK RAKE	45	45	45	45
AXLE TO CROWN	380	380	380	380
REAR DROPOUT SPACING	120	120	120	120
NEAN DINOFOUT SPACING	120	120	120	120

SPECIFICATIONS

FRAME Hi tensile commuter frame with rack and fender mounts

FORK 700c Hi-ten 1-1/8 straight blade fork

with rack and fender mounts

HEADSET A-head threadless 1-1/8"

HANDLEBAR Alloy low riser, bore: 25.4mm, W:

580mm, sweep: 6°

GRIP Leather look tape grip

HEADSTEM Alloy 2 bolt stem, 25.4mm, S/M/=90mm, L/XL=105mm **CRANKSET** Cold forged High polish 38T alloy crank with guard L: 170mm

BOTTOM Cartridge bottom bracket BRACKET

PEDALS High impact dual compound resin

F. DERAILLEUR N/A

R. DERAILLEUR 3 Speed internal hub gears

SHIFT LEVERS Shimano Nexus shift 3 speed

CASSETTE Shimano 18T freewheel

CHAIN KMC Z-610

BRAKES Alloy linear pull brakes

WHEELS Double wall alloy rims. 32 hole A/V, alloy hubs with double seal system. Stainless spokes

TYRES 700 x 40c 60tpi wire bead with

puncture protection

SADDLE Classic series saddle with brass rivets

SEATPOST / Alloy 27.2mm micro adjust CLAMP

EXTRAS Alloy full length front and rear

М

18111



CODES

Purple / Silver / Blue

KEY FEATURES
New 700c low step thru city inspired traditional alloy frame
New Hi-ten traditional steel fork for disc brakes
Shimano Nexus inner 3 speed shifting
700c x 42c brown wall tyres
Alloy front and rear mudguards for protection from the elements
Alloy hubs with Weinmann double wall rims for extra strength
Alloy quill stem with city style wide sweep handlebar
Powerful Promax V-Brakes
Alloy colour match mudguards with stainless steel struts
Alloy rear carrier

GEOMETRY	S	м
STACK	589	589
REACH	350	390
STAND OVER HEIGHT	300	330
EFFECTIVE TOP TUBE	600	640
EAT TUBE (CENTRE TO TOP)	420	470
SEAT ANGLE	67.0°	67.0°
HEAD TUBE LENGTH	170	170
HEAD ANGLE	68.0°	68.0°
WHEEL BASE	1068	1108
CHAIN STAY LENGTH	465	465
BB DROP	70	70
FORK RAKE	45	45
AXLE TO CROWN	410	410
REAR DROPOUT SPACING	120	120

S

18110

FRAME	Alloy 6061 city frame with rack and fender mounts	CRANKSET	Cold forged 44T crank with double chain cover L: 170mm	BRAKES WHEELS	Alloy linear pull brakes 700c double wall alloy rims. 32 hole
FORK	700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WILLES	A/V, alloy hubs with double seal system. Stainless spokes
HEADSET	Threaded 1-1/8"	PEDALS	Low profile high impact resin	TYRES	700 x 40c wire bead
		F. DERAILLEUR	N/A	SADDLE	Classic series saddle with brass rivets
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm,	R. DERAILLEUR	3 speed internal hub gears	SEATPOST /	Alloy 27.2mm micro adjust
	Sweep 43°	SHIFT LEVERS	Shimano Nexus shift 3 speed	CLAMP	l
GRIP	Kraton gel dual density comfort grip	CASSETTE	Shimano 18T freewheel	EXTRAS	Alloy full length front and rear mudguards, alloy pannier rack, alloy front rack
HEADSTEM	Alloy quill stem	CHAIN	KMC Z-610		ransy parimer racis, and y resist racis

MARK II







KEY FEATURES

700c city / commuting inspired traditional Hi-ten steel frame

Hi-ten traditional steel fork for disc brakes

8 speed Shimano rapid-fire shifting.

700c x 40c brown wall tyres.

Alloy hubs with Weinmann double wall rims for extra strength.

A-head alloy stem with riser handlebar.

Powerful Disc brakes with 160m rotors front and rear.

CODES	S	М	L	XL
Gloss Navy Blue / Gloss Cream / Gloss Red	16215	16216	16217	16218

GEOMETRY	S	М	L	XL
STACK	535	556	576	595
REACH	382	410	424	432
EFFECTIVE TOP TUBE	540	575	600	620
SEAT TUBE (CENTRE TO TOP)	500	530	560	590
SEAT ANGLE	73.5°	73.5°	73.0°	72.5°
HEAD TUBE LENGTH	135	155	175	195
HEAD ANGLE	71.0°	71.5°	72.0°	72.0°
WHEEL BASE	1027	1060	1075	1090
CHAIN STAY LENGTH	440	440	440	440
BB DROP	65	65	65	65
FORK RAKE	45	45	45	45
AXLE TO CROWN	380	380	380	380
REAR DROPOUT SPACING	120	120	120	120

FRAME	Hi tensile disc specific commuter frame with rack and fender mounts	CRANKSET	Cold forged 44T crank with double chain cover L: 170mm	BRAKES	Tektro MD-280 mechanical disc brakes with 160mm rotors
FORK	700c Hi-ten disc specific 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES (ALT. COLOUR)	Promax DSK 300 mechanical disc brakes with 160mm rotors
HEADSET	A-head threadless 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	
		F. DERAILLEUR	N/A		quick release disc hubs with stainless spokes
HANDLEBAR	Alloy low riser, bore: 25.4mm, W: 580mm,	R. DERAILLEUR	Shimano Acera 8 speed	TYRES	700 x 40c wire bead
CDID	sweep: 6°	SHIFT LEVERS	Shimano Acera Rapid fire 8 speed	SADDLE	Classic series saddle with brass rivets
GRIP	Leather look tape grip	CASSETTE	Shimano 8 speed cassette 12-32T	SEATPOST /	Alloy 27.2mm micro adjust
HEADSTEM	Alloy 2 bolt stem, 25.4mm, S/M=90mm, L/XL=105mm	CHAIN	KMC Z-7	CLAMP	Alloy 27.2111111111CTO adjust
	•			EXTRAS	N/A

М

18113



CODES

Peach / Navy Blue / Sky Blue

KEY FEATURES New 700c low step thru city inspired traditional Hi-ten steel frame
New Hi-ten traditional steel fork for disc brakes
7 speed Shimano Revoshift
700c x 42c brown wall tyres
Alloy front and rear mudguards for protection from the elements
Alloy hubs with Weinmann double wall rims for extra strength
Alloy quill stem with city style wide sweep handlebar
Powerful Promax v-brakes for reliable stopping power in all conditions

CECLAFTRY	-	
GEOMETRY	S	М
STACK	589	589
REACH	350	390
STAND OVER HEIGHT	300	300
EFFECTIVE TOP TUBE	600	640
SEAT TUBE (CENTRE TO TOP)	420	470
SEAT ANGLE	67.0°	67.0°
HEAD TUBE LENGTH	170	170
HEAD ANGLE	68.0°	68.0°
WHEEL BASE	1068	1108
CHAIN STAY LENGTH	465	465
BB DROP	70	70
FORK RAKE	45	45
AXLE TO CROWN	410	410
REAR DROPOUT SPACING	135	135

s

18112

FRAME	Hi tensile city frame with rack and fender mounts	CRANKSET	Cold forged 44T crank with double chain cover L: 170mm	CHAIN BRAKES	KMC Z-51 Alloy linear pull brakes
FORK	700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c double wall alloy rims. 32 hole A/V, alloy hubs with double seal system.
HEADSET	Threaded 1-1/8"	PEDALS	Low profile high impact resin		Stainless spokes
		F. DERAILLEUR	N/A	TYRES	700 x 40c wire bead
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm,	R. DERAILLEUR	Shimano RD-TY500	SADDLE	Classic series saddle with brass rivets
GRIP	Sweep 43° Kraton gel dual density comfort grip		Shimano Revoshift 7 speed Shimano 7 speed 14-34T freewheel	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
HEADSTEM	Alloy quill stem	CASSETTE	Januario / speed 11 311 free wheet	EXTRAS	Alloy full length front and rear mudguards

MARK I



New 700c City / Commuting inspired traditional Hi-ten steel frame New Hi-ten traditional steel fork 21 speed Shimano EZ-fire shifting. 700c x 40c brown wall tyres. Alloy hubs with Weinmann double wall rims for extra strength. A-head Alloy stem with riser handlebar. Powerful Promax V-Brakes.

CODES	S	М	L	XL
Gloss Orange / Gloss Sky Blue / Gloss Black	17098	17099	17100	17101
Gloss Black / Gloss Sky Blue / Gloss Bronze	16219	16220	16221	16222
GEOMETRY	s	м	L	XL
STACK	535	556	576	595
REACH	382	410	424	432
EFFECTIVE TOP TUBE	540	575	600	620
SEAT TUBE (CENTRE TO TOP)	500	530	560	590
SEAT ANGLE	73.5°	73.5°	73.0°	72.5°
HEAD TUBE LENGTH	135	155	175	195
HEAD ANGLE	71.0°	71.5°	72.0°	72.0°
WHEEL BASE	1027	1060	1075	1090
CHAIN STAY LENGTH	440	440	440	440
BB DROP	65	65	65	65
FORK RAKE	45	45	45	45
AXLE TO CROWN	380	380	380	380
REAR DROPOUT SPACING	120	120	120	120

SPECIFICATIONS

KEY FEATURES

FRAME	Hi tensile commuter frame with rack and	CRANKSET	Alloy crank with 48 x 38 x 28T L=170mm	CHAIN	KMC Z-51
FORK	fender mounts	воттом	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
FORK	700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BRACKET		WHEELS	700c Double wall alloy rims. 32 hole
	 	PEDALS	High impact nylon		A/V, alloy hubs with double seal system. Stainless spokes
HEADSET	A-head threadless 1-1/8"	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm		'
		R. DERAILLEUR	Shimano TY-300 7 speed		700 x 40c wire bead
HANDLEBAR	Low riser, bore: 25.4mm, W:580mm,	R. DERAILLEUR	Shimano TX 35 7 speed	SADDLE	Classic series saddle with brass rivets
	sweep: 6°	(ALT. COLOUR)	Similario (77.33 / Speed	SEATPOST /	Alloy 27.2mm micro adjust
GRIP	Leather look tape grip	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	CLAMP	
HEADSTEM	Alloy 2 bolt stem, 25.4mm, S/M=90mm, L/XL=105mm	CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

М

16224



CODES

Gloss Cream / Gloss Red / Gloss Charcoal

REAR DROPOUT SPACING

KEY FEATURES Classic Hi-ten Steel Low step through frame designed for city use. Easy shifting 7 speed Shimano Nexus Inner-7 hub gears. Powerful Promax V-Brakes. Alloy hubs with Weinmann double wall rims for extra strength. Quilled stem for maximum adjustability. Alloy colour match mudguards with stainless steel struts. Soft Comfortable oversized saddle with coil springs. Wicker like front basket.

GEOMETRY	S	M
STACK	583	601
REACH	408	416
EFFECTIVE TOP TUBE	575	600
SEAT TUBE (CENTRE TO TOP)	420	470
SEAT ANGLE	74.0°	73.0°
HEAD TUBE LENGTH	150	170
HEAD ANGLE	69.0°	69.0°
WHEEL BASE	1101	1114
CHAIN STAY LENGTH	450	450
BB DROP	70	70
FORK RAKE	45	45
AXLE TO CROWN	419	419

130

S

16223

FRAME	Mixtie twin down tube classic styled frame in Hi Ten tubing with rack and fender mounts	CRANKSET	Cold forged high polish classic series crank with double chain cover L: 170mm	BRAKES WHEELS	Double wall rims with machined side
FORK	700c Hi-Ten 1" with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket Low profile high impact resin		walls, 32 hole A/V, Shimano Nexus 7 speed internal rear hub, alloy front hub and stainless spokes.
HEADSET	Threaded 1"	F. DERAILLEUR		TYRES	700 x 38c gum wall
		R. DERAILLEUR	7 Speed internal hub gears	SADDLE	Classic Series female specific comfort saddle
HANDLEBAR	Classic moustache bar, bore: 25.4mm, W: 580mm, sweep: 27°	SHIFT LEVERS	Shimano Nexus shift 7 speed	SEATPOST /	High polish steel 28.6mm
GRIP	Dual density leather look grip	CASSETTE	Shimano 18T freewheel	CLAMP	
HEADSTEM	High polish quill stem	CHAIN	KMC Z-610	EXTRAS	Full length alloy mudguards, front mount wicker style basket, alloy kickstand



CODES

Classic Hi-ten Steel Low step through frame designed for city Easy shifting 8 speed Shimano Claris shifting with cassette Powerful Promax disc brakes with 160mm rotors front and rear. Alloy hubs with Weinmann double wall rims for extra strength. Oversized alloy a-head stem with oversized bar. Alloy colour match mudguards with stainless steel struts.

Soft Comfortable oversized saddle with coil springs.

Gloss Sky Blue / Gloss Red / Gloss Navy Blue	16225	16226
GEOMETRY	S	M
STACK	583	601
REACH	408	416
EFFECTIVE TOP TUBE	575	600
SEAT TUBE (CENTRE TO TOP)	420	470
SEAT ANGLE	74.0°	73.0°
HEAD TUBE LENGTH	150	170
HEAD ANGLE	69.0°	69.0°
WHEEL BASE	1101	1114
CHAIN STAY LENGTH	450	450
BB DROP	70	70
FORK RAKE	45	45
AXLE TO CROWN	419	419
REAR DROPOUT SPACING	135	135

S

М

SPECIFICATIONS

Wicker like front basket.

KEY FEATURES

FRAME	Disc specific mixtie twin down tube classic styled frame in Hi Ten tubing with rack and	CRANKSET	Cold forged high polish classic series crank with double chain cover L: 170mm	BRAKES	Promax DSK 300 mechanical disc brakes with 160mm rotors
FORK	fender mounts 700c Hi-Ten 1" with rack and fender	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	Double wall rims, 32 hole A/V with quick release hubs and stainless steel spokes
	mounts	PEDALS	High impact dual compound resin	TYRES	700 x 38c gum wall
HEADSET	A-head threadless 1"	F. DERAILLEUR	N/A	SADDLE	
		R. DERAILLEUR	Shimano Claris 8 speed		saddle
HANDLEBAR	Classic sweeper bar, Bore: 31.8mm, W: 580mm, sweep:38°, Rise: 38	SHIFT LEVERS	Shimano Claris 8 speed flat bar shifter	SEATPOST / CLAMP	High polish steel 28.6mm
GRIP	Dual density leather look grip	CASSETTE	Shimano 8 speed cassette 12 - 32T	EXTRAS	Full length alloy painted mudguards, front
HEADSTEM	Oversize alloy 2 bolt stem, 31.8mm	CHAIN	KMC Z-7		mount wicker style basket, alloy kickstand

М





CODES

KEY FEATURES
Classic Hi-ten Steel Low step through frame designed for city use.
Easy shifting 8 speed Shimano Claris shifting.
Powerful Promax V-Brakes.
Alloy hubs with Weinmann double wall rims for extra strength.
Quilled stem for maximum adjustability.
Alloy colour match mudguards with stainless steel struts.
Soft Comfortable oversized saddle with coil springs.
Wicker like front basket.

ss Charcoal / Gloss Cream / Gloss Purple	16227	16228
GEOMETRY	s	М
STACK	583	601
REACH	408	416
EFFECTIVE TOP TUBE	575	600
SEAT TUBE (CENTRE TO TOP)	420	470
SEAT ANGLE	74.0°	73.0°
HEAD TUBE LENGTH	150	170
HEAD ANGLE	69.0°	69.0°
WHEEL BASE	1101	1114
CHAIN STAY LENGTH	450	450
BB DROP	70	70
FORK RAKE	45	45
AXLE TO CROWN	419	419
REAR DROPOUT SPACING	130	130

s

FRAME	Mixtie twin down tube classic styled frame in Hi Ten tubing with rack and	CRANKSET	Cold forged high polish classic series crank with double chain cover L: 170mm	BRAKES WHEELS	Dual pivot classic series calipers Double wall rims, 32 hole A/V with
FORK	fender mounts 700c Hi-Ten 1" with rack and fender	BOTTOM BRACKET	Cartridge bottom bracket	***************************************	polished quick release front and nutted rear hubs and stainless steel spokes
	mounts	PEDALS	High impact dual compound resin	TYRES	700 x 38c gum wall
HEADSET	Threaded 1"	F. DERAILLEUR	N/A	SADDLE	Classic Series female specific comfort
		R. DERAILLEUR	Shimano Claris 8 speed		saddle
HANDLEBAR	Classic moustache bar, bore: 25.4mm, W: 580mm, sweep: 27°	SHIFT LEVERS	Shimano Claris 8 speed flat bar shifter	SEATPOST / CLAMP	High polish steel 28.6mm
GRIP	Dual density leather look grip	CASSETTE	Shimano 8 speed cassette 12 - 32T	EXTRAS	Full length alloy painted mudguards, front
HEADSTEM	High polish quill stem	CHAIN	KMC Z-7		mount wicker style basket, alloy kickstand



KEY FEATURES

Classic Hi-ten Steel Low step through frame designed for city use

Easy shifting 3 speed Shimano Nexus Inner-3 shifting.

Alloy hubs with Weinmann double wall rims for extra strength.

Quilled stem for maximum adjustability.

Alloy colour match mudguards with stainless steel struts.

Soft Comfortable oversized saddle with coil springs.

Wicker like front basket.

CODES	S	М
Gloss Cream / Gloss Orange / Gloss Slate	16229	16230
Gloss White / Gloss Green / Gloss Slate	16231	16232
GEOMETRY	S	М
STACK	583	601
REACH	408	416
EFFECTIVE TOP TUBE	575	600
SEAT TUBE (CENTRE TO TOP)	420	470
SEAT ANGLE	74.0°	73.0°
HEAD TUBE LENGTH	150	170
HEAD ANGLE	69.0°	69.0°
WHEEL BASE	1101	1114
CHAIN STAY LENGTH	450	450
BB DROP	70	70
FORK RAKE	45	45
AXLE TO CROWN	419	419
REAR DROPOUT SPACING	120	120

FRAME	Mixtie twin down tube classic styled frame in Hi Ten tubing with rack and	CRANKSET	Cold forged high polish classic series crank with double chain cover L: 170mm	BRAKES	Linear pull front brake. Shimano Nexus roller rear brake.
FORK	fender mounts 700c Hi-Ten 1" with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	Double wall alloy rims. 32 hole A/V, alloy hubs with double seal system. Stainless spokes
HEADSET	Threaded 1"	PEDALS F. DERAILLEUR	High impact dual compound resin N/A		700 x 38c gum wall
HANDLEBAR	Classic moustache bar, bore: 25.4mm,		3 Speed internal hub gears	SADDLE	Classic Series female specific comfort saddle
GRIP	W: 580mm, sweep: 27° Dual density leather look grip		Shimano Nexus shift 3 speed Shimano 18T freewheel	SEATPOST / CLAMP	High polish steel 28.6mm
	High polish quill stem	CHAIN	KMC Z-610	EXTRAS	Full length alloy painted mudguards, front mount wicker style basket, alloy kickstand



KEY FEATURES

Classic design Low step through Alloy frame designed for city use.

Easy shifting 3 speed Shimano Nexus Inner-3 hub gears.

Alloy hubs with Weinmann double wall rims for extra strength.

Quilled stem for maximum adjustability.

Alloy colour match mudguards with stainless steel struts.

Soft Comfortable oversized saddle with coil springs.

Wicker like front basket.

CODES	S	М
Gloss Green	16233	16234
Gloss Light Pink / Gloss Pink	16237	16238
GEOMETRY	s	М
STACK	590	609
REACH	360	378
EFFECTIVE TOP TUBE	575	600
SEAT TUBE (CENTRE TO TOP)	420	470
SEAT ANGLE	70.0°	70.0°
HEAD TUBE LENGTH	160	180
HEAD ANGLE	69.0°	69.0°
WHEEL BASE	1081	1094
CHAIN STAY LENGTH	460	460
BB DROP	70	70
FORK RAKE	45	45
AXLE TO CROWN	417	417
REAR DROPOUT SPACING	120	120

FRAME	Ladies classic style low step through alloy commuter frame with rack and fender	CRANKSET	High polish 38T alloy crank with guard L: 170mm	BRAKES	Linear pull front brake. Shimano Nexus roller rear brake.
FORK	mounts and classic comfort geometry 700c Hi-Ten 1" with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket High impact dual compound resin	WHEELS	Weinmann Zac 19 double wall alloy rims. 32 hole A/V, alloy hubs with double seal system. Stainless spokes
HEADSET	Threaded 1"	F. DERAILLEUR			700 x 38c gum wall
HANDLEBAR	Classic Sweeper bar, Raise: 66mm, bore:		3 Speed internal hub gears	SADDLE	Classic Series female specific comfort saddle
GRIP	25.4mm, W: 610mm, sweep: 43° Dual density leather look grip		Shimano Nexus shift 3 speed Shimano 18T freewheel	SEATPOST / CLAMP	High polish steel 27.2mm
HEADSTEM	. , , , , , , , , , , , , , , , , , , ,	CHAIN	KMC Z-610	EXTRAS	Full length painted mudguards, rear carrier, front mount wicker style basket and alloy kickstand



KEY FEATURES Classic design Low step through Alloy frame designed for city use. Easy shifting 7 speed Shimano Revo-Shift. Powerful Promax V-Brakes. Alloy hubs with Weinmann double wall rims for extra strength. Quilled stem for maximum adjustability. Alloy colour match mudguards with stainless steel struts. Soft Comfortable oversized saddle with coil springs.

CODES	S	М
Gloss Purple / Gloss Blue	16239	16240
Gloss Navy Blue / Gloss Cream	16241	16242
GEOMETRY	s	М
STACK	590	609
REACH	360	378
EFFECTIVE TOP TUBE	575	600
SEAT TUBE (CENTRE TO TOP)	420	470
SEAT ANGLE	70.0°	70.0°
HEAD TUBE LENGTH	160	180
HEAD ANGLE	69.0°	69.0°
WHEEL BASE	1081	1094
CHAIN STAY LENGTH	460	460
BB DROP	70	70
FORK RAKE	45	45
AXLE TO CROWN	417	417
REAR DROPOUT SPACING	135	135

SPECIFICATIONS

Wicker like front basket.

FRAME	Ladies classic style low step through alloy	CRANKSET	High polish classic series crank with double chain cover L: 170mm	BRAKES	Alloy linear pull brakes
FORK	mounts and classic comfort geometry 700c Hi-Ten 1" with rack and fender	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	Weinmann Zac 19 double wall alloy rims. 32 hole A/V, Alloy hubs with double seal system. Stainless spokes
	mounts	PEDALS	High impact dual compound resin	TYRES	700 x 38c gum wall
HEADSET	Threaded 1"	F. DERAILLEUR	N/A	SADDLE	Classic Series female specific comfort
		R. DERAILLEUR	Shimano Tourney 7 speed		saddle
HANDLEBAR	Classic Sweeper bar, Raise: 66mm, bore: 25.4mm, W: 610mm, sweep: 43°	SHIFT LEVERS	Shimano Revoshift 7 speed.	SEATPOST / CLAMP	High polish steel 27.2mm
GRIP	Dual density leather look grip	CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	Full length alloy painted mudguards, front
HEADSTEM	High polish quill stem	CHAIN	KMC Z-51		mount wicker style basket, alloy kickstand

EON SERIES

SHIMANO ST@PS

THE INTELLIGENT, SILENT AND EASY TO USE E-BIKE SYSTEM

For all who love to cycle, get outdoors, and put a premium on healthy living. Commute to work, ride long distances or explore the outdoors. SHIMANO STEPS will give you that extra push. Wherever you're going.



EON COMMUTER

A sleek, sporty look, and geometry designed for fast and efficient commuting, the Eon Commuter makes short work of even the most tiring commutes. Arrive fresh and full of energy.

UPGRADES

- + Updated geometry with new city style handlebar
- + Wider tyres offer smoother rolling comfort
- + Upgraded fork with hydraulic lockout
- + Upgraded 9 speed shifting
- + Upgraded hydraulic brakes

EON COMFORT

Designed for riders who want to get from A to B in style and comfort. With a low stepthrough frame, adjustable stem, and comfort saddle paired with a suspension seatpost, the Eon Comfort provides a smooth ride with minimal fatigue.

UPGRADES

- + New city style handlebar
- + Wider tyres offer smoother rolling comfort
- + Upgraded fork with hydraulic lockout
- + Upgraded 9 speed shifting
- + Upgraded hydraulic brakes

EON COMMUTER



KEY FEATURES

New 700c alloy E-Bike frame, special design for Shimano STEPS pedal assist e-bike system $\,$

Updated performance geometry that has been designed for commuting $\slash\hspace{-0.4em}$ city riding

Shimano Steps power assistant pedalling with downtube mounted battery, which provides power assist up to 25 km/h

RST Volant suspension fork with hydraulic lockout

Veetire Speedster 29 x 2.1" semi slick tyres

Oversized large sweep city handlebar

Lightweight forged alloy a-head stem

9 speed Shimano Alivio shifting with rapid-fire shifters

Shimano BR-T445 hydraulic brakes with 160mm rotors front and rear

CODES

Matte Black / Gloss Black / Gloss Blue

ONE SIZE FITS MOST

18114

GEOMETRY	ONE SIZE FITS MOST
STACK	659
REACH	389
STAND OVER HEIGHT	460
EFFECTIVE TOP TUBE	590
SEAT TUBE (CENTRE TO TOP)	460
SEAT ANGLE	73.0°
HEAD TUBE LENGTH	150
HEAD ANGLE	71.0°
WHEEL BASE	1108
CHAIN STAY LENGTH	480
BB DROP	70
FORK RAKE	44
AXLE TO CROWN	490
REAR DROPOUT SPACING	135

FRAME	6061 alloy commuting geometry frame, designed for Shimano STEPS power assist	CRANKSET	Shimano STEPS, Power Assist E-Bike System	BRAKES	Shimano BR-T445 Hydraulic disc brakes with 160mm rotors
FORK	system RST Volant Hydraulic Lockout, 80mm Travel	BOTTOM BRACKET	Shimano STEPS, Power Assist E-Bike System	WHEELS	700c Weinmann X-M1 double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
	Havet	PEDALS	Low profile high impact resin		'
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	F. DERAILLEUR	N/A	TYRES	
		R. DERAILLEUR	Shimano RD-T4000 9spd	SADDLE	Factor Ergotech dual density saddle
HANDLEBAR	Alloy comfort bars, R: 40mm, W: 610mm, Sweep 43°		Shimano Altus 9 speed Rapid Fire	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
GRIP	Kraton ERGO comfort grip	CASSETTE	Shimano 9 speed cassette 11-32T	EXTRAS	Shimano STEPS Battery mounted on the D/T
HEADSTEM	4 bolt alloy stem, ext=90mm	CHAIN	KMC Z-99	,	



KEY FEATURES

700c alloy E-Bike frame, special design for Shimano STEPS pedal assist e-bike system $\,$

Comfort geometry that has been designed with a super low step through design for riders looking easy entry and exit

Shimano Steps power assistant pedalling with downtube mounted battery, which provides power assist up to 25 km/h

RST Volant suspension fork with hydraulic lockout

Veetire Easystreet 700c x 47c city tyres

Oversized large sweep city handlebar

Lightweight adjustable alloy a-head stem

9 speed Shimano Alivio shifting with rapid-fire shifters

Shimano BR-T445 hydraulic brakes with 160mm rotors front and rear.

co		EC
CU	u	E3

ONE SIZE FITS MOST

Gloss Navy Blue / Gloss Silver

18115

GEOMETRY	ONE SIZE FITS MOST
STACK	615
REACH	372
STAND OVER HEIGHT	293
EFFECTIVE TOP TUBE	560
SEAT TUBE (CENTRE TO TOP)	380
SEAT ANGLE	73.0°
HEAD TUBE LENGTH	150
HEAD ANGLE	71.0°
WHEEL BASE	1077
CHAIN STAY LENGTH	475
BB DROP	70
FORK RAKE	40
AXLE TO CROWN	442
REAR DROPOUT SPACING	135

FRAME	6061 alloy low step through "Comfort	HEADSTEM	Alloy adjustable A-head stem	CHAIN	KMC Z-99
	zone" geometry frame with optimised step through clearance and snake stays, designed for Shimano STEPS power assist	CRANKSET	Shimano STEPS, Power Assist E-Bike System	BRAKES	Shimano BR-T445 Hydraulic disc brakes with 160mm rotors
	system	воттом	Shimano STEPS, Power Assist E-Bike	WHEELS	700c Weinmann X-M1 double wall rims,
FORK	RST Volant Hydraulic Lockout, 80mm	BRACKET	System		32 hole A/V, alloy quick release disc hubs with stainless spokes
	Travel	PEDALS	Low profile high impact resin		'
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	F. DERAILLEUR	N/A	TYRES	Veetire Easy Street, 700 x 47c wire bead
	7 Thead Sellin Integrated, Sellin Sealed 1 1/ 0		1 "	SADDLE	Factor Comfortech women's specific
		R. DEKAILLEUR	Shimano RD-T4000 9spd	SEATPOST /	Alloy suspension post with new improved
HANDLEBAR	Alloy comfort bars, R: 40mm, W: 610mm, Sweep 43°	SHIFT LEVERS	Shimano Altus 9 speed Rapid Fire	CLAMP	elastomer, 27.2mm
	'	CASSETTE	Shimano 9 speed cassette 11-32T	EXTRAS	Chimana CTERC save, marint hattani
GRIP	Kraton gel dual density comfort grip		1	EXTRAS	Shimano STEPS carry mount battery



KEY FEATURES

700c Low step through alloy frame with comfort geometry.

Comfort suspension fork with preload and lockout.

24 speed Shimano EZ-Fire shifting with cassette

Alloy quill adjustable stem for maximum comfort.

Extra large comfort saddle.

Powerful Promax V-Brakes.

Alloy hubs with Weinmann double wall rims for extra strength.

CODES	XS	S	M
Gloss Charcoal / Gloss Pink / Gloss White	17118	17119	17120

GEOMETRY	XS	S	М
STACK	617	631	648
REACH	347	363	374
STAND OVER HEIGHT	218	227	235
EFFECTIVE TOP TUBE	560	580	610
SEAT TUBE (CENTRE TO TOP)	355	406	457
SEAT ANGLE	71.0°	71.0°	70.0°
HEAD TUBE LENGTH	140	155	170
HEAD ANGLE	69.5°	69.5°	70.0°
WHEEL BASE	1050	1070	1079
CHAIN STAY LENGTH	460	460	460
BB DROP	70	70	70
FORK RAKE	38	38	38
AXLE TO CROWN	460	460	460
REAR DROPOUT SPACING	135	135	135

FRAME	6061 butted alloy women's step through	HEADSTEM	Alloy adjustable quill stem	CHAIN	KMC Z-7
	"Comfort zone" geometry frame with optimised step through clearance and	CRANKSET	Alloy crank with 48 x 38 x 28T L: 170mm	BRAKES	Alloy linear pull brakes
	snake stays	воттом	Cartridge bottom bracket	WHEELS	700c Weinmann X-M1 double wall alloy
FORK	Apollo suspension fork with 30mm travel	BRACKET			rims. 32 hole A/V, alloy quick release front and nutted rear hubs. Stainless spokes
	with preload and lockout. alloy crown	PEDALS	TPR two tone non-slip		and nucled rear nubs. Stainless spokes
	and lowers.	E DEDAILLELID	Shimano TX-51 top pull for 31.8mm	TYRES	Kenda 700 x 38c wire bead
HEADSET	Threaded semi-sealed 1-1/8"			SADDLE	Factor Comfortech women's specific
		R. DERAILLEUR	Shimano RD-TX800		' '
HANDLEBAR	Alloy comfort bars, R: 66mm, W: 610mm,	SHIFT LEVERS	Shimano EF-510 Ez Fire 24 speed	SEATPOST / CLAMP	Alloy suspension post with new improved elastomer, 27.2mm
	Sweep 43°	CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	Alloy kickstand
GRIP	Kraton gel dual density comfort grip				····-/ ···

INCLINE



KEY FEATURES
700c alloy frame with comfort geometry.
Comfort suspension fork with preload.
21 speed Shimano EZ-Fire shifting.
Alloy quill adjustable stem for maximum comfort.
Extra large comfort saddle.
Powerful Promax V-Brakes.
Alloy hubs with Weinmann double wall rims for extra strength.

CODES	S	M	L	XL
Gloss Silver / Gloss Green / Gloss Black	17121	17122	17123	17124
Gloss Brass / Gloss Blue	17125	17126	17127	17128
GEOMETRY	s	М	L	XL
STACK	615	624	634	648
REACH	368	385	389	404
STAND OVER HEIGHT	417	432	462	497
EFFECTIVE TOP TUBE	580	600	620	640
SEAT TUBE (CENTRE TO TOP)	420	460	500	560
SEAT ANGLE	71.0°	71.0°	70.0°	70.0°
HEAD TUBE LENGTH	140	150	160	170
HEAD ANGLE	69.5°	69.5°	69.5°	70.5°
WHEEL BASE	1073	1093	1100	1109
CHAIN STAY LENGTH	460	460	460	460
BB DROP	70	70	70	70
FORK RAKE	43	43	43	43
AXLE TO CROWN	460	460	460	460
REAR DROPOUT SPACING	135	135	135	135

FRAME	6061 butted alloy "Comfort zone" geometry frame with snake stays	CRANKSET	Alloy crank with 48 x 38 x 28T L: 170mm	BRAKES	Alloy linear pull brakes
FORK	Apollo suspension fork with 30mm travel	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, Alloy quick release
	with preload, alloy crown and legs	PEDALS	Comfort non-slip with rubber insert		front and nutted rear hubs. Stainless spokes
HEADSET	Threaded semi-sealed 1-1/8"	F. DERAILLEUR	Shimano TX-51 top pull for 31.8mm	TYRES	700 x 38c wire bead
HANDLEBAR	 Alloy comfort bars, R: 40mm, W: 600mm,	R. DERAILLEUR	Shimano Altus 7 speed	SADDLE	Factor Comfortech
HANDLEDAK	Sweep 10°	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST /	Alloy suspension post with new improved
GRIP	Kraton gel dual density comfort grip	CASSETTE	Shimano HG20 7 speed cassette 12-28T	CLAMP	elastomer, 27.2mm
HEADSTEM	Alloy adjustable quill stem	CHAIN	KMC Z-51	EXTRAS	Alloy kickstand



700c Low step through alloy frame with comfort geometry.

Comfort suspension fork with preload.

21 speed Shimano EZ-Fire shifting.

Alloy quill adjustable stem for maximum comfort.

Extra large comfort saddle.

Powerful Promax V-Brakes.

Alloy hubs with Weinmann double wall rims for extra strength.

CODES	XS	S	М
Gloss Pearl White / Gloss Purple	17129	17130	17131
Gloss Slate / Gloss Blue	17132	17133	17134
GEOMETRY	xs	s	м
STACK	617	631	648
REACH	347	363	374
STAND OVER HEIGHT	218	227	235
EFFECTIVE TOP TUBE	560	580	610
SEAT TUBE (CENTRE TO TOP)	355	406	457
SEAT ANGLE	71.0°	71.0°	70.0°
HEAD TUBE LENGTH	140	155	170
HEAD ANGLE	69.5°	69.5°	70.0°
WHEEL BASE	1050	1070	1079
CHAIN STAY LENGTH	460	460	460
BB DROP	70	70	70
FORK RAKE	38	38	38
AXLE TO CROWN	460	460	460
REAR DROPOUT SPACING	135	135	135

FRAME	6061 butted alloy women's step through	HEADSTEM	Alloy adjustable quill stem	CHAIN	KMC Z-51
	"Comfort zone" geometry frame with optimised step through clearance and	CRANKSET	Alloy crank with 48 x 38 x 28T L: 170mm	BRAKES	Alloy linear pull brakes
FORK	snake stays Apollo suspension fork with 30mm travel	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, Alloy quick release
	with preload, alloy crown and legs	PEDALS	Comfort non-slip with rubber insert		front and nutted rear hubs. Stainless spokes
HEADSET	Threaded semi-sealed 1-1/8"	F. DERAILLEUR	Shimano TX-51 top pull for 31.8mm	TYRES	700 x 38c wire bead
		R. DERAILLEUR	Shimano Altus 7 speed	SADDLE	Factor Comfortech women's specific
HANDLEBAR	Alloy comfort bars, R: 40mm, W: 600mm, Sweep 10°	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST /	Alloy suspension post with new improved
GRIP	Kraton gel dual density comfort grip	CASSETTE	Shimano HG20 7 speed cassette 12-28T	CLAMP	elastomer, 27.2mm
GKII	Kratori get duat density comfort grip			EXTRAS	Alloy kickstand

VILLA WS



KEY FEATURES
700c Low step through alloy frame with comfort geometry.
Hi-ten steel fork.
7 speed Shimano Revo-Shift.
Alloy quill adjustable stem for maximum comfort.
Extra large comfort saddle.
Powerful Promax V-Brakes.
Alloy hubs with Weinmann double wall rims for extra strength.
Upgraded sealed bearing cartridge BB.

CODES	XS	S	М
Gloss Pearl White / Gloss Turquoise	17135	17136	17137
Gloss Navy Blue / Gloss Silver	17138	17139	17140
GEOMETRY	xs	s	М
STACK	617	631	648
REACH	347	363	374
STAND OVER HEIGHT	218	227	235
EFFECTIVE TOP TUBE	560	580	610
SEAT TUBE (CENTRE TO TOP)	355	406	457
SEAT ANGLE	71.0°	71.0°	70.0°
HEAD TUBE LENGTH	140	155	170
HEAD ANGLE	69.5°	69.5°	70.0°
WHEEL BASE	1050	1070	1079
CHAIN STAY LENGTH	460	460	460
BB DROP	70	70	70
FORK RAKE	38	38	38
AXLE TO CROWN	460	460	460
REAR DROPOUT SPACING	135	135	135

FRAME	6061 butted alloy women's step through	HEADSTEM	Alloy adjustable quill stem	CHAIN	KMC Z-51
	"Comfort zone" geometry frame with optimised step through clearance and	CRANKSET	Alloy crank with 44T single chainwheel	BRAKES	Alloy linear pull brakes
	snake stays		with double chain guide L: 170mm	WHEELS	700c Weinmann X-M1 double wall alloy
FORK	700c rigid hi-tensile steel	BOTTOM BRACKET	Cartridge bottom bracket		rims. 32 hole A/V, Alloy quick release front and nutted rear hubs. Stainless
		PEDALS	Comfort non-slip with rubber insert		spokes
HEADSET	Threaded semi-sealed 1-1/8"	F. DERAILLEUR	'	TYRES	700 x 38c wire bead
				SADDLE	Factor Comfortech women's specific
HANDLEBAR	Alloy comfort bars, R: 40mm, W: 580mm,	R. DERAILLEUR	Shimano Tourney 7 speed		'
	Sweep 10°	SHIFT LEVERS	Shimano Revoshift 7 speed.	SEATPOST / CLAMP	Alloy 27.2mm micro adjust with alloy clamp
GRIP	Kraton comfort grip	CASSETTE	Shimano 7 speed 14-34T freewheel	EXTRAS	Alloy kickstand



26" alloy beach cruiser frame, with Apollo cruising geometry

Alloy hubs with Alex Zuma beach cruiser rim.

26" x 2.35 Whitewall tyres

Shimano Nexus Inner-3 Shifting with rear coaster brake.

Powerful Promax V-Brakes on the front.

Steel mudguard custom painted to match with stainless struts

Steel chain guard custom painted to match

Large comfortable cruisers saddle, with leather like grip.

CODES

ONE SIZE FITS MOST

Gloss Navy Blue / Gloss Pink

16276

GEOMETRY	ONE SIZE FITS MOST
STACK	521
REACH	420
EFFECTIVE TOP TUBE	620
SEAT TUBE (CENTRE TO TOP)	444
SEAT ANGLE	69.0°
HEAD TUBE LENGTH	150
HEAD ANGLE	68.0°
WHEEL BASE	1139
CHAIN STAY LENGTH	486
BB DROP	58
FORK RAKE	45
AXLE TO CROWN	370
REAR DROPOUT SPACING	120

FRAME FORK	Ladies alloy cruiser Hi-Ten 1" with rack and fender mounts	CRANKSET	High polish 44T alloy crank with full length chain guard L: 165mm	BRAKES	Linear pull front brake. Shimano Nexus rear coaster foot brake.
HEADSET	Threaded 1-1/8"	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	36 hole alloy cruiser rims. Alloy hubs with double seal system and nutted axles.
HEADSET	Inreaded I-I/8		Resin cruiser pedals	TYRES	Stainless spokes 26 x 2.35" white wall balloon tyre
HANDLEBAR	Cruiser bar W: 640mm, R: 75mm, sweep:	F. DERAILLEUR R. DERAILLEUR	1	SADDLE	,
GRIP	Dual density leather look grip		Shimano Nexus shift 3 speed	SEATPOST / CLAMP	Alloy 27.2mm
HEADSTEM	High polish quill stem	CASSETTE	Shimano 18T freewheel	EXTRAS	Full length chain and full length painted
		CHAIN	KMC Z-610		mudguards and alloy kickstand



26" alloy beach cruiser frame, with Apollo cruising geometry

Alloy hubs with Alex Zuma beach cruiser rim.

26" x 2.35 Whitewall tyres

7-speed Shimano EZ-fire shifting.

Steel mudguard custom painted to match with stainless struts $% \left(1\right) =\left(1\right) \left(1\right)$

Steel chain guard custom painted to match

Large comfortable cruisers saddle, with leather like grip.

Powerful Promax V-Brakes.

CODES	ONE SIZE FITS MOST
Gloss Ice Blue / Gloss Blue	16277

GEOMETRY	ONE SIZE FITS MOST
STACK	521
REACH	420
EFFECTIVE TOP TUBE	620
SEAT TUBE (CENTRE TO TOP)	444
SEAT ANGLE	69.0°
HEAD TUBE LENGTH	150
HEAD ANGLE	68.0°
WHEEL BASE	1139
CHAIN STAY LENGTH	486
BB DROP	58
FORK RAKE	45
AXLE TO CROWN	370
REAR DROPOUT SPACING	135

FRAME	Ladies alloy cruiser	CRANKSET	High polish 44T alloy crank with full	BRAKES	Alloy linear pull brakes
FORK	Hi-Ten 1" with rack and fender mounts	BOTTOM BRACKET	length chain guard L: 165mm Cartridge bottom bracket	WHEELS	36 hole alloy cruiser rims. Alloy hubs with double seal system and nutted axles. Stainless spokes
HEADSET	Threaded 1-1/8"	PEDALS	Resin cruiser pedals	TYRES	26 x 2.35" white wall balloon tyre
HANDLEBAR	Cruiser bar W: 640mm, R: 75mm, sweep:	F. DERAILLEUR	N/A	SADDLE	Cruiser saddle with spring rail
	50°	R. DERAILLEUR	Shimano TX35 7 speed	SEATPOST /	Alloy 27.2mm
GRIP	Dual density leather look grip	SHIFT LEVERS	Shimano Revoshift 7 speed.	CLAMP	
HEADSTEM	High polish quill stem	CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	Full length chain and full length painted mudguards and alloy kickstand
		CHAIN	KMC 7-51		

TIKI 7 MEN'S



KEY FEATURES

26" alloy beach cruiser frame, with Apollo cruising geometry

Alloy hubs with Alex Zuma beach cruiser rim.

26" x 2.35 Whitewall tyres

7-speed Shimano EZ-fire shifting.

Steel mudguard custom painted to match with stainless struts

Steel chain guard custom painted to match

Large comfortable cruisers saddle, with leather like grip.

Powerful Promax V-Brakes.

CODES	ONE SIZE FITS MOST
Matte Black / Matte Red	16278

GEOMETRY	ONE SIZE FITS MOST
STACK	539
REACH	433
EFFECTIVE TOP TUBE	640
SEAT TUBE (CENTRE TO TOP)	510
SEAT ANGLE	69.0°
HEAD TUBE LENGTH	170
HEAD ANGLE	68.0°
WHEEL BASE	1147
CHAIN STAY LENGTH	486
BB DROP	58
FORK RAKE	45
AXLE TO CROWN	370
REAR DROPOUT SPACING	135

FRAME FORK	Men's alloy cruiser Hi-Ten 1" with rack and fender mounts	CRANKSET	High polish 44T alloy crank with full length chain guard L: 165mm	BRAKES WHEELS	Alloy linear pull brakes 36 hole alloy cruiser rims. Alloy hubs
HEADSET	Threaded 1-1/8"	BOTTOM BRACKET	Cartridge bottom bracket	WILLES	with double seal system and nutted axles. Stainless spokes
HEADSET	Inreaded I-1/8	PEDALS	Resin cruiser pedals	TYRES	26 x 2.35" white wall balloon tyre
HANDLEBAR	Cruiser bar W: 640mm, R: 75mm, sweep:	F. DERAILLEUR	N/A	SADDLE	Cruiser saddle with spring rail
IMINDEEDAN	50°	R. DERAILLEUR	Shimano Tourney 7 speed	SEATPOST /	Alloy 27.2mm
GRIP	Dual density leather look grip	SHIFT LEVERS	Shimano Revoshift 7 speed.	CLAMP	
HEADSTEM	High polish quill stem	CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	Full length chain and full length painted mudguards and alloy kickstand
		CHAIN	KMC Z-51	,	1 - 0



7005 alloy tandem frame, designed to strong and comfortable for the riders $% \left(1\right) =\left(1\right) \left(1\right)$

Heavy Duty cro-mo steel fork for extra strength.

Super powerful Hayes MX Comp mechanical disc brakes, with 180mm rotors from and rear $\,$

27 speed Shimano EZ-Fire shifting with cassette

Oversized alloy handlebars and stems.

Alloy hubs and Weinmann double wall rims with eyelets for extra strength. $\,$

CODES

Gloss White / Gloss Slate / Gloss Lime

ONE SIZE FITS MOST
16273

FRONT	REAR
580	615
496	400
71.5°	72.0°
140	-
71.0°	71.5°
	1677
-	450
70	70
45	-
375	
135	135
	580 496 71.5° 140 71.0° - 70 45 375

FRAME	Double diamond design tandem frame with eccentric bottom bracket	HEADSTEM	Front: Alloy 31.8mm A-head stem L=100mm. Rear: Adjustable length 31.8mm	CASSETTE	Shimano HG20 9 speed cassette 11-32T
FORK	Oversized 700c 1-1/8 full Cro-mo rigid straight blade fork, disc brake mounts		alloy stem R: 35mm, 155mm-200mm adjustment	CHAIN BRAKES	KMC Z-99 Hayes MX comp mechanical disc brakes
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	CRANKSET	(timing cranks) 3/32x39T 170mm alloy crank, (rear) alloy 44/32/22T	WHEELS	with 180mm rotors Weinmann XM25 alloy double wall disc
HANDLEBAR	Front: Alloy low rise bar, W: 600mm, Bore:	BOTTOM BRACKET	Front: Eccentric bottom bracket, Rear:sealed cartridge		F/V rims with eyelets, 36 hole, anodised disc hubs and stainless spokes
	31.8mm, Sweep: 6°. Rear: Alloy flat bar, W: 600mm, Bore: 31.8mm	PEDALS	Low profile high impact resin	TYRES	
GRIP	Kraton gel dual density grip	F. DERAILLEUR	Shimano M370 Altus 9 speed, top pull	SADDLE	,
	, , , , , ,	R. DERAILLEUR	for 31.8mm Shimano Alivio 9 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust twin bolt post with alloy clamp
		SHIFT LEVERS	Shimano Altus Ez Fire 27 speed	EXTRAS	N/A

ASPIRE 24



KEY FEATURES

New Apollo youth specific geometry MTB frame with lower stand over height and hydraulic disc brakes

Durable and light Suntour XCT 24 fork with hydraulic lockout suspension fork

Oversized 31.8mm alloy A-head stem

Oversized 31.8mm handlebar

 $2\,x\,9$ speed, Shimano Acera \diagup Alivio shifting with cassette freewheel and Suntour XCM crank

Promax hydraulic disc brakes with 160mm rotors front and rear provide maximum braking efficiency

Kids specific Selle Royal saddle for maximum riding comfort

Lightweight alloy disc specific rims

 $24\ensuremath{^{\circ}}\xspace$ X 2.25 $\ensuremath{^{\circ}}\xspace$ Veetire Crown Gem 27 TPI MTB tyres for greater control in the dirt

CODES

Matte Black / Matte Charcoal / 18199

GEOMETRY	
STACK	514
REACH	369
STAND OVER HEIGHT	362
EFFECTIVE TOP TUBE	526
SEAT TUBE (CENTRE TO TOP)	318
SEAT ANGLE	73.0°
HEAD TUBE LENGTH	110
HEAD ANGLE	70.0°
WHEEL BASE	995
CHAIN STAY LENGTH	410
BB DROP	30
FORK RAKE	38
AXLE TO CROWN	421
REAR DROPOUT SPACING	135

FRAME		HEADSTEM	A-head MTB stem with Rise: 6° Bore:	CHAIN	KMC Z-99
	MTB frame. 50mm bi-oval top and down tubes, snake stays	CRANKSET	25.4mm, L: 75mm. Suntour XCM-D36-22PBSQ alloy 36 x 22T	BRAKES	Promax DSK-926 hydraulic disc brakes with short reach adjust, 160mm rotors
FORK	Suntour XCT-JR-L-HLO-DS-24, alloy crown and lowers, coil sprung, hydraulic lockout, 80mm travel	BOTTOM BRACKET	L: 170mm Cartridge bottom bracket	WHEELS	24" Weinmann X-M1 alloy 32 hole disc specific rims. Alloy quick release hubs with cassette rear, stainless spokes
HEADSET	Semi-sealed 1-1/8" Integrated A-head		Low profile high impact nylon	TYRES	Veetire Crown Gem 24 x 2.25"
LIANDI ERAD	Riser bar. W: 640mm	F. DERAILLEUR	Shimano FD-T3000	SADDLE	Selle Royal kids specific
	! !	R. DERAILLEUR	RD-M4000 Alivio	SEATPOST /	Alloy micro adjust 27.2mm, with alloy
Oldi	I Maron 81195	SHIFT LEVERS	Shimano Acera SL-M3000		QR clamp
		CASSETTE	Shimano 9 speed cassette 11-34T	EXTRAS	N/A

PANTHER



KEY FEATURES
Kids specific geometry with lower stand over height
Front suspension for maximum riding comfort
Alloy A-head stem, with threadless steer tube
21 speed, Shimano EZ-fire shifting
Kids specific Selle Royal saddle for maximum riding comfort
Lightweight alloy rims
24" x 1.95" knobby tyres

CODES	
Gloss Black / Gloss Red / Gloss Orange	17235
Gloss Blue / Gloss Lime / Gloss Green	17236
GEOMETRY	
STACK	496
REACH	374
STAND OVER HEIGHT	359
EFFECTIVE TOP TUBE	526
SEAT TUBE (CENTRE TO TOP)	318
SEAT ANGLE	73.0°
HEAD TUBE LENGTH	110
HEAD ANGLE	68.0°
WHEEL BASE	1014
CHAIN STAY LENGTH	410
BB DROP	30
FORK RAKE	38
AXLE TO CROWN	410
REAR DROPOUT SPACING	135

Alloy butted 6061 24" frame with 50mm	CRANKSET	Alloy 42 x 32 x 22T L: 152mm	BRAKES	Alloy linear pull brakes
	воттом	Nutted bottom bracket	WHEELS	
	BRACKET			hubs and stainless spokes
	PEDALS	High impact nylon	TYRES	24 x 1.95"
Semi-sealed 1-1/8" A-head	F. DERAILLEUR	Shimano TZ-30	SADDLE	Selle Royal Kids Specific
	R. DERAILLEUR	Shimano TY-300	SEATPOST /	Alloy 27.2mm with alloy QR clamp
Low riser bar W: 560mm	CHIET LEVEDS	Chimana FF 41 F7 FIRE 21 and ad	CLAMP	
Kraton grips		'	EVTDAC	Vieletand
	CASSETTE	Shimano freewheel 7 speed 14-28T	EXTRAS	Kickstalia
A-head 2 Bolt MTB stem with Rise: 10° Bore: 25.4mm, L: 75mm.	CHAIN	KMC Z-51		
	bi-oval down tube Suspension fork with 50mm travel with alloy crown and lowers Semi-sealed 1-1/8" A-head Low riser bar W: 560mm Kraton grips A-head 2 Bolt MTB stem with Rise: 10"	bi-oval down tube Suspension fork with 50mm travel with alloy crown and lowers Semi-sealed 1-1/8" A-head F. DERAILLEUR R. DERAILLEUR Cow riser bar W: 560mm Kraton grips CASSETTE A-head 2 Bolt MTB stem with Rise: 10"	bi-oval down tube Suspension fork with 50mm travel with alloy crown and lowers Semi-sealed 1-1/8" A-head F. DERAILLEUR Shimano TZ-30 R. DERAILLEUR Kraton grips CASSETTE A-head 2 Bolt MTB stem with Rise: 10" Nutted bottom bracket BRACKET PEDALS High impact nylon Shimano TZ-30 R. DERAILLEUR Shimano TY-300 SHIFT LEVERS Shimano EF-41 EZ FIRE 21 speed CASSETTE Shimano freewheel 7 speed 14-28T	bi-oval down tube Suspension fork with 50mm travel with alloy crown and lowers Semi-sealed 1-1/8" A-head F. DERAILLEUR R. DERAILLEUR Shimano TZ-30 SADDLE R. DERAILLEUR Shimano TY-300 SEATPOST / Low riser bar W: 560mm SHIFT LEVERS A-head 2 Bolt MTB stem with Rise: 10" CASSETTE SHimano freewheel 7 speed 14-28T A-head 2 Bolt MTB stem with Rise: 10" Nutted bottom bracket WHEELS WHEELS Shimano TZ-30 SADDLE Shimano TY-300 SEATPOST / CLAMP SHIFT LEVERS Shimano freewheel 7 speed 14-28T A-head 2 Bolt MTB stem with Rise: 10"

COUGAR



KEY FEATURES
Kids specific geometry with lower stand over height
Front suspension for maximum riding comfort
Quilled stem for maximum adjustability
Easy shifting 7 speed Shimano
Kids specific Selle Royal saddle for maximum riding comfort
Lightweight alloy rims
24" x 1.95" knobby tyres

CODES		
Gloss Black / Gloss Blue / Gloss Lime	17237	
Gloss Lime / Gloss Black / Gloss Blue	17238	
GEOMETRY		
STACK	496	
REACH	374	
STAND OVER HEIGHT	359	
EFFECTIVE TOP TUBE	526	
SEAT TUBE (CENTRE TO TOP)	318	
SEAT ANGLE	73.0°	
HEAD TUBE LENGTH	110	
HEAD ANGLE	68.0°	
WHEEL BASE	1014	
CHAIN STAY LENGTH	410	
BB DROP	30	
FORK RAKE	38	
AXLE TO CROWN	410	•
REAR DROPOUT SPACING	135	

FRAME	Alloy butted 6061 24" frame with 50mm bi-oval down tube	CRANKSET	Alloy 36T with double chainguard L: 152mm		KMC Z-51 Alloy linear pull brakes
FORK	40mm travel with pressed crown and alloy lowers	BOTTOM BRACKET	Nutted bottom bracket	WHEELS	24" Alloy 32 hole rims with nutted hubs stainless spokes
HEADSET	Semi-sealed 1-1/8" threaded		High impact nylon		24 x 1.95"
		F. DERAILLEUR		SADDLE	Selle Royal Kids Specific
HANDLEBAR	Low riser bar W: 560mm	R. DERAILLEUR	Shimano TY-300	SEATPOST /	27.2mm with alloy QR clamp
GRIP	Kraton grips	SHIFT LEVERS	Shimano Revoshift 7 speed rear	CLAMP	, , , ,
HEADSTEM	Quill stem	CASSETTE	Shimano freewheel 7 speed 14-28T	EXTRAS	Kickstand

VERVE



KEY FEATURES
Kids specific geometry with lower stand over height
Front suspension for maximum riding comfort
Alloy A-head stem, with threadless steer tube
21 speed, Shimano EZ-fire shifting
Kids specific Selle Royal saddle for maximum riding comfort
Lightweight alloy rims
Easy rolling semi slick tyres

CODES		
Gloss White / Gloss Pink / Gloss Lavender	17239	
Gloss Lavender / Gloss White	17240	
GEOMETRY		
STACK	496	
REACH	374	
STAND OVER HEIGHT	313	
EFFECTIVE TOP TUBE	526	
SEAT TUBE (CENTRE TO TOP)	318	
SEAT ANGLE	73.0°	
HEAD TUBE LENGTH	110	
HEAD ANGLE	68.0°	
WHEEL BASE	1013	
CHAIN STAY LENGTH	410	
BB DROP	30	
FORK RAKE	38	
AXLE TO CROWN	410	
REAR DROPOUT SPACING	135	

FRAME	Butted alloy 6061 24" step through girls	CRANKSET	Alloy 42 x 32 x 22T L: 152mm	BRAKES	Alloy linear pull brakes
FORK	aluminium frame with snake stays Suspension fork with 50mm travel with	BOTTOM BRACKET	Nutted bottom bracket	WHEELS	24" Alloy 32 hole rims with alloy nutted hubs and stainless spokes
	alloy crown and lowers	PEDALS	High impact nylon	TYRES	Semi-slick 24 x 1.75" dual tread
HEADSET	Semi-sealed 1-1/8" A-head	F. DERAILLEUR	Shimano TZ-30	SADDLE	Selle Royal Kids Specific
		R. DERAILLEUR	Shimano TY-300	SEATPOST /	Alloy 27.2mm with alloy QR clamp
HANDLEBAR	Low riser bar W: 560mm	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	CLAMP	
GRIP	Kraton grips	CASSETTE	Shimano freewheel 7 speed 14-28T	EXTRAS	Kickstand
HEADSTEM	A-head 2 Bolt MTB stem with Rise: 10° Bore: 25.4mm, L: 75mm.		KMC Z-51		

PARIS



KEY FEATURES
Kids specific geometry with lower stand over height
Front suspension for maximum riding comfort
Quilled stem for maximum adjustability
Easy shifting 7 speed Shimano
Kids specific Selle Royal saddle for maximum riding comfort
Lightweight alloy rims
Easy rolling semi slick tyres

CODES		
Gloss White / Gloss Lavender / Gloss Blue	17241	
Gloss Pink / Gloss White	17242	
GEOMETRY		
STACK	496	
REACH	374	
STAND OVER HEIGHT	313	
EFFECTIVE TOP TUBE	526	
SEAT TUBE (CENTRE TO TOP)	318	
SEAT ANGLE	73.0°	
HEAD TUBE LENGTH	110	
HEAD ANGLE	68.0°	
WHEEL BASE	1013	
CHAIN STAY LENGTH	410	
BB DROP	30	
FORK RAKE	38	
AXLE TO CROWN	410	
REAR DROPOUT SPACING	135	

FRAME	Butted alloy 6061 24" step through girls aluminium frame with snake stays	CRANKSET	Alloy 36T with double chainguard L: 152mm		KMC Z-51 Alloy linear pull brakes
FORK	40mm travel with pressed crown and alloy lowers	BOTTOM BRACKET	Nutted bottom bracket		24" Alloy 32 hole rims with nutted hubs and stainless spokes
HEADSET	Semi-sealed 1-1/8" threaded	PEDALS F. DERAILLEUR	1 0 1 7		Semi-slick 24 x 1.75" dual tread
HANDLEBAR	Low riser bar W: 560mm		Shimano TY-300		Selle Royal Kids Specific 27.2mm with alloy QR clamp
GRIP	Kraton grips	SHIFT LEVERS	Shimano Revoshift 7 speed rear	CLAMP	
HEADSTEM	Quill stem	CASSETTE	Shimano freewheel 7 speed 14-28T	EXTRAS	Kickstand