

A man with a beard and a black helmet is riding a black and red mountain bike on a dirt trail. He is wearing a light blue t-shirt, black shorts, and a black watch. The background is a lush green forest with tall trees and bushes. The sky is blue with some clouds.

 **APOLLO**
BICYCLES

2021

MOUNTAIN

TRAIL

Trail D 30
Trail D 20
Trail D 10
Trail 30
Trail 20
Trail 10

XC

Comp 30
Comp 20
Comp 10

RECREATIONAL

Xpert 20
Xpert 10
Aspire 30
Aspire 30 WS
Aspire 20
Aspire 20 WS
Aspire 10
Aspire 10 WS
Summit 10
Summit 10 WS

FAT BIKE

Stout 40
Stout 20
Stout 10

ROAD

ENDURANCE

Ultra 30
Ultra 20
Ultra 10
Giro 40
Giro 30
Giro 20

GRAVEL

Scout 30
Scout 10

URBAN

RAIL TRAIL

Transfer 30
Transfer 20
Transfer 10
Transfer 10 WS

CITY

Trace 30
Trace 20
Trace 20 WS
Trace 10
Trace 10 WS

FLAT BAR ROAD

Exceed 30 Disc
Exceed 20 Disc
Exceed 10 Disc

CLASSIC

Mark III
Mark II
Mark III WS
Mark II WS

LIFESTYLE

E-BIKE

Eon Commuter 20
Eon Comfort 20
Eon Commuter 10
Eon Comfort 10

HYBRID

Altura WS
Incline
Shoreline WS
Villa WS

TANDEM

Syncro 700

YOUTH

SPORT

Aspire 24

YOUTH RECREATIONAL

Panther
Cougar
Verve
Paris

MOUNTAIN



MTB OVERVIEW

RACE-READY / PERFORMANCE

TRAIL

Trail ready full suspension geometry with Boost 148 rear end.

Long top tube with short 45mm extension stem.

140mm travel front suspension and 130mm travel rear suspension.

Tough Boost 27.5" wheels built with quality hubs and extra wide rim profiles

Aggressive 27.5" x 2.6 plus size tyres.

Slack head tube angle for aggressive trail riding.

Long top tube with short 45mm extension stem.

120mm travel suspension.

Tough 27.5" wheels built with quality hubs and 32mm width rim.

Aggressive 27.5" x 2.35 tyres.

XC

XC ready 100mm travel front suspension.

Lightweight 29" wheels built with quality hubs and 21mm width rim.

Light weight and durable 6061 alloy frame.

Fast rolling 29" XC tyres.

Aggressive race geometry.

FAT BIKE

Custom carbon or lightweight 6061 alloy fat bike specific frames.

Lightweight and durable forks.

26" oversized fat bike tyres for max traction on low friction surfaces.

Sram shifting components.

Hydraulic disc brakes front and rear with larger diameter rotors for maximum stopping power.

27.5" PLUS



TRAIL D 30



TRAIL D 20



TRAIL D 10

27.5"



TRAIL 30



TRAIL 20



TRAIL 10

29"



COMP 30



COMP 20



COMP 10

26"



STOUT 40



STOUT 20



STOUT 10

RECREATIONAL RIDING

RECREATIONAL MTB

Solid alloy frame.

Quality built wheels with alloy rims.

Quality brakes & shifting.

Plush travel suspension front fork, for extra riding comfort.

Choose between 29", 27.5" or 26" wheel size.

29"



XPERT 20



XPERT 10

27.5"



ASPIRE 30



ASPIRE 20



ASPIRE 10



ASPIRE 30 WS



ASPIRE 20 WS



ASPIRE 10 WS

26"



SUMMIT 10



SUMMIT 10 WS



TRAIL D 30

27.5" CARBON TRAIL DUAL SUSPENSION - 1 X 12 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	M	L
Matte Charcoal / Gloss Orange	20051	20052

SPECIFICATIONS

FRAME	27.5" Plus carbon dual suspension frame, UD carbon, 130mm (5") travel, 1-1/8 - 1-1/2" head tube, 12x148mm Boost	HEAD STEM	Apollo 3D forged stem, 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CASSETTE	SRAM 12 speed cassette 10 - 50T
FORK	Rockshox Pike Charger 2 RC, tapered alloy steerer, 140mm travel, Boost, with Maxle Stealth	CRANKSET	SRAM GX EAGLE 1x12 speed crank 32T L: S=170mm, M/L=175mm	CHAIN	SRAM GX EAGLE 12 speed
REAR SHOCK	Rockshox Monarch RT3	BOTTOM BRACKET	SRAM DUB BSA	BRAKES	SRAM Guide R hydraulic disc brakes, 200mm front 180mm rear rotors
HEADSET	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings	PEDALS	Nil	WHEELS	27.5" DT Swiss M1900 complete wheelset
HANDLEBAR	Apollo alloy riser bar 31.8mm W: 740mm, sweep: 5°	F.	Nil	TYRES	Veetire Flow Snap. 27.5 x 2.6, folding bead, Tackee Compound
GRIP	Lock-on grips, Kraton rubber	DERAILLEUR	SRAM GX EAGLE 12 speed	SADDLE	Apollo MTB sport saddle
		R. DERAILLEUR	SRAM GX EAGLE 12 speed	SEATPOST/CLAMP	KS LEV Si 125mm travel dropper post 31.6mm
		SHIFT LEVERS	SRAM GX EAGLE 12 speed trigger shifter	EXTRAS	N/A

TRAIL D 20

27.5" CARBON TRAIL DUAL SUSPENSION - 1 X 12 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	M	L
Matte Nude Carbon / Gloss Black	20055	20056

SPECIFICATIONS

FRAME	27.5" Plus carbon dual suspension frame, UD carbon, 130mm (5") travel, 1-1/8 - 1-1/2" head tube, 12x148mm Boost	HEAD STEM	Apollo 3D forged stem, 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CHAIN	SRAM Eagle 12 speed
FORK	Rockshox 35 Gold RL tapered alloy steerer, 140mm travel, Boost, with Maxle Stealth	CRANKSET	SRAM SX Eagle 32T L: S=170mm, M/L=175mm	BRAKES	SRAM Level hydraulic disc brakes, F:180mm / R:160mm rotors
REAR SHOCK	Rockshox Monarch R	BOTTOM BRACKET	SRAM Power Spline	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, 12 x 148mm rear hub and 15 x 110mm Thru Axle front hub
HEADSET	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings	PEDALS	Low profile high impact resin	TYRES	Veetire Flow Snap. 27.5 x 2.6, wire bead
HANDLEBAR	Apollo alloy riser bar 31.8mm W: 740mm, sweep: 5°	F. DERAILLEUR	Nil	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	R. DERAILLEUR	SRAM SX Eagle	SEATPOST/ CLAMP	KS E30i 125mm travel dropper post 31.6mm
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	EXTRAS	N/A
		CASSETTE	SRAM PG-1210, 11-50T		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRAIL D 10

27.5" TRAIL DUAL SUSPENSION - 1 X 12 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	M	L	XL
Matte Charcoal / Lime	20057	20058	20059

SPECIFICATIONS

FRAME	27.5" Trail alloy dual suspension frame, 130mm (5") travel. 1-1/8 - 1-1/2" head tube, 12x148mm Boost	HEAD STEM	Apollo 3D forged stem, 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CHAIN	SRAM Eagle 12 speed
FORK	Rockshox 35 Gold RL, tapered alloy steerer, 140mm travel, Boost, with Maxle Stealth	CRANKSET	SRAM SX Eagle 32T L: S=170mm, M/L=175mm	BRAKES	SRAM Level hydraulic disc brakes, F:180mm / R:160mm rotors
REAR SHOCK	Rockshox Monarch R	BOTTOM BRACKET	SRAM Power Spline	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, 12 x 148mm rear hub and 15 x 110mm Thru Axle front hub
HEADSET	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings	PEDALS	Low profile high impact resin	TYRES	Veetire Flow Snap. 27.5 x 2.6, wire bead
HANDLEBAR	Apollo alloy riser bar 31.8mm W: 740mm, sweep: 5°	F. DERAILLEUR	Nil	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	R. DERAILLEUR	SRAM SX Eagle	SEATPOST/CLAMP	KS 860i Dropper Post 125mm travel, 31.6mm
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	EXTRAS	N/A
		CASSETTE	SRAM PG-1210, 11-50T		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Matte Green / Orange	20069	20070	20071

SPECIFICATIONS

FRAME	27.5" lightweight trail specific alloy frame with integrated head tube, internal cable routing, replaceable derailleur hanger	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CHAIN	SRAM Eagle 12 speed
FORK	RST VIBE 110, 140mm travel, Air Spring with hydraulic lockout and preload, boost, 15mm Thru axle	CRANKSET	SRAM NX Eagle 32T, L: S=170mm, M/L =175mm	BRAKES	SRAM Level hydraulic disc brakes, F:180mm / R:160mm rotors
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM Power Spline	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, Boost front and rear alloy disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8" - 1.5" tapered	PEDALS	Low profile high impact resin	TYRES	Veetire Flow Snap 27.5 x 2.35" wire bead
HANDLEBAR	Alloy low riser, W: 700mm, R: 15mm, bore: 31.8mm, sweep: 5°	F. DERAILEUR	Nil	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	R. DERAILEUR	SRAM NX Eagle	SEATPOST/ CLAMP	KS 860i dropper post 125mm travel, 31.6mm
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	EXTRAS	N/A
		CASSETTE	SRAM PG-1210, 11-50T		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRAIL 20

27.5" MTB - 1 X 12 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Matte Green / Lime	20072	20073	20074

SPECIFICATIONS

FRAME	27.5" lightweight trail specific alloy frame with integrated head tube, internal cable routing, replaceable derailleur hanger	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CASSETTE	SRAM PG-1210, 11-50T
FORK	RST Aerial Air 27.5 TnL, Air Spring, 120mm travel with hydraulic lockout and preload	CRANKSET	SRAM SX Eagle 32T L: S=170mm, M/L=175mm	CHAIN	SRAM Eagle 12 speed
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM Power Spline	BRAKES	Tektro HD-M275 hydraulic disc brakes, F:180mm / R:160mm rotors
HEADSET	A-head semi integrated 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, alloy disc hubs and stainless spokes
HANDLEBAR	Alloy low riser, W: 700mm, R: 15mm, bore: 31.8mm, sweep: 5°	F. DERAILLEUR	Nil	TYRES	Veetire Flow Snap 27.5 x 2.35" wire bead
GRIP	Lock-on grips, Kraton rubber	R. DERAILLEUR	SRAM SX Eagle	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	SEATPOST/CLAMP	Alloy two bolt micro adjust, 27.2mm, L:350mm
				EXTRAS	N/A

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Matte Green / Black	20075	20076	18142

SPECIFICATIONS

FRAME	27.5" lightweight trail specific alloy frame with integrated head tube, internal cable routing, replaceable derailleur hanger	CRANKSET	Alloy MTB crank 28T L: S=170mm, M/L=175mm	CHAIN	KMC X-10
FORK	RST Blaze 27.5 TnL, 120mm travel with hydraulic lockout and preload, alloy crown and lowers.	BOTTOM BRACKET	BSA threaded	BRAKES	Tektro HD-M275 hydraulic disc brakes, F:180mm / R:160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, alloy disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8"	F. DERAILLEUR	Nil	TYRES	Veetire Flow Snap 27.5 x 2.35" wire bead
HANDLEBAR	Alloy low riser, W: 700mm, R: 15mm, bore: 31.8mm, sweep: 5°	R. DERAILLEUR	SRAM X5	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	SHIFT LEVERS	SRAM X5 Trigger, 10 speed	SEATPOST/CLAMP	Alloy two bolt micro adjust, 27.2mm, L:350mm
HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CASSETTE	Sunrace CSMS3 10 speed cassette 11 - 42T	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



CODES	S	M	L
Matte Black / Gloss Black	20060	20061	20062

SPECIFICATIONS

FRAME	29er lightweight XC specific alloy frame with tapered head tube, internal cable routing and replaceable derailleur hanger	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/ M=75mm, L=90mm	CHAIN	SRAM Eagle 12 speed
FORK	Rockshox 30 Gold RL, 100mm travel, Air Spring with hydraulic lockout and preload	CRANKSET	SRAM NX Eagle 34T, L: S=170mm, M/L=175mm	BRAKES	SRAM Level hydraulic disc brakes, 160mm rotors
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM Power Spline	WHEELS	29" Weinmann U-26 alloy 32 hole F/V double wall disc specific rims, Boost front and rear alloy disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8" - 1-1/2" tapered	PEDALS	Low profile high impact resin	TYRES	Veetire Trail Taker 29 x 2.20" wire bead
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	F. DERAILLEUR	Nil	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	R. DERAILLEUR	SRAM NX Eagle	SEATPOST/ CLAMP	KS 860i dropper post 125mm travel, 31.6mm
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	EXTRAS	N/A
		CASSETTE	SRAM PG-1210, 11-50T		

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Matte Navy Blue / Orange	20063	20064	20065

SPECIFICATIONS

FRAME	29er lightweight XC specific alloy frame with tapered head tube, internal cable routing and replaceable derailleur hanger	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/ M=75mm, L=90mm	CASSETTE	SRAM PG-1210, 11-50T
FORK	RST Aerial Air 29 TnL, Air Spring, 100mm travel with hydraulic lockout and preload	CRANKSET	SRAM SX Eagle 34T L: S=170mm, M/L=175mm	CHAIN	SRAM Eagle 12 speed
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM Power Spline	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
HEADSET	A-head semi integrated 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	29" Weinmann U-26 alloy double wall disc rim, 32 hole F/V, anodised disc hubs and stainless spokes
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	F. DERAILLEUR	Nil	TYRES	Veetire Trail Taker 29 x 2.20" wire bead
GRIP	Lock-on grips, Kraton rubber	R. DERAILLEUR	SRAM SX Eagle	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	SEATPOST/ CLAMP	27.2mm alloy, micro adjust with twin bolt head, L:400mm
				EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



CODES	S	M	L
Matte Black / Blue	20066	20067	20068

SPECIFICATIONS

FRAME	29er lightweight XC specific alloy frame with tapered head tube, internal cable routing and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 30T L: S=170mm, M/L=175mm	CHAIN	KMC X-10
FORK	RST Blaze 29 TnL, 100mm travel with hydraulic lockout and preload, alloy crown and lowers.	BOTTOM BRACKET	BSA threaded	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	29" Weinmann U-26 alloy double wall disc rim, 32 hole F/V, anodised disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8"	F. DERAILLEUR	Nil	TYRES	Veetire Trail Taker 29 x 2.20" wire bead
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	R. DERAILLEUR	SRAM X5	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	SHIFT LEVERS	SRAM X5 Trigger, 10 speed	SEATPOST/CLAMP	Alloy 27.2mm alloy, L:400mm, micro adjust with quick release clamp
HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M=75mm, L=90mm	CASSETTE	Sunrace CSMS3 10 speed cassette 11 - 42T	EXTRAS	N/A

TRAIL

XC

RECREATIONAL



CODES	S	M	L	XL	XXL
Matte Black / Charcoal / Red	20078	20079	20080	20081	20082

SPECIFICATIONS

FRAME	Lightweight 6061 alloy disc specific 29er frame with taper wall technology and integrated head tube, internal cable routing	HEAD STEM	Forged alloy A-head. Bore: 31.8mm Ext: S/M=75mm, L=90mm, XL=105mm	CASSETTE	Shimano HG-200 8 speed cassette 12-32T
FORK	RST Gila 29, 100mm travel with preload, 51mm offset, alloy crown and lowers	CRANKSET	Alloy MTB crank 36 x 22T L=170mm	CHAIN	KMC Z-7
REAR SHOCK	N/A	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
HEADSET	Semi integrated A-head 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	29" alloy double wall disc rim, 32 hole A/V, anodised disc hubs and stainless spokes
HANDLEBAR	Alloy flat bar bore: 31.8mm W: 620mm, sweep: 9°	F. DERAILLEUR	Shimano FD-M315 2 speed	TYRES	Kenda 29 x 2.1", wire bead
GRIP	Kraton rubber closed end grips	R. DERAILLEUR	Shimano TX-800 8 speed	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	Shimano SL-M315 2x8 speed	SEATPOST/CLAMP	Alloy 27.2mm alloy, L:400mm, micro adjust with quick release clamp
				EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

FAT BIKE



CODES	S	M	L	XL
Gloss black / red / charcoal	19058	19059	19060	19061

SPECIFICATIONS

FRAME	Lightweight 6061 alloy disc specific 29er frame with taper wall technology and integrated head tube	HEAD STEM	Forged alloy A-head Bore: 31.8mm Ext: S/M=90mm, L/XL=105mm	CASSETTE	Shimano HG-20 7 speed cassette 12-28T
FORK	29" suspension fork, 80mm travel, coil spring, alloy crown and alloy lowers.	CRANKSET	Cold forged 42 x 32 x 22T L=170mm	CHAIN	KMC Z-51
REAR SHOCK	N/A	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
HEADSET	Semi integrated A-head 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	29" alloy double wall disc rim, 32 hole A/V, anodised disc hubs and stainless spokes
HANDLEBAR	Flat bar bore: 31.8mm W: 640mm, sweep: 6°	F. DERAILLEUR	Shimano TY-500	TYRES	Kenda 29 x 2.1", wire bead
GRIP	Kraton rubber closed end grips	R. DERAILLEUR	Shimano TX-800 7 speed	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	Shimano ST-EF-500 21 speed	SEATPOST/CLAMP	Alloy 27.2mm alloy, L:350mm, micro adjust
				EXTRAS	N/A





ASPIRE 30

27.5" MTB - 2 X 8 SPEED

TRAIL

XC

RECREATIONAL



CODES	S	M	L	XL
Matte Charcoal / Black / Red	20104	20105	20106	20107

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy disc specific frame with integrated head tube, internal cable routing, snake stays and replaceable derailleur hanger	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: XS/S=75mm, M/L=90mm, XL=105mm	CASSETTE	Shimano HG-200 8 speed cassette 12-32T
FORK	RST GILA 27.5, 80mm travel, preload.	CRANKSET	Alloy MTB crank 36 x 22T L=170mm	CHAIN	KMC Z-7
REAR SHOCK	N/A	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
HEADSET	Semi integrated A-head 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless spokes
HANDLEBAR	Alloy low riser, W: 640mm, R: 20mm, bore: 31.8mm, sweep: 6°	F. DERAILLEUR	Shimano FD-M315 2 speed	TYRES	Kenda 27.5 x 2.1" wire bead
GRIP	Kraton grip	R. DERAILLEUR	Shimano TX-800 8 speed	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	Shimano SL-M315 2x8 speed	SEATPOST/CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
				EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ASPIRE 30 WS

27.5" WOMEN'S SPECIFIC MTB - 2 X 8 SPEED

WS
women's specific

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	XS	S	M
Matte Black / Turquoise / Silver	20108	20109	20110

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy female disc specific frame with integrated head tube, internal cable routing, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 36 x 22T L=170mm	CHAIN	KMC Z-7
FORK	RST GILA 27.5, 80mm travel, preload.	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless spokes
HEADSET	Semi integrated A-head 1-1/8"	F. DERAILLEUR	Shimano FD-M315 2 speed	TYRES	Kenda 27.5 x 2.1" wire bead
HANDLEBAR	Alloy low riser, W: 620mm, R: 20mm, bore: 31.8mm, sweep: 6°	R. DERAILLEUR	Shimano TX-800 8 speed	SADDLE	Apollo MTB sport saddle
GRIP	Kraton grip	SHIFT LEVERS	Shimano SL-M315 2x8 speed	SEATPOST/CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: XS/S=75mm, M=90mm	CASSETTE	Shimano HG-200 8 speed cassette 12-32T	EXTRAS	N/A

ASPIRE 20

27.5" MTB - 3 X 7 SPEED - DISC

TRAIL

XC

RECREATIONAL



CODES	XS	S	M	L	XL
Matte Black / Lime / Charcoal	20111	20112	20113	20114	20115
Matte Black / Charcoal / Silver	20116	20117	20118	20119	20120

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy disc specific frame with integrated head tube, internal cable routing, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	CHAIN	KMC Z-7
FORK	27.5, 80mm travel, preload.	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless spokes
HEADSET	Semi integrated A-head 1-1/8"	F. DERAILLEUR	Shimano TZ-500	TYRES	Kenda 27.5 x 2.1" wire bead
HANDLEBAR	Low riser, W: 640mm, R: 20mm, bore: 31.8mm, sweep: 6°	R. DERAILLEUR	Shimano TY-300	SADDLE	Apollo MTB sport saddle
GRIP	Kraton grip	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/ CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=75mm, M/L=90mm, XL=105mm	CASSETTE	Shimano HG-20 7 speed cassette 12-28T	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ASPIRE 20 WS

27.5" WOMEN'S SPECIFIC MTB - 3 X 7 SPEED - DISC

WS
women's specific

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	XS	S	M
Matte Black / Charcoal / Purple	20121	20122	20123

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy female disc specific frame with integrated head tube, internal cable routing, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	CHAIN	KMC Z-7
FORK	27.5, 80mm travel, preload	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless spokes
HEADSET	Semi integrated A-head 1-1/8"	F. DERAILLEUR	Shimano TZ-500	TYRES	Kenda 27.5 x 2.1" wire bead
HANDLEBAR	Low riser, W: 620mm, R: 20mm, bore: 31.8mm, sweep: 6°	R. DERAILLEUR	Shimano TY-300	SADDLE	Apollo MTB sport saddle
GRIP	Kraton grip	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=75mm, M=90mm	CASSETTE	Shimano HG-20 7 speed cassette 12-28T	EXTRAS	N/A

ASPIRE 10

27.5" MTB - 3 X 7 SPEED - V-BRAKE

TRAIL

XC

RECREATIONAL



CODES	XS	S	M	L	XL
Matte Black / Chrome / Blue	20124	20125	20126	20127	20128
Matte Black / Charcoal / Red	20129	20130	20131	20132	20133

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy frame with integrated head tube, snake stays and replaceable derailleur hanger	HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=75mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed
FORK	27.5" suspension fork, 80mm travel	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	CASSETTE	Shimano 7 speed 14-28T freewheel
REAR SHOCK	N/A	BOTTOM BRACKET	Cartridge bottom bracket	CHAIN	KMC Z-7
HEADSET	Semi integrated A-head 1-1/8"	PEDALS	Low profile high impact resin	BRAKES	Alloy linear pull brakes
HANDLEBAR	Low riser, W: 640mm, R: 20mm, bore: 31.8mm, sweep: 6°	F. DERAILLEUR	Shimano TZ-500	WHEELS	27.5" alloy 32 hole A/V double wall rims, alloy hubs and stainless spokes
GRIP	Kraton grip	R. DERAILLEUR	Shimano TY-300	TYRES	Kenda 27.5 x 2.1" wire bead
				SADDLE	Apollo MTB sport saddle
				SEATPOST/ CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
				EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ASPIRE 10 WS

27.5" WOMEN'S SPECIFIC MTB -
3 X 7 SPEED - V-BRAKEWS
women's specific

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES

Matte Black / Pink / Slate

XS

20134

S

20135

M

20136

SPECIFICATIONS

FRAME	Lightweight 6061 female specific, 27.5" alloy frame with integrated head tube, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	CHAIN	KMC Z-7
FORK	27.5" suspension fork, 80mm travel	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall rims, alloy hubs and stainless spokes
HEADSET	Semi integrated A-head 1-1/8"	F. DERAILLEUR	Shimano TZ-500	TYRES	Kenda 27.5 x 2.1" wire bead
HANDLEBAR	Low riser, W: 620mm, R: 20mm, bore: 31.8mm, sweep: 6°	R. DERAILLEUR	Shimano TY-300	SADDLE	Apollo MTB sport saddle
GRIP	Kraton grip	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=75mm, M=90mm	CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

TRAIL

XC

RECREATIONAL



CODES

Gloss Black / Gloss Lime /
Gloss Blue

XS

18195

S

18196

SPECIFICATIONS

FRAME	Butted 6061 aluminium low standover frame with snake stays and replaceable derailleur hanger	HEAD STEM	Alloy quill stem 1-1/8, L: 80mm, bore: 25.4mm	CASSETTE	Shimano 7 speed 14-28T freewheel
FORK	26" suspension, 50mm travel coil spring, pressed crown with Hi-Ten lowers	CRANKSET	Alloy MTB crank 42 x 32 x 22T L: 170mm	CHAIN	KMC Z-7
REAR SHOCK	N/A	BOTTOM BRACKET	Nutted type	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	Non-slip resin	WHEELS	26" alloy 32 hole A/V rims, quick release front wheel. Stainless spokes
HANDLEBAR	Low riser, W: 580mm, R: 20mm, bore: 25.4mm, sweep: 6°	F. DERAILLEUR	Shimano TZ-500	TYRES	26 x 2.0" wire bead
GRIP	Kraton comfort grip	R. DERAILLEUR	Shimano TY-300	SADDLE	Apollo Comfortech saddle
		SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/CLAMP	27.2mm L:300mm with QR clamp
				EXTRAS	Kickstand

SUMMIT 10 WS

26" WOMEN'S SPECIFIC MTB - 3 X 7 SPEED

WS
women's specific

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	XS	S
Gloss Silver / Gloss White / Gloss Blue	18197	18198

SPECIFICATIONS

FRAME	Butted 6061 aluminium low step through women's specific frame with snake stays and replaceable derailleur hanger	HEAD STEM	Alloy quill stem 1-1/8, L: 80mm, bore: 25.4mm	CASSETTE	Shimano 7 speed 14-28T freewheel
FORK	26" suspension, 50mm travel coil spring, pressed crown with Hi-Ten lowers	CRANKSET	Alloy MTB crank 42 x 32 x 22T L: 170mm	CHAIN	KMC Z-7
REAR SHOCK	N/A	BOTTOM BRACKET	Nutted type	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	Non-slip resin	WHEELS	26" alloy 32 hole A/V rims, quick release front wheel. Stainless spokes
HANDLEBAR	Low riser, W: 580mm, R: 20mm, bore: 25.4mm, sweep: 6°	F. DERAILLEUR	Shimano TZ-500	TYRES	26 x 2.0" wire bead
GRIP	Kraton comfort grip	R. DERAILLEUR	Shimano TY-300	SADDLE	Apollo Comfortech women's specific
		SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/CLAMP	27.2mm L:300mm with QR clamp
				EXTRAS	Kickstand

TRAIL

XC

RECREATIONAL



CODES	M	L
Matte nude carbon / Matte red / Matte blue	16285	16286

SPECIFICATIONS

FRAME	Carbon modular monocoque Fat bike frame, Tapered 1-1/8 to 1.5 head tube, 12x142mm dropout, direct mount front derailleur	HEAD STEM	Factor 31.8mm 4 bolt stem, Ext: M=90mm, L=100mm,	CHAIN	KMC X-10
FORK	Carbon modular monocoque Fat bike fork, tapered 1-1/8-1.5 steerer, 15mm THRU AXLE	CRANKSET	FSA COMET fat bike specific, 10 speed 36 x 22T L: M/L=175mm	BRAKES	SRAM DB5 hydraulic disc brakes with lever adjust, 180mm rotors
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM GXP 100mm sealed cartridge bottom bracket	WHEELS	Sunringle Alloy disc specific rims with square holes for reduced weight, 32 hole F/V, precision sealed bearing disc hubs and stainless spokes
HEADSET	A-head semi integrated, for tapered 1.8-1.5 head tube, cartridge bearings with 8mm cone spacer	PEDALS	Low profile high impact resin	TYRES	26 x 4.8" Snowshoe XL Silica Comp 120 TPI folding bead
HANDLEBAR	Factor butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	F. DERAILLEUR	SRAM X-5 2 x 10 high direct mount	SADDLE	Factor MTB sport saddle
GRIP	Ultra light hex shaped foam racing grips	R. DERAILLEUR	SRAM X-9 type 2 x 10 speed mid cage	SEATPOST/ CLAMP	Factor 31.6mm alloy, micro adjust with twin bolt head, L:400mm
		SHIFT LEVERS	SRAM X-7 20 speed	EXTRAS	N/A
		CASSETTE	SRAM 10 speed cassette 11 - 36T		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

STOUT 20

26" FAT BIKE - 1 X 11 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Matte Black / Matte Orange / Matte Blue	17150	17151	17152

SPECIFICATIONS

FRAME	Triple butted 6061 alloy fat bike frame. Tapered 1-1/8 to 1.5 head tube. 12x142mm dropout, direct mount front derailleur	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M=75mm, L=90mm,	CASSETTE	SRAM 11 speed cassette 11 - 42T
FORK	Apollo 26" Fatty fork, full alloy with tapered 1-1/8-1.5 steerer	CRANKSET	SRAM Stylo fat bike specific, 11 speed 30T L: M/L=175mm	CHAIN	KMC-X11
REAR SHOCK	N/A	BOTTOM BRACKET	FSA 100mm sealed cartridge bottom bracket	BRAKES	SRAM Level hydraulic disc brakes, 180mm rotors
HEADSET	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings with 8mm cone spacer	PEDALS	Low profile high impact resin	WHEELS	26" alloy disc specific rims with square holes for reduced weight, 32 hole F/V, anodised disc hubs and stainless spokes
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	F. DERAILLEUR	N/A	TYRES	26 x 4.8" Snowshoe XL 72 TPI
GRIP	Lock-on grips, Kraton rubber	R. DERAILLEUR	SRAM NX 11 speed	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	SRAM NX 11 speed	SEATPOST/CLAMP	Apollo 27.2mm alloy, micro adjust with twin bolt head, L:400mm
				EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Gloss Green / Gloss Black / Gloss Blue	17153	17154	17155

SPECIFICATIONS

FRAME	Triple butted 6061 alloy fat bike frame. 1-1/8 head tube. Replaceable dropout, direct mount front derailleur	CRANKSET	Alloy 2-pc MTB crank 38 x 24T S=170mm, M/L=175mm	CHAIN	KMC Z-9
FORK	Apollo 26" Fatty fork, full cr-mo steel 1-1/8 steerer	BOTTOM BRACKET	100mm sealed cartridge bottom bracket	BRAKES	Promax DSK-923 hydraulic disc brakes with reach adjust, 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	26" alloy disc specific rims with square holes for reduced weight, 32 hole F/V, anodised disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8"	F. DERAILLEUR	SRAM X-5 high direct mount	TYRES	26 x 4.5" Kenda Juggernaut 60 TPI
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	R. DERAILLEUR	SRAM X-5 x 9 speed long cage	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	SHIFT LEVERS	SRAM X-5	SEATPOST/CLAMP	Apollo 27.2mm alloy, micro adjust with twin bolt head, L:400mm
HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M=75mm, L=90mm,	CASSETTE	SRAM cassette 11 - 34T	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ROAD OVERVIEW



ENDURANCE

Endurance frame and geometry designed for comfort and versatility

700c x 25-28 tyres for fast and smooth rolling

All rider contact points optimised for maximum rider comfort

In-line cable adjuster allows easy shifter adjustments



ULTRA 30



ULTRA 20



ULTRA 10



GIRO 40



GIRO 30



GIRO 20

GRAVEL

Familiar endurance geometry, ideal for comfort during long rides

Extra wide clearance with 700c x 40 tyres

All-new Shimano GRX groupsets, built for smooth and safe gravel riding



SCOUT 30



SCOUT 10

ULTRA 30

700C CARBON ROAD - 2 X 11 SPEED

ENDURANCE



GRAVEL

CODES	S	M	L	XL
Matte Red / Matte Black	18001	18002	18003	18004

SPECIFICATIONS

FRAME	Hi-modulus Mitsubishi carbon modular monocoque disc specific road frame. Box technology down tube with BB386 press fit system, slim seatstays, tapered head tube 1-1/8 to 1-1/2"	HEADSTEM	FSA Gossamer 1-1/8" 3D forged alloy 4 bolt stem. S=100mm, M=110mm, L/XL=120mm	CASSETTE	Shimano 11 speed cassette 11-28T
FORK	Full carbon straight blade disc specific fork with tapered 1-1/8 to 1-1/2" carbon steerer, fully integrated	CRANKSET	Shimano Ultegra, 50/34T L: S=170mm, M=172.5mm, L/XL=175mm	CHAIN	KMC 11 speed
HEADSET	A-head integrated 1-1/2 to 1-1/8" sealed angular cartridge bearings with 15mm cone spacer	BOTTOM BRACKET	Press fit BB386	BRAKES	Shimano BR-R8020 hydraulic road disc brakes with 160mm rotors
HANDLEBAR	FSA Vero Compact 31.8mm alloy W: S/M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c DT Swiss E 1800 Spline DB 23 clincher wheelset
GRIP	Soft PU wrap with gel	F. DERAILLEUR	Shimano Ultegra FD-8000 braze on	TYRES	Veetire Roadrunner 700 x 28c, 90 TPI, Folding Bead, CC – Continuum Compound
		R. DERAILLEUR	Shimano Ultegra RD-R8000 11 speed	SADDLE	Prologo Kappa RS
		SHIFT LEVERS	Shimano Ultegra BR-R8020 22 speed STI hydraulic road shifters	SEATPOST / CLAMP	Factor 27.2mm 350mm long post, twin bolt, forged head, alloy seat clamp

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ULTRA 20

700C CARBON ROAD - 2 X 11 SPEED

ENDURANCE

GRAVEL



CODES	S	M	L	XL
Matte Slate / Matte Black	18006	18007	18008	18009

SPECIFICATIONS

FRAME	Hi-modulus Mitsubishi carbon modular monocoque frame. Box technology down tube with BB386 press fit system, slim seatstays, tapered head tube 1-1/8 to 1-1/2"	HEADSTEM	FSA Energy 1-1/8" 3D forged alloy 4 bolt stem. S=100mm, M=110mm, L/XL=120mm	SHIFT LEVERS	Shimano Ultegra ST-R8000 mechanical 22 speed STI shifters
FORK	Full carbon straight blade fork with tapered 1-1/8 to 1-1/2" carbon steerer, fully integrated	CRANKSET	Shimano Ultegra, 50/34T L: S=170mm, M=172.5mm, L/XL=175mm	CASSETTE	Shimano 11 speed cassette 11-28T
HEADSET	A-head integrated 1-1/2 to 1-1/8" sealed angular cartridge bearings with 15mm cone spacer	BOTTOM BRACKET	Press fit BB86	CHAIN	KMC 11 speed
HANDLEBAR	FSA Energy Compact 31.8mm alloy W: S/M=42cm, L/XL=44cm	PEDALS	Nil	BRAKES	Shimano BR-R8000 Ultegra
GRIP	Soft PU wrap with gel	F. DERAILLEUR	Shimano Ultegra FD-8000 braze on	WHEELS	700c DT Swiss P 1800 Spline clincher wheelset
		R. DERAILLEUR	Shimano Ultegra RD-R8000 11 speed	TYRES	Veetire Roadrunner 700 x 28c, 90 TPI, Folding Bead, CC – Continuum Compound
				SADDLE	Prologo Kappa RS
				SEATPOST / CLAMP	Factor carbon 27.2mm, 300mm post, twin bolt, forged head, alloy seat clamp

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ULTRA 10

700C CARBON ROAD - 2 X 11 SPEED

ENDURANCE



GRAVEL

CODES	S	M	L	XL
Matte Nude Carbon / Matte Red	18011	18012	18013	18014

SPECIFICATIONS

FRAME	Hi-modulus Mitsubishi carbon modular monocoque frame. Box technology down tube with BB386 press fit system, slim seatstays, tapered head tube 1-1/8 to 1-1/2"	HEADSTEM	Factor 1-1/8" 3D forged alloy 4 bolt stem. S=100mm, M=110mm, L/XL=120mm	CASSETTE	Shimano 11 speed cassette 11-28T
FORK	Full carbon straight blade fork with tapered 1-1/8 to 1-1/2" carbon steerer, fully integrated	CRANKSET	Shimano FC-RS500 compact 50 x 34T 2 piece crank, S/M=172.5mm, L/XL=175mm	CHAIN	KMC 11 speed
HEADSET	A-head integrated 1-1/2 to 1-1/8" sealed angular cartridge bearings with 15mm cone spacer	BOTTOM BRACKET	Press fit BB386	BRAKES	Promax dual pivot brake with cartridge pads
HANDLEBAR	Factor butted alloy anatomic shallow drop 31.8mm alloy W: S/M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c Weinmann XM-1 double wall, CNC machined side walls, 32 hole F/V, alloy hubs and stainless spokes.
GRIP	Soft PU wrap with gel	F. DERAILLEUR	Shimano 105 braze on	TYRES	Veetire Roadrunner 700c x 28c, MPC - Multiple Purpose Compound
		R. DERAILLEUR	Shimano 105 11 speed	SADDLE	Factor road
		SHIFT LEVERS	Shimano 105 STI 22 speed shifters	SEATPOST / CLAMP	Factor 27.2mm 350mm long post, twin bolt, forged head, alloy seat clamp

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



CODES	S	M	L
Matte Black / Charcoal	20017	20018	20019

SPECIFICATIONS

FRAME	Superlite butted 6061 alloy, integrated head tube and replaceable derailleur hanger	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem, XS=90mm, S=100mm, M/L=110mm, XL=120mm	SHIFT LEVERS	Shimano 105 STI 22 speed shifters
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	CRANKSET	Shimano FC-RS510 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm, L/XL=175mm	CASSETTE	Shimano 11 speed cassette 11-32T
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	Shimano integrated sealed	CHAIN	KMC X-11
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy V: XS/S/M=42cm, L/XL=44cm	PEDALS	Nil	BRAKES	Shimano BR-R7020 105 hydraulic road disc brakes with 160mm rotors
GRIP	Soft PU wrap with gel	F. DERAILLEUR	Shimano 105 band clamp	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole 11 speed disc hubs with stainless spokes
		R. DERAILLEUR	Shimano 105 11 speed	TYRES	Veetire Roadrunner 700c x 30c, MPC - Multiple Purpose Compound
				SADDLE	Apollo road saddle
				SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

ENDURANCE

GRAVEL



CODES	S	M	L	XL
Gloss Silver / Black	20022	20023	20024	20025

SPECIFICATIONS

FRAME	Superlite butted 6061 alloy, integrated head tube and replaceable derailleur hanger	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem. XS=90mm, S=100mm, M/L=110mm, XL=120mm	CASSETTE	Shimano 11 speed cassette 11-32T
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	CRANKSET	Shimano FC-RS510 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm, L/XL=175mm	CHAIN	KMC X-11
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	Shimano integrated sealed	BRAKES	Tektro MC-C550 mechanical flat mount disc brakes with 160mm rotors
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy W: XS/S/M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole 11 speed disc hubs with stainless spokes
GRIP	Soft PU wrap with gel	F. DERAILLEUR	Shimano 105 band clamp	TYRES	Veetire Roadrunner 700c x 30c, MPC - Multiple Purpose Compound
		R. DERAILLEUR	Shimano 105 11 speed	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano 105 STI 22 speed shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



CODES	S	M	L	XL
Matte Black / Red	20027	20028	20029	20030

SPECIFICATIONS

FRAME	Superlite butted 6061 alloy, integrated head tube and replaceable derailleur hanger	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem, XS=90mm, S=100mm, M/L=110mm, XL=120mm	CASSETTE	Shimano HG-500 10 speed cassette 11-32T
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	CRANKSET	Shimano FC-RS400 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm, L/XL=175mm	CHAIN	KMC X-10
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	Shimano integrated sealed	BRAKES	Tektro MD-C310 mechanical flat mount disc brakes with 160mm rotors
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy V: XS/S/M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole 10 speed disc hubs with stainless spokes
GRIP	Soft PU wrap with gel	F. DERAILLEUR	Shimano Tiagra FD-4700	TYRES	Veetire Roadrunner 700c x 30c, MPC - Multiple Purpose Compound
		R. DERAILLEUR	Shimano Tiagra RD-4700-GS	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano Tiagra 20 speed STI shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

GRAVEL

The road less travelled is not a metaphor, it's the ultimate destination! Dirt, gravel, cracked pavement, or back-country roads are now all open for you to explore. Our gravel series is designed specially for all-surface road riding

The frame and fork use familiar road bike geometry paired with clearance for wider tyres, carrier and fender mounts for you to add whatever accessories you may require.

SHIMANO
GRX

Shimano's new multi surface groupsets provide you the gearing and reliability to make sure you not only explore but enjoy at the same time.





SCOUT

OUT ADVENTURE





ENDURANCE GEOMETRY

Taking our familiar endurance road geometry and pairing it with extra wide tyre clearance delivers a gravel-optimised experience.

*Run 700c x 40c or swap to **650b x 50c** tyres*

SHIMANO GRX

BRAKE WITH CONFIDENCE

New ergonomic brake levers with anti-slip coating keep you comfortable and in control in all riding conditions.

DRIVETRAIN TYRE CLEARANCE

Shimano redesigned the front derailleur and crankset giving the chainline more space, allowing for broader wheel sizes and tyres.

SHIMANO SHADOW RD+

Introduced in Shimano's MTB range and designed for more aggressive riding, this feature gives the derailleur a super low-profile design. It also reduces chain slap, improves chain retention and minimises the risk of clipping obstacles.

COMPONENT BREAKDOWN



RD-RX812

Silent and uninterrupted rear shifting on rough terrain

Adjustable chain stabiliser prevents chain slapping and drops: SHIMANO SHADOW RD+

- Smooth and reliable mixed-surface shifting
 - Switch stabiliser ON/OFF to match the terrain
 - Gravel-tuned clutch tension



FD-RX810-F

Lighter front shifting

Ergonomic power curve: New link (toggle) construction

Natural stroke feeling

- Wider tyre clearance
Chainline +2.5 mm vs. conventional road FD
- Integrated cable tension adjustment



FC-RX810

Optimum gearing for mixed terrains and riding styles

Gravel gear ratios preserve riding rhythm over rough surfaces with wider tyres

- Wider range front system
17T front range
- Gear combination:
48-31 T



ST-RX810

Greater mixed-terrain control

- Gravel inspired lever and bracket ergonomics
- Anti-slip brake lever
- Same light shifting operation as top tier systems



SCOUT 10



RD-RX400

Silent and uninterrupted rear shifting on rough terrain

Adjustable chain stabiliser prevents chain slapping and drops: SHIMANO SHADOW RD+

- Smooth and reliable mixed-surface shifting
 - Switch stabilizer ON/OFF to match the terrain
 - Gravel-tuned clutch tension



FD-RX400

Lighter front shifting

Ergonomic power curve: New link (toggle) construction

Natural stroke feeling

- Wider tyre clearance
Chainline +2.5 mm vs. conventional road FD



FC-RX600

Optimum gearing for mixed terrains and riding styles

Wider gear range for long tours or unknown terrain

- Gear combination: 46-30 T



ST-RX400

Greater mixed-terrain control

- Gravel inspired lever and bracket ergonomics
- Anti-slip brake lever
- Same light shifting operation as top tier systems

SCOUT 30

700C CARBON GRAVEL DISC - 2 X 11 SPEED

ENDURANCE



GRAVEL

CODES	M	L	XL
Matte Slate / Black / Orange	20010	20011	20012

SPECIFICATIONS

FRAME	Hi-modulus carbon monocoque disc specific gravel road frame. BB86 press fit system, slim seatstays, tapered head tube 1-1/8 to 1-1/2"	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem. M/L=110mm, XL=120mm	CASSETTE	Shimano CS-M8000, 11-40T
FORK	Full carbon straight blade flat mount disc fork with tapered 1-1/8 to 1-1/2" carbon steerer, 12mm Thru Axle	CRANKSET	Shimano FC-RX810, GRX, 48 x 31T 2 piece crank, M=172.5mm, L/XL=175mm	CHAIN	KMC X-11
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	BB86 Pressfit	BRAKES	Shimano ST-RX810 GRX hydraulic road disc brakes with 160mm rotors
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy W: M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c DT SWISS R-500-Disc rims, 28 hole 11 speed disc hubs with stainless spokes
GRIP	Soft PU wrap with gel	F. DERAILLEUR	Shimano FD-RX810	TYRES	Veetire G-Sport 700c x 40c, 72 TPI, wire bead MPC - Multiple Purpose Compound
		R. DERAILLEUR	Shimano RD-RX812	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano ST-RX810 22 speed shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

SCOUT 10

700C ALLOY GRAVEL DISC - 2 X 10 SPEED

ENDURANCE

GRAVEL



CODES	M	L	XL
Matte Charcoal / Black / Red	20013	20014	20015

SPECIFICATIONS

FRAME	Superlite butted 6061 alloy gravel road, integrated head tube and replaceable derailleur hanger	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem. M/L=110mm, XL=120mm	CASSETTE	Shimano CS-HG50, 11-36T
FORK	Full carbon straight blade flat mount disc fork with tapered 1-1/8 to 1-1/2" carbon steerer, 12mm Thru Axle	CRANKSET	Shimano FC-RX600, GRX, 46 x 30T 2 piece crank, M=172.5mm, L/XL=175mm	CHAIN	KMC X-10
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	BSA Threaded	BRAKES	Shimano ST-RX400 GRX hydraulic road disc brakes with 160mm rotors
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy W: M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole 10 speed disc hubs with stainless spokes
GRIP	Soft PU wrap with gel	F. DERAILLEUR	Shimano FD-RX400	TYRES	Veetire G-Sport 700c x 40c, 72 TPI, wire bead MPC - Multiple Purpose Compound
		R. DERAILLEUR	Shimano RD-RX400	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano ST-RX400 20 speed shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp



A man with a mustache, wearing a black helmet, a black t-shirt, and blue jeans, is riding a black bicycle with red accents on a paved path. He is looking towards the camera with a slight smile. The background is a blurred urban environment with modern buildings and greenery.

URBAN

RAIL TRAIL
CITY
FLAT BAR ROAD
CLASSIC

URBAN OVERVIEW

RAIL TRAIL

CITY

Designed to be our do-it-all commuter, the Transfer series features a comfortable riding position, and the suspension fork with knobby tyres allows you to go from street to gravel paths with confidence.

- 700c lightweight alloy commuter frame
- Suspension fork offers confidence and control on rough surfaces.
- Wide, multi-terrain tyres for balanced speed, grip and comfort

With riser bars creating a riding position more relaxed and comfortable than a traditional flat bar road bike, the Trace offers smooth and efficient commuting thanks to its wide tyres, rigid fork and reliable gearing. The Trace is the go-to bike for the everyday commuter looking for the perfect balance of agility, toughness, and comfort.

- 700c lightweight alloy commuter frame
- Rigid fork for light and responsive handling.
- Wide tyres for smooth rolling comfort in urban environments



TRANSFER 30



TRANSFER 20



TRANSFER 10



TRANSFER 10 WS



TRACE 30



TRACE 20



TRACE 10



TRACE 20 WS



TRACE 10 WS

FLAT BAR ROAD

Our Exceed Disc series takes our endurance road geometry, and adds powerful disc brakes for riding in all conditions, and the versatility of wide tyre clearance. Combined with our lightweight alloy frame and carbon fork, the Exceed Disc series is built for fitness enthusiasts and dedicated commuters looking for speed and performance.

700c super lightweight alloy frame, endurance road geometry, built for speed

Lightweight carbon fork

Powerful disc brakes

700 x 32c or 35c tyres



EXCEED 30 DISC



EXCEED 20 DISC



EXCEED 10 DISC

CLASSIC

The Apollo Classic Series draws from our heritage to reinvent our original Mark bikes and add a modern-day flair to retro frames. Combining classic good looks with contemporary components, these bikes bring style and comfort to every ride.

Classic style commuter frames

Hi-Ten steel traditional fork

700 x 38-42c tyres for smooth rolling comfort



MARK III



MARK III WS



MARK II



MARK II WS



TRANSFER

RAIL TRAIL SERIES

TRANSFER 30

700C RAIL TRAIL - 3 X 9 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Charcoal / Matte Black / Matte Red	18085	18086	18087	18088

SPECIFICATIONS

FRAME	Triple butted 6061 frame with smooth welding. Integrated head tube, pannier mounts and replaceable derailleur hanger.	HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	CHAIN	KMC Z-9
FORK	RST Nova ML suspension fork, 60mm travel with lockout and preload. Alloy crown with alloy lowers	CRANKSET	Shimano FC-T3010 48 x 36 x 26T L: S/M=170mm, L/XL=175mm	BRAKES	Promax DSK-923 hydraulic disc brakes with reach adjust, 160mm rotors
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm, sweep: 6°	PEDALS	Low profile high impact resin	TYRES	Veetire Rail, 700 x 40c
GRIP	Kraton ERGO comfort grip	F. DERAILLEUR	Shimano FD-T3000	SADDLE	Apollo Ergotech dual density saddle
		R. DERAILLEUR	Shimano RD-T3000	SEATPOST / CLAMP	Alloy twin bolt micro adjust 27.2mm
		SHIFT LEVERS	Shimano SL-M2000 Altus 3 x 9 speed	EXTRAS	N/A
		CASSETTE	Shimano 9 speed cassette 11-32T		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRANSFER 20

700C RAIL TRAIL - 3 X 8 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Charcoal / Matte Black	18089	18090	18091	18092

SPECIFICATIONS

FRAME	6061 butted alloy frame with integrated head tube, pannier mounts and replaceable derailleur hanger	CRANKSET	Suntour XCE 48 x 38 x 28T L: S/M=170mm, L/XL=175mm	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	RST Neon ML suspension fork, 60mm travel with lockout and preload, alloy crown with alloy lowers	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann X-M1 double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm wide, sweep: 6°	F. DERAILLEUR	Shimano FD-TY710	SADDLE	Apollo Ergotech dual density saddle
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano RD-TX800 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	EXTRAS	N/A
		CASSETTE	Shimano 8 speed cassette 12-32T		
		CHAIN	KMC Z-7		

TRANSFER 10

700C RAIL TRAIL - 3 X 7 SPEED



CODES	S	M	L	XL
Matte Charcoal / Matte Black / Matte Lime	18096	18097	18098	18099
Matte Charcoal / Matte Black / Matte White	18100	18101	18102	18103

SPECIFICATIONS

FRAME	6061 butted alloy frame, pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L=170mm	CHAIN	KMC Z-51
FORK	Suntour M3010 suspension fork, 700c, 50mm travel, alloy crown and lowers	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact nylon	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HANDLEBAR	Low riser, bore: 31.8mm, W:600mm, sweep: 6°	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Apollo Ergotech dual density saddle
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC

TRANSFER 10 WS

700C WOMEN'S RAIL TRAIL - 3 X 7 SPEED



RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	XS	S	M
Matte Charcoal / Matte Black / Matte Pink	18104	18105	18106
Matte Charcoal / Matte Black / Matte Blue	18107	18108	18109

SPECIFICATIONS


FRAME	6061 butted alloy women's specific frame, pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L=170mm	CHAIN	KMC Z-51
FORK	Suntour M3010 suspension fork, 700c, 50mm travel, alloy crown and lowers	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact nylon	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HANDLEBAR	Low riser, bore: 31.8mm, W: 580mm, sweep: 6°	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Apollo women's specific Ergotech saddle
HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



TRACE

URBAN SERIES

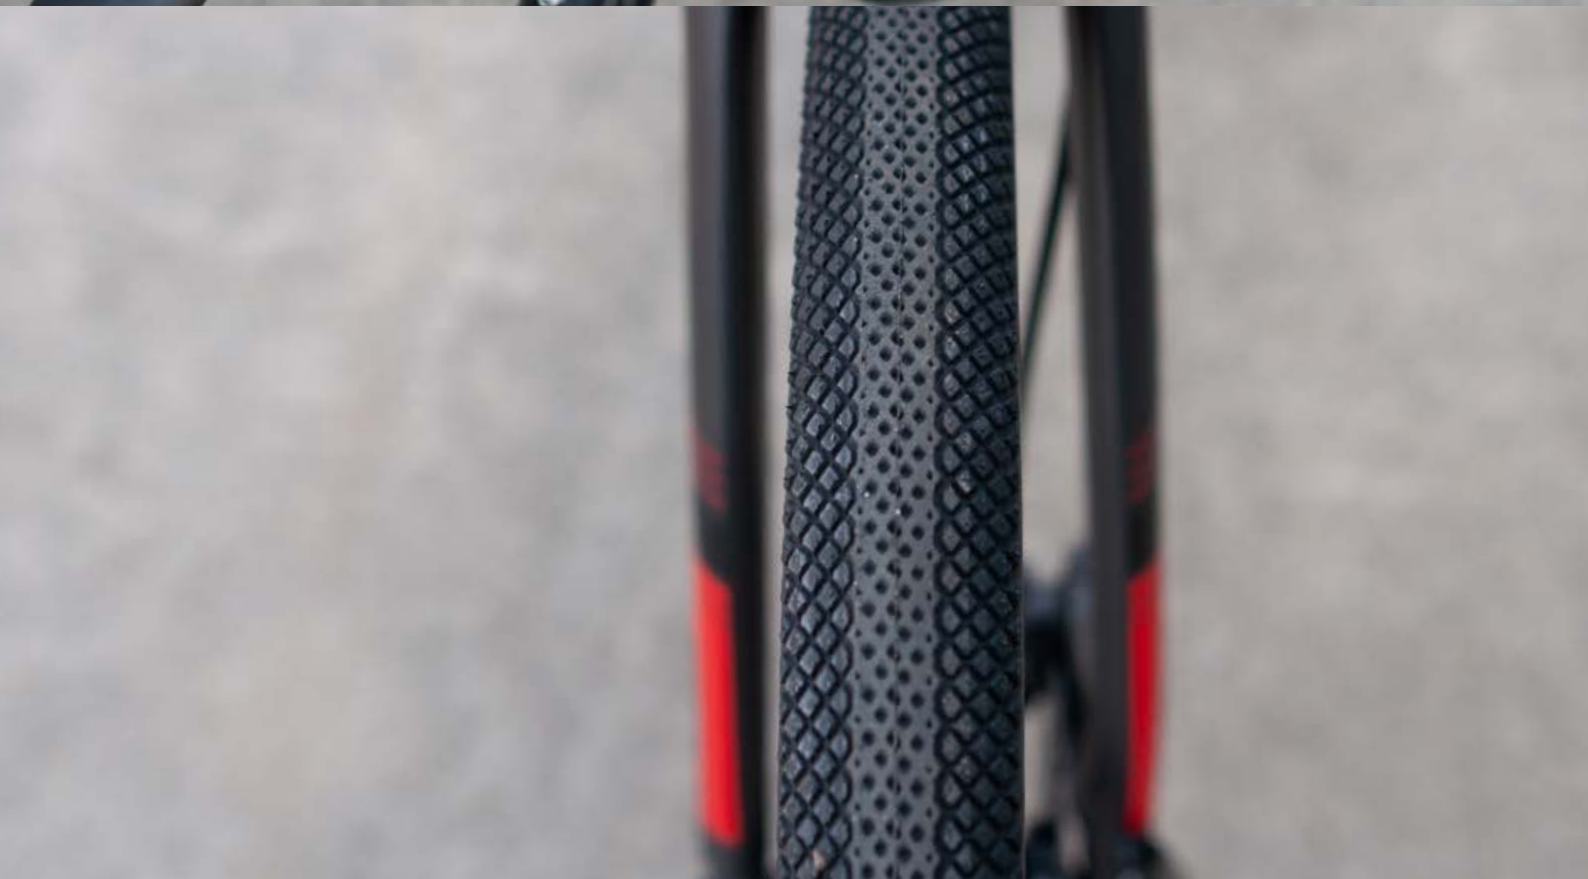

TRACE 30

700C CITY - 3 X 9 SPEED



RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC

CODES	M	L	XL
Matte Charcoal / Matte Black / Matte Red	18061	18062	18063

SPECIFICATIONS

FRAME	Triple butted 6061 frame with smooth welding. Integrated head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	Shimano FC-T3010 48 x 36 x 26T L: S/M=170mm, L/XL=175mm	BRAKES	Tektro HD-T275 hydraulic disc brakes, with 3 finger levers and 160mm rotors
FORK	Alloy 700c disc specific commuter fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Veetire Speedster 700 x 40c with reflective side walls
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm, sweep: 6°	F. DERAILLEUR	Shimano FD-T3000	SADDLE	Apollo Ergotech dual density saddle
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano RD-T3000	SEATPOST / CLAMP	Alloy twin bolt micro adjust 27.2mm
HEADSTEM	4 bolt alloy stem, 31.8mm, S=75mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano SL-M2000 Altus 3 x 9 speed	EXTRAS	N/A
		CASSETTE	Shimano 9 speed cassette 11-32T		
		CHAIN	KMC Z-9		

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Charcoal / Matte Black	18064	18065	18066	18067

SPECIFICATIONS

FRAME	6061 butted alloy frame with integrated head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	Suntour XCE 48 x 38 x 28T L: S/M=170mm, L/XL=175mm	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	700c disc specific hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Kenda Urban sport 700 x 38c wire bead
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm, sweep: 6°	F. DERAILLEUR	Shimano FD-TY710	SADDLE	Apollo Ergotech dual density saddle
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano RD-TX800 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	EXTRAS	N/A
		CASSETTE	Shimano 8 speed cassette 12-32T		
		CHAIN	KMC Z-7		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRACE 20 WS

700C WOMEN'S CITY - 3 X 8 SPEED

WS
women's specific

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	XS	S	M
Matte Charcoal / Matte Black / Matte Turquoise	18068	18069	18070

SPECIFICATIONS

FRAME	6061 butted alloy women's specific frame with integrated head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	Suntour XCE 48 x 38 x 28T L: XS/S/M=170mm	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	700c disc specific hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Kenda Urban sport 700 x 38c wire bead
HANDLEBAR	Alloy low riser, bore: 31.8mm, W:580mm, sweep 6°	F. DERAILLEUR	Shimano FD-TY710	SADDLE	Apollo women's specific Ergotech saddle
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano RD-TX800 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	EXTRAS	N/A
		CASSETTE	Shimano 8 speed cassette 12-32T		
		CHAIN	KMC Z-7		

TRACE 10

700C CITY - 3 X 7 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Charcoal / Matte Black / Matte Lime	18071	18072	18073	18074
Matte Charcoal / Matte Black / Matte White	18075	18076	18077	18078

SPECIFICATIONS

FRAME	6061 butted alloy frame, pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L: S/M/L/XL=170mm	CHAIN	KMC Z-51
FORK	700c hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact nylon	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HANDLEBAR	Low riser, bore: 31.8mm, W:600mm, sweep: 6°	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban sport 700 x 38c wire bead
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Apollo Ergotech dual density saddle
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRACE 10 WS

700C WOMEN'S CITY - 3 X 7 SPEED

WS
women's specific

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	XS	S	M
Matte Charcoal / Matte Black / Matte Pink	18079	18080	18081

SPECIFICATIONS

FRAME	6061 butted alloy women's specific frame, pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L: XS/S/M=170mm	CHAIN	KMC Z-51
FORK	700c hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact nylon	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HANDLEBAR	Low riser, bore: 31.8mm, W: 580mm, sweep: 6°	F. DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban sport 700 x 38c wire bead
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Apollo women's specific Ergotech saddle
HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

EXCEED DISC

LIGHTWEIGHT SPEED



**Designed for fitness enthusiasts,
dedicated commuters, and riders
looking for speed and performance
on a light weight flat-bar.**

Superlite butted alloy frame with Apollo's endurance road DNA, paired with a tapered head tube for stiffness and control.

A lightweight carbon fork on all models, delivering strength and speed.

Clearance for wider tyres; balancing performance with rider comfort.

Lighter and more compact flat mount disc brakes on all Exceed Disc models offer superior braking for all riding conditions.

Mudguard mounts adapt the bike for riding in all seasons.



2019-20 MODELS
32-35c tyres

2018 MODEL
28c tyres

EXCEED^{DISC}

RANGE OVERVIEW



EXCEED 30 DISC

- Lightweight alloy frame with carbon fork
- 2 x 10 full Tiagra shifting + derailleurs
- Tektro hydraulic brakes



EXCEED 20 DISC

- Lightweight alloy frame with carbon fork
- 2 x 9 Ez Fire shifting with Acera
- Tektro mechanical brakes



EXCEED 10 DISC

- Lightweight alloy frame with carbon fork
- 3 x 8 Ez Fire shifting
- Tektro mechanical brakes

EXCEED 30 DISC

700C COMMUTER DISC - 2 X 10 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	M	L	XL
Matte black / gloss black / gloss charcoal	19015	19016	19017

SPECIFICATIONS

FRAME	Superlite butted 6061 aluminium frame with integrated head tube, pannier mounts and replaceable forged derailleur hanger	CRANKSET	Shimano FC-CX50 46 x 36T L: S/M=170mm, L/XL=175mm	BRAKES	Tektro HD-R290 hydraulic disc brakes, flat mount with 3 finger levers and 160mm rotors
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c custom Weinmann U-26 32 hole double wall A/V rims, alloy disc hubs and stainless spokes.
HEADSET	A-head semi integrated 1-1/8" tapered with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Veetire Easy Street, 700 x 32c wire bead
HANDLEBAR	Alloy flat bar, bore: 25.4mm, W: 600mm, sweep: 5°	F. DERAILLEUR	Shimano FD-4700 Tiagra	SADDLE	Apollo contoured saddle
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano RD-4700 Tiagra	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
HEADSTEM	Alloy 4 bolt stem, bore: 31.8mm L: S=75mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano Tiagra Ez Fire 2 x 10 speed	EXTRAS	N/A
		CASSETTE	Shimano 10 speed cassette 11-32T		
		CHAIN	KMC X-10		

EXCEED 20 DISC

700C COMMUTER DISC - 2 X 9 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Black / Charcoal / Blue	20035	20036	20037	20038

SPECIFICATIONS

FRAME	Superlite butted 6061 aluminium frame with integrated head tube, internal cable routing, pannier mounts and replaceable forged derailleur hanger	HEADSTEM	Alloy 4 bolt stem, bore: 31.8mm L: S=75mm, M/L=90mm, XL=105mm	CASSETTE	Shimano 9 speed cassette 11-32T
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	CRANKSET	Shimano FC-MT210 46 x 30T L: S/M=170mm, L/XL=175mm	CHAIN	KMC Z-9
HEADSET	A-head semi integrated 1-1/8" tapered with 10mm cone spacer	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Tektro C550 mechanical disc brakes, flat mount with 160mm rotors
HANDLEBAR	Alloy flat bar, bore: 31.8mm, W: 600mm, sweep: 5°	PEDALS	Low profile high impact resin	WHEELS	700c custom Weinmann U-26 32 hole double wall A/V rims, alloy disc hubs and stainless spokes
GRIP	Kraton ERGO comfort grip	F. DERAILEUR	Shimano FD-T3000 Acera	TYRES	Veetire Zilent, 700 x 35c wire bead
		R. DERAILEUR	Shimano RD-T3000 Acera	SADDLE	Apollo contoured saddle
		SHIFT LEVERS	Shimano SL-M3000 2 x 9 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
				EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

EXCEED 10 DISC

700C COMMUTER DISC - 3 X 8 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte charcoal / black / red	19022	19023	19024	19025

SPECIFICATIONS

FRAME	Superlite butted 6061 aluminium frame with integrated head tube, pannier mounts and replaceable forged derailleur hanger	CRANKSET	Suntour XCE crank with 48 x 38 x 28T L: S/M=170mm, L/XL=175mm	CHAIN	KMC Z-7
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Tektro Lyra mechanical disc brakes, flat mount with 160mm rotors
HEADSET	A-head semi integrated 1-1/8" tapered with 10mm cone spacer	PEDALS	Low profile high impact resin	WHEELS	700c custom Weinmann U-26 32 hole double wall A/V rims, alloy disc hubs and stainless spokes.
HANDLEBAR	Alloy flat bar, bore: 31.8mm, W: 580mm, sweep: 5°	F. DERAILLEUR	Shimano FD-TY710 top pull for 31.8mm	TYRES	Veetire Easy Street, 700 x 32c wire bead
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano RD-TX800 8 speed	SADDLE	Apollo contoured saddle
HEADSTEM	Alloy 4 bolt stem, bore: 31.8mm L: S=75mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano ST-EF510 Ez Fire 3 x 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	N/A

MARK

MEN'S





CODES	M	L	XL
Gloss Navy Blue / Gloss Cream / Gloss Orange	17091	17092	17093

SPECIFICATIONS

FRAME	Alloy 6061 frame with rack and fender mounts	CRANKSET	Cold forged High polish 38T alloy crank with guard L: 170mm	CHAIN	KMC Z-610
FORK	700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head threadless 1-1/8"	PEDALS	High impact dual compound resin	WHEELS	700c double wall alloy rims. 32 hole A/V, alloy hubs with double seal system. Stainless spokes
HANDLEBAR	Alloy low riser, bore: 25.4mm, W: 580mm, sweep: 6°	F. DERAILLEUR	N/A	TYRES	700 x 42c wire bead
GRIP	Leather look tape grip	R. DERAILLEUR	3 speed internal hub gears	SADDLE	Classic series saddle with brass rivets
HEADSTEM	Alloy 2 bolt stem, 25.4mm, S/M=90mm, L/XL=105mm	SHIFT LEVERS	Shimano Nexus shift 3 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 18T freewheel	EXTRAS	Alloy full length front and rear mudguards, alloy pannier rack, alloy front rack



MARK II

700C STEEL CLASSIC - 1 X 8 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Gloss Slate / Gloss Sky Blue / Gloss Red	17094	17095	17096	17097

SPECIFICATIONS

FRAME	Hi tensile disc specific commuter frame with rack and fender mounts	CRANKSET	Cold forged 44T crank with double chain cover L: 170mm	CHAIN	KMC Z-7
FORK	700c Hi-ten disc specific 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Promax APD-3.0 mechanical disc brakes with 160mm rotors
HEADSET	A-head threadless 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HANDLEBAR	Alloy low riser, bore: 25.4mm, W: 580mm, sweep: 6°	F. DERAILLEUR	N/A	TYRES	700 x 40c wire bead
GRIP	Leather look tape grip	R. DERAILLEUR	Shimano Acera 8 speed	SADDLE	Classic series saddle with brass rivets
HEADSTEM	Alloy 2 bolt stem, 25.4mm, S/M=90mm, L/XL=105mm	SHIFT LEVERS	Shimano Acera Rapid fire 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	Alloy full length front and rear mudguards

MARK

WOMEN'S



MARK III WS

700C ALLOY CLASSIC - 1 X 3 SPEED IGH

WS
women's specific



RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC

CODES	S	M
Purple / Silver / Blue	18110	18111

SPECIFICATIONS

FRAME	Alloy 6061 city frame with rack and fender mounts	CRANKSET	Cold forged 44T crank with double chain cover L: 170mm	CHAIN	KMC Z-610
FORK	700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c double wall alloy rims. 32 hole A/V, alloy hubs with double seal system. Stainless spokes
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm, Sweep 43°	F. DERAILLEUR	N/A	TYRES	700 x 42c wire bead
GRIP	Kraton gel dual density comfort grip	R. DERAILLEUR	3 speed internal hub gears	SADDLE	Classic series saddle with brass rivets
HEADSTEM	Alloy quill stem	SHIFT LEVERS	Shimano Nexus shift 3 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 18T freewheel	EXTRAS	Alloy full length front and rear mudguards, alloy pannier rack, alloy front rack

MARK II WS

700C STEEL CLASSIC - 1 X 7 SPEED

WS
women's specific

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M
Peach / Navy Blue / Sky Blue	18112	18113

SPECIFICATIONS

FRAME	Hi tensile city frame with rack and fender mounts	CRANKSET	Cold forged 44T crank with double chain cover L: 170mm	CHAIN	KMC Z-51
FORK	700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c double wall alloy rims. 32 hole A/V, alloy hubs with double seal system. Stainless spokes
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm, Sweep 43°	F. DERAILLEUR	N/A	TYRES	700 x 42c wire bead
GRIP	Kraton gel dual density comfort grip	R. DERAILLEUR	Shimano RD-TY500	SADDLE	Classic series saddle with brass rivets
HEADSTEM	Alloy quill stem	SHIFT LEVERS	Shimano Revoshift 7 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-34T freewheel	EXTRAS	Alloy full length front and rear mudguards

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

LIFESTYLE



EON 20 SERIES



RELAX AND RIDE

Shimano's most affordable yet lightest e-bike system yet, the E5000 is specifically designed to lend a helping hand to urban commutes. Whether it's cycling to work, riding the kids to school, picking up groceries or going for a spin with your friends, the E5000 offers the ideal level of support to silently boost your day-to-day activities – thanks to its integrated drivetrain and fully customisable power-assist. Elegantly built for pure comfort and relaxation.

Natural riding feeling

Smooth and silent ergonomic components and intuitive pedal-assist make biking a breeze. While its street-smart attitude helps you navigate nimbly around corners and unexpected obstacles.

Compact and lightweight

The small motor packs a punch, weighs next to nothing and blends in discreetly with the frame.


Long range

Explore the world, trusting your bike will always get you home. It goes up to 185km* on a single charge – while preserving your energy. Let the chain take the strain – and get a boost when you need it most.

* In Eco-mode


Battery life

1000 charges later, your battery will still be going strong. And will always get you there... and back.

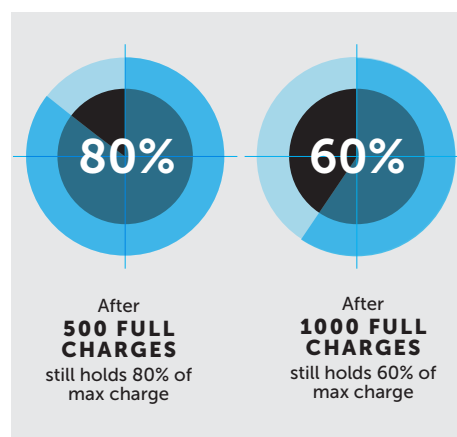

Smartphone connectivity

Wirelessly connect your smartphone to customise your ride to the max – and turn it into a cycle computer – using our Shimano E-TUBE RIDE app. Choose what you view – speed, mileage, mode and more – and how you view it. You'll have all the data at your fingertips.

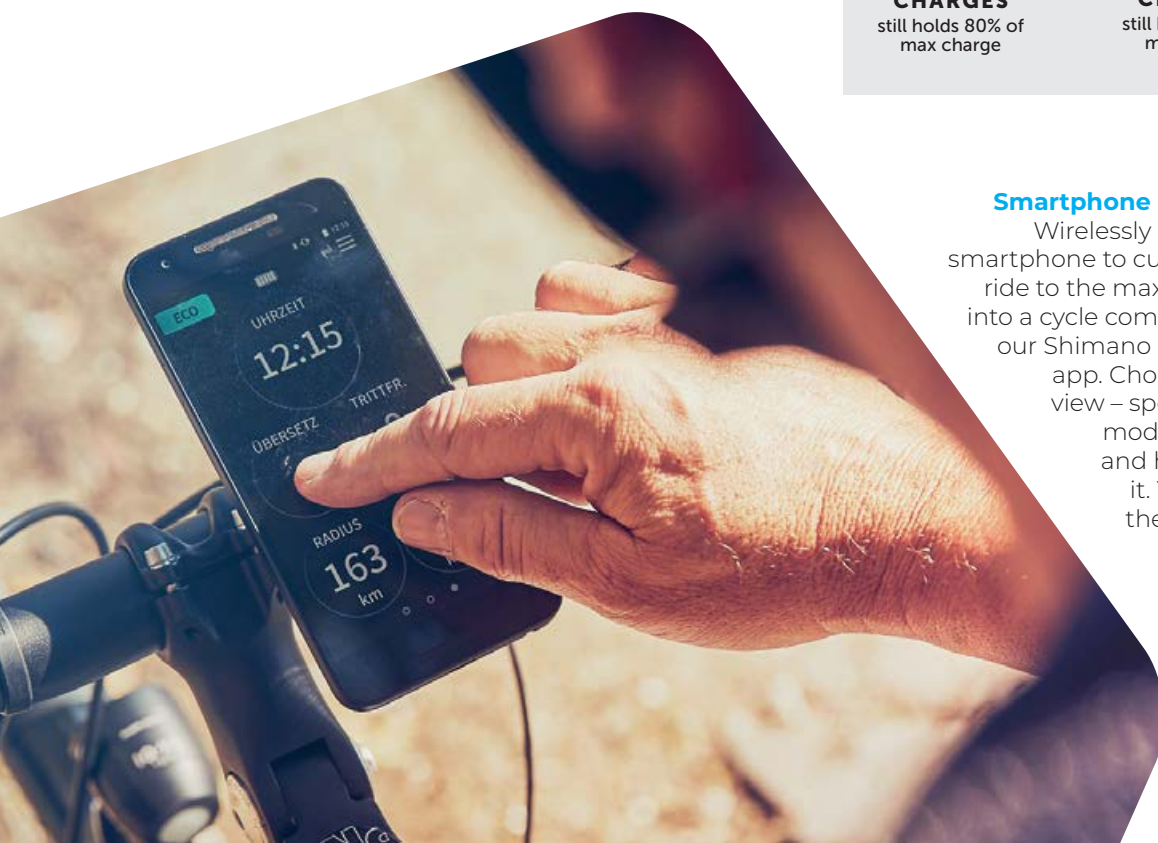

SPECIFICATIONS



Drive unit DU-E5000

- Nominal output: 250W
- Maximum torque: 40Nm
- Optimised pedalling efficiency
- Weight: 2.5kg
- Walk assist



Down tube / rear carrier battery

- Battery life: 60% capacity after 1000 charge cycles
- Long lasting battery:
BT-E6010 418Wh (downtube) /
BT-E6000 418Wh (rear carrier)




Switch unit SW-E7000

- Simple intuitive operation with clearly defined pressure points
- Small, compact and slim on the handlebars



Cycle computer SC-E7000

- Bluetooth LE / ANT private
- 3.5cm (1.39 inch) monochrome display
- Outstanding readability
- Attaches to the handlebar
- Wide range of cycle computer functions

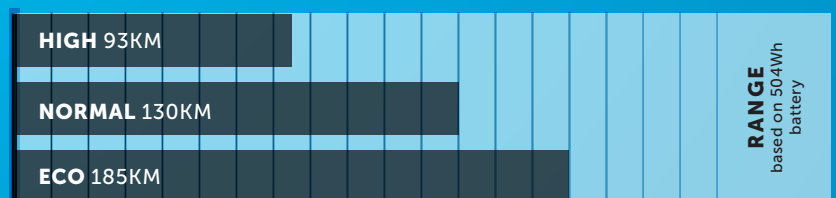

Based on Shimano original test results: flat paved road with riding speed of 23km/h and rider weight of 80kg

EON COMMUTER 20

700C COMMUTING E-BIKE 1 X 9 SPEED

E-BIKE

HYBRID



CODES

Matte Charcoal / Black

ONE SIZE FITS MOST

20046

SPECIFICATIONS

FRAME	6061 alloy commuting geometry frame, designed for Shimano STEPS power assist system	CRANKSET	Shimano STEPS E5000, Power Assist E-Bike System	CHAIN	KMC Z-99
FORK	RST Volant hydraulic lockout, 80mm Travel	BOTTOM BRACKET	Shimano STEPS, Power Assist E-Bike System	BRAKES	Shimano BR-T445 hydraulic disc brakes with 160mm rotors
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c Weinmann X-M1 double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HANDLEBAR	Alloy comfort bars, R: 40mm, W: 610mm, Sweep 43°	F. DERAILLEUR	N/A	TYRES	Veetire Speedster, 29 x 2.1 wire bead
GRIP	Kraton ERGO comfort grip	R. DERAILLEUR	Shimano RD-T4000 9 speed	SADDLE	Apollo Ergotech dual density saddle
HEADSTEM	4 bolt alloy stem, ext=90mm	SHIFT LEVERS	Shimano Altus 9 speed Rapid Fire	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 9 speed cassette 11-32T	EXTRAS	Shimano STEPS battery mounted on the D/T

TANDEM

EON COMFORT 20

700C LOW STEP THROUGH E-BIKE 1 X 9 SPEED

E-BIKE

HYBRID

TANDEM



CODES

Gloss White / Slate

ONE SIZE FITS MOST

20047

SPECIFICATIONS

FRAME	6061 alloy low step through "Comfort zone" geometry frame with optimised step through clearance and snake stays, designed for Shimano STEPS power assist system	CRANKSET	Shimano STEPS E5000, Power Assist E-Bike System	CHAIN	KMC Z-99
FORK	RST Volant hydraulic lockout, 80mm Travel	BOTTOM BRACKET	Shimano STEPS, Power Assist E-Bike System	BRAKES	Shimano BR-T445 hydraulic disc brakes with 160mm rotors
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c Weinmann X-M1 double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HANDLEBAR	Alloy comfort bars, R: 40mm, W: 610mm, Sweep 43°	F. DERAILLEUR	N/A	TYRES	Veetire Easy Street, 700 x 47c wire bead
GRIP	Kraton gel dual density comfort grip	R. DERAILLEUR	Shimano RD-T4000 9 speed	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy adjustable A-head stem	SHIFT LEVERS	Shimano Altus 9 speed Rapid Fire	SEATPOST / CLAMP	Alloy suspension post with elastomer, 27.2mm
		CASSETTE	Shimano 9 speed cassette 11-32T	EXTRAS	Shimano STEPS carry mount battery

EON 10 SERIES



Motor

This rear-drive motor, which has a rated power of 250W, a reduction ratio of 1: 5 and a maximum torque of 45 N.m, provides ideal power for vehicles. Strong and efficient, this motor greatly enhances riding comfort and is suitable for touring bikes, commuter bikes and mountain bikes.

CORE DATA

Position	Rear Motor
Construction	Gear drive
Rated Voltage (DCV)	36/43/48
n0 (Rpm)	325 ; 245
Rated Power (W)	250
nT(Rpm)	290 ; 205
Max Torque	45 N.m
Efficiency (%)	≥ 80
Color	Black
Weight (kg)	3.3
Noise Grade (dB)	< 55
Operating Temperature	-20 - 45°C

Display

The BAFANG HMI with a high-contrast LCD display delivers all important information at a glance and can also be read in direct sunlight without difficulty. The operating of the overall system is integrated into the HMI and does not require an additional handlebar controller. The additional output can be individually controlled by three support levels. The user interface is clearly legible and intuitive to use. The HMI is dust and water resistant and complies with protection class IP 65.

Indication Information

Current Speed (km/h)	Yes
Maximum Speed (km/h)	Yes
Average Speed (km/h)	Yes
Single Duration Trip	Yes
Single Distance Trip	Yes
Total Distance	Yes
Reset S.T. Duration	No
Reset S.T. Distance	No
Capacity	Yes
Walk Boost	Yes
Backlight	Yes

Connectivity

Bluetooth	No
USB Charge	No
USB Communication	No

The Apollo Eon 10 models are powered by BAFANG's e-bike system, renowned throughout Europe and America for their high quality and innovative technology.



Battery

Core Data	
Rated Voltage (DCV)	43
Nominal Capacity (Ah)	10.4
Base Parameter	
Energy Content (Wh)	450
Cell	SDI-2.6 Ah
BMS	Smart BMS
Voltage Scope (V)	36 - 49.2
Internal Resistance (mΩ)	< 240
Charge mode	CC-CV (Special 5P Charger)
Continuous Charge Current (A)	2-4
Charging time	6.5h with 2A Charger
Max Continuous Discharge Current (A)	18
Consumption Rate - Work	≤ 10mA
Consumption Rate - Sleep	≤ 400uA
Consumption Rate - Deep Sleep	50 uA
Operation Temperature - Charge	0° - 45°
Operation Temperature - Discharge	-20° - 60°
Storage (At 35% SoC & -10 ~ 35°C)	6 Months
Cycle Life	500 (60% SoC (@ 20±5°C, Charge @ 0.2C and discharge @ 0.5C))

EON COMMUTER 10

700C COMMUTING E-BIKE 3 X 8 SPEED

E-BIKE

HYBRID



CODES

Matte Black / Red

ONE SIZE FITS MOST

20048

SPECIFICATIONS

FRAME	6061 alloy commuting geometry frame, designed for BAFANG power assist system	CRANKSET	Suntour XCE 48 x 38 x 28T L: =170mm	CHAIN	KMC Z-7
FORK	RST NOVA ML, mechanical lockout, 60mm travel	BOTTOM BRACKET	BAFANG, square taper with Power Assist speed sensor	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c Weinmann U-26 double wall rims, 32 hole A/V, front alloy disc hub with QR, rear Bafang power assist hub motor, stainless spokes
HANDLEBAR	Alloy riser bars, R: 15mm, W: 600mm, Sweep 5°	F. DERAILLEUR	Shimano FD-TY710	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
GRIP	Kraton gel dual density comfort grip	R. DERAILLEUR	Shimano RD-TX800 8 speed	SADDLE	Apollo Ergotech dual density saddle
HEADSTEM	Alloy A-head stem	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	BAFANG carry mount battery

TANDEM

EON COMFORT 10

700C LOW STEP THROUGH E-BIKE 3 X 8 SPEED

E-BIKE

HYBRID

TANDEM



CODES

Gloss Slate / Chrome

ONE SIZE FITS MOST

20049

SPECIFICATIONS

FRAME	6061 alloy low step through "Comfort zone" geometry frame with optimised step through clearance and snake stays, designed for BAFANG power assist system	CRANKSET	Suntour XCE 48 x 38 x 28T L: =170mm	CHAIN	KMC Z-7
FORK	RST NOVA ML, mechanical lockout, 60mm travel	BOTTOM BRACKET	BAFANG, square taper with Power Assist speed sensor	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c Weinmann U-26 double wall rims, 32 hole A/V, front alloy disc hub with QR, rear Bafang power assist hub motor, stainless spokes
HANDLEBAR	Alloy riser bars, R: 15mm, W: 600mm, Sweep 5°	F. DERAILLEUR	Shimano FD-TY710	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
GRIP	Kraton gel dual density comfort grip	R. DERAILLEUR	Shimano RD-TX800 8 speed	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy A-head stem	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	BAFANG carry mount battery



CODES	XS	S	M
Gloss silver / charcoal / blue	19026	19027	19028

SPECIFICATIONS

FRAME	6061 butted alloy women's step through "Comfort zone" geometry frame with optimised step through clearance and snake stays	CRANKSET	Alloy crank with 48 x 38 x 28T L: 170mm	CHAIN	KMC Z-7
FORK	Apollo suspension fork with 30mm travel with preload and lockout. Alloy crown and lowers.	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	TPR two tone non-slip	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release front and nutted rear hubs. Stainless spokes
HANDLEBAR	Alloy comfort bars, R: 66mm, W: 610mm, Sweep 43°	F. DERAILLEUR	Shimano TX-51 top pull for 31.8mm	TYRES	Kenda 700 x 38c wire bead
GRIP	Kraton gel dual density comfort grip	R. DERAILLEUR	Shimano RD-TX800	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy adjustable quill stem	SHIFT LEVERS	Shimano EF-510 Ez Fire 24 speed	SEATPOST / CLAMP	Alloy suspension post with elastomer, 27.2mm
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	Alloy kickstand

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



E-BIKE

HYBRID

TANDEM

CODES	S	M	L	XL
Gloss charcoal / black / silver	19029	19030	19031	19032

SPECIFICATIONS

FRAME	6061 butted alloy "Comfort zone" geometry frame with snake stays	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
FORK	Apollo suspension fork with 30mm travel with preload, alloy crown and legs	PEDALS	Comfort non-slip with rubber insert	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release front and nutted rear hubs. Stainless spokes
HEADSET	Threaded semi-sealed 1-1/8"	F. DERAILLEUR	Shimano TX-51 top pull for 31.8mm	TYRES	Kenda 700 x 38c wire bead
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm, Sweep 43°	R. DERAILLEUR	Shimano RD-TY500	SADDLE	Apollo Comfortech
GRIP	Kraton gel dual density comfort grip	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy suspension post with elastomer, 272mm
HEADSTEM	Alloy adjustable quill stem	CASSETTE	Shimano HG20 7 speed cassette 12-28T	EXTRAS	Alloy kickstand
CRANKSET	Alloy crank with 48 x 38 x 28T L: 170mm	CHAIN	KMC Z-51		

SHORELINE WS

700C WOMEN'S HYBRID - 3 X 7 SPEED



E-BIKE

HYBRID



CODES	XS	S	M
Gloss slate blue / silver / navy blue	19033	19034	19035
Gloss Lavender / White / Charcoal	20043	20044	20045

SPECIFICATIONS

FRAME	6061 butted alloy women's step through "Comfort zone" geometry frame with optimised step through clearance and snake stays	CRANKSET	Alloy crank with 48 x 38 x 28T L: 170mm	CHAIN	KMC Z-51
FORK	Apollo suspension fork with 30mm travel with preload, alloy crown and legs	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	Comfort non-slip with rubber insert	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release front and nutted rear hubs. Stainless spokes
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm, Sweep 43°	F. DERAILLEUR	Shimano TX-51 top pull for 31.8mm	TYRES	Kenda 700 x 38c wire bead
GRIP	Kraton gel dual density comfort grip	R. DERAILLEUR	Shimano RD-TY500	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy adjustable quill stem	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy suspension post with elastomer, 272mm
		CASSETTE	Shimano HG20 7 speed cassette 12-28T	EXTRAS	Alloy kickstand

TANDEM



E-BIKE

HYBRID

TANDEM



CODES	XS	S	M
Gloss blue / white / slate	19039	19040	19041

SPECIFICATIONS

FRAME	6061 butted alloy women's step through "Comfort zone" geometry frame with optimised step through clearance and snake stays	CRANKSET	Alloy crank with 44T single chainwheel with double chain guide L: 170mm	CHAIN	KMC Z-51
FORK	700c rigid hi-tensile steel	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	Comfort non-slip with rubber insert	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release front and nutted rear hubs. Stainless spokes
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm, Sweep 43°	F. DERAILLEUR	N/A	TYRES	Kenda 700 x 38c wire bead
GRIP	Kraton comfort grip	R. DERAILLEUR	Shimano Tourney 7 speed	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy adjustable quill stem	SHIFT LEVERS	Shimano Revoshift 7 speed.	SEATPOST / CLAMP	Alloy 27.2mm micro adjust with alloy clamp
		CASSETTE	Shimano 7 speed 14-34T freewheel	EXTRAS	Alloy kickstand

SYNCRO 700

700C 3 X 9 SPEED TANDEM

E-BIKE

HYBRID



CODES

Gloss White / Gloss Slate / Gloss
Lime

ONE SIZE FITS MOST

16273

SPECIFICATIONS

FRAME	Double diamond design tandem frame with eccentric bottom bracket	CRANKSET	(Timing cranks) 3/32x39T 170mm alloy crank, (Rear) alloy 44/32/22T	BRAKES	Tektro MD-M500 mechanical disc brakes with 160mm rotors
FORK	Oversized 700c 1-1/8 full Cro-mo rigid straight blade fork, disc brake mounts	BOTTOM BRACKET	Front: Eccentric bottom bracket, Rear: Sealed cartridge	WHEELS	700c Weinmann U-26 alloy double wall disc F/V rims with eyelets, 36 hole, anodised disc hubs and stainless spokes
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	PEDALS	Low profile high impact resin	TYRES	Veetire Speedster 27TPI, 700 x 40c, wire bead
HANDLEBAR	Front: alloy low rise bar, W: 600mm, Bore: 31.8mm, Sweep: 6°. Rear: alloy flat bar, W: 600mm, Bore: 31.8mm	F. DERAILLEUR	Shimano M370 Altus 9 speed, top pull for 31.8mm	SADDLE	Apollo dual density MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	R. DERAILLEUR	Shimano RD-T4000	SEATPOST / CLAMP	Alloy 27.2mm micro adjust twin bolt post with alloy clamp
HEADSTEM	Front: alloy 31.8mm A-head stem L=100mm. Rear: Adjustable length 31.8mm alloy stem R: 35mm, 155mm-200mm adjustment	SHIFT LEVERS	Shimano Altus Ez Fire 27 speed	EXTRAS	N/A
		CASSETTE	Shimano HG20 9 speed cassette 11-32T		
		CHAIN	KMC Z-99		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TANDEM



CODES

Matte Black / Orange / Turquoise

20137

SPECIFICATIONS

FRAME	6061 24" disc specific aluminium gusseted MTB frame. 50mm bi-oval top and down tubes, snake stays	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	Suntour XCT-JR-L-DS-24, alloy crown and lowers, coil sprung, 80mm travel	PEDALS	Low profile high impact nylon	WHEELS	24" Weinmann X-M1 alloy 32 hole disc specific rims. Alloy quick release hubs with cassette rear, stainless spokes
HEADSET	Semi-sealed 1-1/8" Integrated A-head	F. DERAILLEUR	Shimano FD-M315	TYRES	24 x 1.95"
HANDLEBAR	Riser bar. W: 640mm	R. DERAILLEUR	RD-M310 Altus	SADDLE	Selle Royal kids specific
GRIP	Kraton grips	SHIFT LEVERS	Shimano SL-M315	SEATPOST / CLAMP	Alloy micro adjust 27.2mm, with alloy QR clamp
HEADSTEM	A-head MTB stem with Rise: 6° Bore: 25.4mm, L: 75mm.	CASSETTE	Shimano 7 speed cassette 12-32T	EXTRAS	N/A
CRANKSET	Alloy 36 x 22T L: 152mm	CHAIN	KMC Z-7		



CODES

Matte Black / Blue / Silver	20138
Gloss Lime / Black / Blue	20139

SPECIFICATIONS

FRAME	Alloy butted 6061 24" frame with 50mm bi-oval down tube	BOTTOM BRACKET	Nutted bottom bracket	CHAIN	KMC Z-51
FORK	Suspension fork with 50mm travel with alloy crown and lowers	PEDALS	High impact nylon	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
HEADSET	Semi-sealed 1-1/8" A-head	F. DERAILLEUR	Shimano TZ-500	WHEELS	24" alloy 32 hole rims with alloy disc hubs and stainless spokes
HANDLEBAR	Low riser bar W: 560mm	R. DERAILLEUR	Shimano TY-300	TYRES	24 x 1.95"
GRIP	Kraton grips	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SADDLE	Selle Royal kids specific
HEADSTEM	A-head 2 Bolt MTB stem with Rise: 10° Bore: 25.4mm, L: 75mm.	CASSETTE	Shimano freewheel 7 speed 14-28T	SEATPOST / CLAMP	Alloy 27.2mm with alloy QR clamp
CRANKSET	Alloy 42 x 32 x 22T L: 152mm			EXTRAS	Kickstand

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



CODES

Matte Black / Lime / Turquoise	20140
Gloss Red / Black / Dark Red	20141

SPECIFICATIONS

FRAME	Alloy butted 6061 24" frame with 50mm bi-oval down tube	BOTTOM BRACKET	Nutted bottom bracket	CHAIN	KMC Z-51
FORK	40mm travel with pressed crown and alloy lowers	PEDALS	High impact nylon	BRAKES	Alloy linear pull brakes
HEADSET	Semi-sealed 1-1/8" threaded	F. DERAILLEUR	N/A	WHEELS	24" alloy 32 hole rims with nutted hubs stainless spokes
HANDLEBAR	Low riser bar W: 560mm	R. DERAILLEUR	Shimano TY-300	TYRES	24 x 1.95"
GRIP	Kraton grips	SHIFT LEVERS	Shimano Revoshift 7 speed rear	SADDLE	Selle Royal kids specific
HEADSTEM	Quill stem	CASSETTE	Shimano freewheel 7 speed 14-28T	SEATPOST / CLAMP	27.2mm with alloy QR clamp
CRANKSET	Alloy 36T with double chainguard L: 152mm			EXTRAS	Kickstand



CODES

Gloss Pink / White	20142
Gloss White / Lavender	20143

SPECIFICATIONS

FRAME	Butted alloy 6061 24" step through girls aluminium frame with snake stays	CRANKSET	Alloy 42 x 32 x 22T L: 152mm	CHAIN	KMC Z-51
FORK	Suspension fork with 50mm travel with alloy crown and lowers	BOTTOM BRACKET	Nutted bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
HEADSET	Semi-sealed 1-1/8" A-head	PEDALS	High impact nylon	WHEELS	24" alloy 32 hole rims with alloy disc hubs and stainless spokes
HANDLEBAR	Low riser bar W: 560mm	F. DERAILLEUR	Shimano TZ-500	TYRES	Semi-slick 24 x 1.75" dual tread
GRIP	Kraton grips	R. DERAILLEUR	Shimano TY-300	SADDLE	Selle Royal kids specific
HEADSTEM	A-head 2 Bolt MTB stem with Rise: 10° Bore: 25.4mm, L: 75mm.	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST / CLAMP	Alloy 27.2mm with alloy QR clamp
		CASSETTE	Shimano freewheel 7 speed 14-28T	EXTRAS	Kickstand



CODES

Gloss Lavender / White

20144

Gloss White / Pink

20145

SPECIFICATIONS

FRAME	Butted alloy 6061 24" step through girls aluminium frame with snake stays	CRANKSET	Alloy 36T with double chainguard L: 152mm	CASSETTE	Shimano freewheel 7 speed 14-28T
FORK	40mm travel with pressed crown and alloy lowers	BOTTOM BRACKET	Nutted bottom bracket	CHAIN	KMC Z-51
HEADSET	Semi-sealed 1-1/8" threaded	PEDALS	High impact nylon	BRAKES	Alloy linear pull brakes
HANDLEBAR	Low riser bar W: 560mm	F. DERAILLEUR	N/A	WHEELS	24" alloy 32 hole rims with nutted hubs and stainless spokes
GRIP	Kraton grips	R. DERAILLEUR	Shimano TY-300	TYRES	Semi-slick 24 x 1.75" dual tread
HEADSTEM	Quill stem	SHIFT LEVERS	Shimano Revoshift 7 speed rear	SADDLE	Selle Royal kids specific
				SEATPOST / CLAMP	27.2mm with alloy QR clamp
				EXTRAS	Kickstand

MOUNTAIN

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
TRAIL D 30	M	17	613	440	n/a	616	430	74.0°	105	68.5°	1170	443	24	51	551	148
TRAIL D 20	L	19.5	623	456	n/a	635	489	74.0°	115	68.5°	1189	443	24	51	551	148
TRAIL D 10	M	17	637	411	n/a	590	432	74.3°	120	67.0°	1174	450	39	51	554	148
	L	19	647	426	n/a	608	483	74.3°	130	67.0°	1193	450	39	51	554	148
	XL	20.5	656	441	n/a	625	521	74.3°	140	67.0°	1212	450	39	51	554	148
TRAIL 30	S	15	638	390	423	585	380	73.0°	110	68.5°	1113	440	45	51	550	141
	M	17	647	402	450	600	430	73.0°	120	68.5°	1132	440	45	51	550	141
	L	19.5	657	439	484	640	490	73.0°	130	68.5°	1173	440	45	51	550	141
TRAIL 20	S	15	609	399	423	585	380	73.0°	110	68.5°	1100	440	45	44	515	135
TRAIL 10	M	17	618	411	450	600	430	73.0°	120	68.5°	1121	440	45	44	515	135
	L	19.5	627	448	484	640	490	73.0°	130	68.5°	1163	440	45	44	515	135
COMP 30	S	15.5	609	404	420	590	400	73.0°	100	69.0°	1116	435	60	51	510	141
	M	17.5	618	421	443	610	440	73.0°	110	69.0°	1137	435	60	51	510	141
	L	19.5	627	438	476	630	500	73.0°	120	69.0°	1155	435	60	51	510	141
COMP 20	S	15.5	609	404	420	590	400	73.0°	100	69.0°	1116	435	60	51	510	135
COMP 10	M	17.5	618	421	443	610	440	73.0°	110	69.0°	1137	435	60	51	510	135
	L	19.5	627	438	476	630	500	73.0°	120	69.0°	1155	435	60	51	510	135
XPERT 20	S	15.5	590	395	417	575	400	73.0°	100	69.0°	1107	450	60	51	490	135
	M	17	599	412	435	595	430	73.0°	110	69.0°	1128	450	60	51	490	135
	L	19	618	414	466	615	480	72.0°	125	70.0°	1129	450	60	51	490	135
	XL	20.5	632	430	490	635	520	72.0°	140	70.0°	1149	450	60	51	490	135
	XXL	22	651	439	515	650	560	72.0°	160	70.0°	1165	450	60	51	490	135
XPERT 10	S	15.5	599	392	417	575	400	73.0°	100	69.0°	1102	450	60	51	500	135
	M	17	609	409	435	595	430	73.0°	110	69.0°	1123	450	60	51	500	135
	L	19	627	411	466	615	480	72.0°	125	70.0°	1123	450	60	51	500	135
	XL	20.5	642	427	490	635	520	72.0°	140	70.0°	1144	450	60	51	500	135
ASPIRE 30	XS	14	574	375	406	540	355	74.0°	110	69.0°	1062	440	45	42	475	135
ASPIRE 20	S	16	584	382	435	555	410	73.5°	120	69.0°	1073	440	45	42	475	135
ASPIRE 10	M	17.5	595	403	454	585	440	73.0°	130	69.5°	1092	440	45	42	475	135
	L	19	607	419	478	605	480	73.0°	140	70.0°	1108	440	45	42	475	135
	XL	21	618	435	505	630	530	72.5°	150	70.5°	1121	440	45	42	475	135
ASPIRE 30 WS	XS	14	584	373	382	540	355	74.0°	100	69.0°	1058	435	45	42	495	135
ASPIRE 20 WS	S	15.5	602	381	412	565	400	73.0°	115	70.0°	1061	435	45	42	495	135
ASPIRE 10 WS	M	17.5	616	397	437	585	440	73.0°	130	70.0°	1082	435	45	42	495	135
SUMMIT 10	XS	13	523	380	389	530	330	74.0°	100	70.0°	1035	430	35	38	435	135
	S	15	533	387	415	550	380	73.0°	110	70.0°	1051	430	35	38	435	135
SUMMIT 10 WS	XS	12	523	380	332	530	310	74.0°	100	70.0°	1035	430	35	38	435	135
	S	14	533	387	334	550	360	73.0°	110	70.0°	1051	430	35	38	435	135
STOUT 40	M	17	593	419		600	430	73.0°	110	69.0°	1148	455	60	51	483	190
	L	19	616	437		625	483	73.0°	130	70.0°	1170	455	60	51	483	190
STOUT 20	S	15	589	394	400	566	380	73.0°	100	69.0°	1103	455	60	51	483	197
	M	17	593	419	427	600	430	73.0°	110	69.0°	1140	455	60	51	483	197
	L	19	616	437	463	625	483	73.0°	130	70.0°	1153	455	60	51	483	197
STOUT 10	S	15	589	394	400	566	380	73.0°	100	69.0°	1103	455	60	51	483	190
	M	17	593	419	427	600	430	73.0°	110	69.0°	1140	455	60	51	483	190
	L	19	616	437	463	625	483	73.0°	130	70.0°	1153	455	60	51	483	190

ROAD

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
ULTRA 30	S	19	549	373	415	530	480	74.0°	145	72.0°	978	410	72	45	374	142
	M	19.5	565	383	430	550	500	73.5°	160	72.5°	990	410	72	45	374	142
	L	21	591	389	458	570	530	73.0°	185	73.0°	999	410	72	45	374	142
	XL	22	636	396	495	590	560	73.0°	230	73.5°	1014	410	72	45	374	142
ULTRA 20	S	19	549	373	415	530	480	74.0°	145	72.0°	978	410	72	45	374	130
ULTRA 10	M	19.5	565	383	430	550	500	73.5°	160	72.5°	990	410	72	45	374	130
	L	21	591	389	458	570	530	73.0°	185	73.0°	999	410	72	45	374	130
	XL	22	636	396	495	590	560	73.0°	230	73.5°	1014	410	72	45	374	130
GIRO 40	S	19	560	369	428	530	480	74.0°	145	72.0°	997	420	65	50	395	135
GIRO 30	M	19.5	576	379	444	550	500	73.5°	160	72.5°	1008	420	65	50	395	135
GIRO 20	L	21	602	386	472	570	530	73.0°	185	73.0°	1017	420	65	50	395	135
	XL	22	647	392	508	590	560	73.0°	230	73.5°	1037	420	65	50	395	135
SCOUT 30	M	21.5	563	373	n/a	545	540	73.0°	150	71.0°	1029	435	67	50	395	142
	L	22	586	381	n/a	560	560	73.0°	170	72.0°	1032	435	67	50	395	142
	XL	23	605	384	n/a	575	580	72.5°	190	72.0°	1041	435	67	50	395	142
SCOUT 10	M	19.5	576	379	444	550	500	73.5°	160	72.5°	1023	435	65	50	395	135
	L	21	602	386	472	570	530	73.0°	185	73.0°	1033	435	65	50	395	135
	XL	22	647	392	508	590	560	73.0°	230	73.5°	1053	435	65	50	395	135

URBAN

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
TRANSFER 30	M	18	584	402	441	575	457	73.5°	110	71.5°	1062	440	50	44	470	135
TRANSFER 20	L	20	600	416	473	600	508	73.0°	125	72.0°	1077	440	50	44	470	135
	XL	22	615	426	504	620	560	72.5°	140	72.0°	1091	440	50	44	470	135
TRANSFER 10	S	15.5	573	380	409	550	400	73.5°	100	71.0°	1043	440	50	44	470	135
	M	18	584	402	441	575	457	73.5°	110	71.5°	1062	440	50	44	470	135
	L	20	600	416	473	600	508	73.0°	125	72.0°	1077	440	50	44	470	135
	XL	22	615	426	504	620	560	72.5°	140	72.0°	1091	440	50	44	470	135
TRANSFER 10 WS	XS	15.5	583	367	396	540	400	73.5°	110	70.0°	1041	440	55	43	470	135
	S	17	600	377	418	555	430	73.5°	125	70.5°	1053	440	55	43	470	135
	M	18	615	388	440	570	460	73.5°	140	71.0°	1062	440	55	45	470	135

URBAN (CONT.)

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
TRACE 30	M	18	585	402	431	575	457	73.5°	155	71.5°	1060	440	60	45	416	135
	L	20	606	415	465	600	508	73.0°	175	72.0°	1075	440	60	45	416	135
	XL	22	625	423	498	620	560	72.5°	195	72.0°	1090	440	60	45	416	135
TRACE 20	S	15.5	559	384	392	550	400	73.5°	130	71.0°	1040	440	60	45	416	135
TRACE 10	M	18	585	402	431	575	457	73.5°	155	71.5°	1060	440	60	45	416	135
	L	20	606	415	465	600	508	73.0°	175	72.0°	1075	440	60	45	416	135
	XL	22	625	423	498	620	560	72.5°	195	72.0°	1090	440	60	45	416	135
TRACE 20 WS	XS	15.5	564	373	371	540	400	73.5°	130	71.0°	1027	440	65	45	416	135
	S	17	583	382	395	555	430	73.5°	150	71.0°	1043	440	65	45	416	135
	M	18	593	394	413	570	460	73.5°	160	71.0°	1060	440	65	45	416	135
TRACE 10 WS	XS	15.5	566	372	372	540	400	73.5°	130	71.0°	1027	440	65	40	416	135
	S	17	585	382	395	555	430	73.5°	150	71.0°	1043	440	65	40	416	135
	M	18	595	394	414	570	460	73.5°	160	71.0°	1060	440	65	40	416	135
EXCEED 30 DISC	S	17.5	551	397	406	555	450	74.0°	130	72.0°	1030	430	70	50	395	135
EXCEED 20 DISC	M	19.5	581	413	443	585	500	73.5°	160	72.5°	1050	430	70	50	395	135
EXCEED 10 DISC	L	21	605	420	469	605	530	73.0°	185	72.5°	1065	430	70	50	395	135
	XL	22	631	432	496	625	560	73.0°	210	73.0°	1080	430	70	50	395	135
MARK III	S	17.5	535	397	406	555	450	73.5°	135	71.0°	1042	460	65	45	380	120
	M	19.5	556	420	440	585	500	73.5°	155	71.5°	1068	460	65	45	380	120
	L	21	576	429	465	605	530	73.0°	175	72.0°	1078	460	65	45	380	120
	XL	22	595	437	489	625	560	72.5°	195	72.0°	1104	460	65	45	380	120
MARK II	S	17.5	535	412	405	555	450	75.0°	135	71.0°	1032	460	65	45	380	135
	M	19.5	556	420	435	585	500	73.5°	155	71.5°	1068	460	65	45	380	135
	L	21	576	429	460	605	530	73.0°	175	72.0°	1077	460	65	45	380	135
	XL	22	595	437	483	625	560	72.5°	195	72.0°	1092	460	65	45	380	135
MARK III WS	S	16.5	589	350	300	600	420	67.0°	170	68.0°	1068	465	70	45	410	120
	M	18.5	589	390	330	640	470	67.0°	170	68.0°	1108	465	70	45	410	120
MARK II WS	S	16.5	589	350	300	600	420	67.0°	170	68.0°	1068	465	70	45	410	135
	M	18.5	589	390	300	640	470	67.0°	170	68.0°	1108	465	70	45	410	135

LIFESTYLE

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
EON COMMUTER 20	M	17.5	659	409	460	610	460	73.0°	150	71.0°	1133	480	70	44	490	135
EON COMFORT 20	M	15	615	372	293	560	380	73.0°	150	71.0°	1077	475	70	40	442	135
EON COMMUTER 10	M	17.5	659	409	460	610	460	73.0°	150	71.0°	1133	480	70	44	490	135
EON COMFORT 10	M	15	615	372	293	560	380	73.0°	150	71.0°	1077	475	70	40	442	135
INCLINE	S	14.5	615	319	396	580	370	67.0°	150	68.0°	1050	465	70	48	460	135
	M	16.5	634	331	428	600	420	67.0°	170	68.0°	1068	465	70	48	460	135
	L	19	652	343	464	620	480	67.0°	190	68.0°	1090	465	70	48	460	135
	XL	21	671	355	506	640	530	67.0°	210	68.0°	1119	465	70	48	460	135
ALTURA WS	XS	14	615	329	265	590	360	67.0°	150	68.0°	1060	465	70	48	460	135
SHORELINE WS	S	16.5	634	331	266	600	420	67.0°	170	68.0°	1070	465	70	48	460	135
	M	19	652	343	266	620	480	67.0°	190	68.0°	1090	465	70	48	460	135
VILLA WS	XS	14	568	349	235	590	360	67.0°	150	68.0°	1058	465	70	45	408	135
	S	16.5	587	351	244	600	420	67.0°	170	68.0°	1068	465	70	45	408	135
	M	19	605	363	253	620	480	67.0°	190	68.0°	1087	465	70	45	408	135
SYNCRO 700	Front				n/a	580	496	71.5°	140	71.0°		-	70	45	375	135
	Rear				n/a	615	400	72.0°	-	71.5°		450	70	-		135

YOUTH

	FRAME SIZE	STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
ASPIRE 24	12.5	514	369	362	526	318	73.0°	110	70.0°	995	410	30	38	421	135
PANTHER COUGAR	12.5	496	374	359	526	318	73.0°	110	68.0°	1014	410	30	38	410	135
VERVE PARIS	12.5	496	374	313	526	318	73.0°	110	68.0°	1013	410	30	38	410	135

Proudly Distributed By



Apollo Bicycle Company Pty. Ltd.

ABN 60 001 914 469

Melbourne

3/333 Frankston Dandenong Rd,
Dandenong South, VIC 3175

Phone (03) 9700 9400

apollobikes.com

 @apollobikes

 /apollobicycles