



UPDATED AUG 2024

MOUNTAIN

TRAIL

Trail D 20
Trail D 10
Trail 30
Trail 20
Trail 10

XC

Comp 30
Comp 20
Comp 10

RECREATIONAL

Xpert 20
Xpert 10
Aspire 30
Aspire 30 WS
Aspire 20
Aspire 20 WS
Aspire 10
Aspire 10 WS
Summit 10
Summit 10 WS

FAT BIKE

Stout 20
Stout 10

ROAD

ENDURANCE

Ultra 30
Ultra 10
Giro 40
Giro 30
Giro 20

GRAVEL

Scout 31X
Scout 30
Scout 21X
Scout 10

URBAN

RAIL TRAIL

Transfer 30
Transfer 20
Transfer 10
Transfer 10 WS

CITY

Trace 30
Trace 20
Trace 20 WS
Trace 10
Trace 10 WS

FLAT BAR ROAD

Exceed 20 Disc
Exceed 10 Disc

CLASSIC

Mark III
Mark II
Mark III WS
Mark II WS

LIFESTYLE

E-BIKE

Eon Commuter 20
Eon Comfort 20
Eon Commuter 10
Eon Comfort 10

HYBRID

Altura WS
Shoreline WS
Villa WS

TANDEM

Syncro 700

YOUTH

SPORT

Aspire 24

YOUTH RECREATIONAL

Panther
Cougar
Verve
Paris

MOUNTAIN



MTB OVERVIEW

RACE-READY / PERFORMANCE

TRAIL

Trail ready full suspension geometry with Boost 148 rear end.

Long top tube with short 45mm extension stem.

140mm travel front suspension and 130mm travel rear suspension.

Tough Boost 27.5" wheels built with quality hubs and extra wide rim profiles

Aggressive 27.5" x 2.6 plus size tyres.

Slack head tube angle for aggressive trail riding.

Long top tube with short 45mm extension stem.

120mm travel suspension.

Tough 27.5" wheels built with quality hubs and 32mm width rim.

Aggressive 27.5" x 2.35 tyres.

XC

XC ready 100mm travel front suspension.

Lightweight 29" wheels built with quality hubs and 21mm width rim.

Light weight and durable 6061 alloy frame.

Fast rolling 29" XC tyres.

Aggressive race geometry.

FAT BIKE

Custom carbon or lightweight 6061 alloy fat bike specific frames.

Lightweight and durable forks.

26" oversized fat bike tyres for max traction on low friction surfaces.

Hydraulic disc brakes front and rear with larger diameter rotors for maximum stopping power.

27.5" PLUS



TRAIL D 20



TRAIL D 10

27.5"



TRAIL 30



TRAIL 20



TRAIL 10

29"



COMP 30



COMP 20



COMP 10

26"



STOUT 20



STOUT 10

RECREATIONAL RIDING

RECREATIONAL MTB

Solid alloy frame.

Quality built wheels with alloy rims.

Quality brakes & shifting.

Plush travel suspension front fork, for extra riding comfort.

Choose between 29", 27.5" or 26" wheel size.

29"



XPERT 20



XPERT 10

27.5"



ASPIRE 30



ASPIRE 20



ASPIRE 10



ASPIRE 30 WS



ASPIRE 20 WS



ASPIRE 10 WS

26"



SUMMIT 10



SUMMIT 10 WS

TRAIL D 20

27.5" CARBON TRAIL DUAL SUSPENSION - 1 X 12 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	M	L
Gloss purple / black	22100	22101

SPECIFICATIONS

FRAME	27.5" Plus carbon dual suspension frame, UD carbon, 130mm (5") travel, 1-1/8 - 1-1/2" head tube, 12x148mm Boost	HEAD STEM	Apollo 3D forged stem, 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CHAIN	SRAM Eagle 12 speed
FORK	Rockshox 35 Gold RL tapered alloy steerer, 140mm travel, Boost, with Maxle Stealth	CRANKSET	SRAM SX Eagle 32T L: S=170mm, M/L=175mm	BRAKES	SRAM Level hydraulic disc brakes, F:180mm / R:160mm rotors
REAR SHOCK	Rockshox Monarch R	BOTTOM BRACKET	SRAM Power Spline	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, 12 x 148mm rear hub and 15 x 110mm Thru Axle front hub
HEADSET	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings	PEDALS	Low profile high impact resin	TYRES	Veetire Flow Snap. 27.5 x 2.6, wire bead
HANDLEBAR	Apollo alloy riser bar 31.8mm W: 740mm, sweep: 5°	FRONT DERAILLEUR	Nil	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	REAR DERAILLEUR	SRAM SX Eagle	SEATPOST/CLAMP	KS E30i 125mm travel dropper post 31.6mm
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	EXTRAS	N/A
		CASSETTE	SRAM PG-1210, 11-50T		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRAIL D 10

27.5" TRAIL DUAL SUSPENSION - 1 X 12 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	M	L	XL
Gloss green / black	22102	22103	22104

SPECIFICATIONS

FRAME	27.5" Trail alloy dual suspension frame, 130mm (5") travel. 1-1/8 - 1-1/2" head tube, 12x148mm Boost	HEAD STEM	Apollo 3D forged stem, 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CHAIN	SRAM Eagle 12 speed
FORK	Rockshox 35 Gold RL, tapered alloy steerer, 140mm travel, Boost, with Maxle Stealth	CRANKSET	SRAM SX Eagle 32T L: S=170mm, M/L=175mm	BRAKES	SRAM Level hydraulic disc brakes, F:180mm / R:160mm rotors
REAR SHOCK	Rockshox Monarch R	BOTTOM BRACKET	SRAM Power Spline	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, 12 x 148mm rear hub and 15 x 110mm Thru Axle front hub
HEADSET	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings	PEDALS	Low profile high impact resin	TYRES	Veetire Flow Snap. 27.5 x 2.6, wire bead
HANDLEBAR	Apollo alloy riser bar 31.8mm W: 740mm, sweep: 5°	FRONT DERAILLEUR	Nil	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	REAR DERAILLEUR	SRAM SX Eagle	SEATPOST/CLAMP	KS 860i Dropper Post 125mm travel, 31.6mm
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	EXTRAS	N/A
		CASSETTE	SRAM PG-1210, 11-50T		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Matte Green / Orange	20069	20070	20071

SPECIFICATIONS

FRAME	27.5" lightweight trail specific alloy frame with integrated head tube, internal cable routing, replaceable derailleur hanger	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CHAIN	SRAM Eagle 12 speed
FORK	RST VIBE 110, 140mm travel, Air Spring with hydraulic lockout and preload, boost, 15mm Thru axle	CRANKSET	SRAM NX Eagle 32T, L: S=170mm, M/L =175mm	BRAKES	SRAM Level hydraulic disc brakes, F:180mm / R:160mm rotors
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM Power Spline	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, Boost front and rear alloy disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8" - 1.5" tapered	PEDALS	Low profile high impact resin	TYRES	Veetire Flow Snap 27.5 x 2.35" wire bead
HANDLEBAR	Alloy low riser, W: 700mm, R: 15mm, bore: 31.8mm, sweep: 5°	FRONT DERAILLEUR	Nil	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	REAR DERAILLEUR	SRAM NX Eagle	SEATPOST/CLAMP	KS 860i dropper post 125mm travel, 31.6mm
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	EXTRAS	N/A
		CASSETTE	SRAM PG-1210, 11-50T		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRAIL 20

27.5" MTB - 1 X 12 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Matte Green / Lime	20072	20073	20074

SPECIFICATIONS

FRAME	27.5" lightweight trail specific alloy frame with integrated head tube, internal cable routing, replaceable derailleur hanger	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CASSETTE	SRAM PG-1210, 11-50T
FORK	RST Aerial Air 27.5 TnL, Air Spring, 120mm travel with hydraulic lockout and preload	CRANKSET	SRAM SX Eagle 32T L: S=170mm, M/L=175mm	CHAIN	SRAM Eagle 12 speed
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM Power Spline	BRAKES	Tektro HD-M275 hydraulic disc brakes, F:180mm / R:160mm rotors
HEADSET	A-head semi integrated 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, alloy disc hubs and stainless spokes
HANDLEBAR	Alloy low riser, W: 700mm, R: 15mm, bore: 31.8mm, sweep: 5°	FRONT DERAILLEUR	Nil	TYRES	Veetire Flow Snap 27.5 x 2.35" wire bead
GRIP	Lock-on grips, Kraton rubber	REAR DERAILLEUR	SRAM SX Eagle	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	SEATPOST/CLAMP	Alloy two bolt micro adjust, 27.2mm, L:350mm
				EXTRAS	N/A

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Matte Green / Black	20075	20076	18142

SPECIFICATIONS

FRAME	27.5" lightweight trail specific alloy frame with integrated head tube, internal cable routing, replaceable derailleur hanger	CRANKSET	Alloy MTB crank 28T L: S=170mm, M/L=175mm	CHAIN	KMC X-10
FORK	RST Blaze 27.5 TnL, 120mm travel with hydraulic lockout and preload, alloy crown and lowers.	BOTTOM BRACKET	BSA threaded	BRAKES	Tektro HD-M275 hydraulic disc brakes, F:180mm / R:160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" Weinmann U-32 alloy 32 hole F/V double wall disc specific rims, alloy disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8"	FRONT DERAILLEUR	Nil	TYRES	Veetire Flow Snap 27.5 x 2.35" wire bead
HANDLEBAR	Alloy low riser, W: 700mm, R: 15mm, bore: 31.8mm, sweep: 5°	REAR DERAILLEUR	SRAM X5	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	SHIFT LEVERS	SRAM X5 Trigger, 10 speed	SEATPOST/CLAMP	Alloy two bolt micro adjust, 27.2mm, L:350mm
HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M/L=45mm	CASSETTE	Sunrace CSMS3 10 speed cassette 11 - 42T	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



CODES	S	M	L
Matte Black / Gloss Black	20060	20061	20062

SPECIFICATIONS

FRAME	29er lightweight XC specific alloy frame with tapered head tube, internal cable routing and replaceable derailleur hanger	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/ M=75mm, L=90mm	CHAIN	SRAM Eagle 12 speed
FORK	RST FIRST 110-15 TRL, 100mm travel, 15mm thru axle, Air Spring with hydraulic lockout and preload	CRANKSET	SRAM NX Eagle 34T, L: S=170mm, M/L=175mm	BRAKES	SRAM Level hydraulic disc brakes, 160mm rotors
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM Power Spline	WHEELS	29" Weinmann U-26 alloy 32 hole F/V double wall disc specific rims, Boost front and rear alloy disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8" - 1-1/2" tapered	PEDALS	Low profile high impact resin	TYRES	Veetire Trail Taker 29 x 2.20" wire bead
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	FRONT DERAILLEUR	Nil	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	REAR DERAILLEUR	SRAM NX Eagle	SEATPOST/ CLAMP	27.2mm alloy, micro adjust with twin bolt head, L:400mm
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	EXTRAS	N/A
		CASSETTE	SRAM PG-1210, 11-50T		

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	S	M	L
Matte Navy Blue / Orange	20063	20064	20065

SPECIFICATIONS

FRAME	29er lightweight XC specific alloy frame with tapered head tube, internal cable routing and replaceable derailleur hanger	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/ M=75mm, L=90mm	CASSETTE	SRAM PG-1210, 11-50T
FORK	RST Aerial Air 29 TnL, Air Spring, 100mm travel with hydraulic lockout and preload	CRANKSET	SRAM SX Eagle 34T L: S=170mm, M/L=175mm	CHAIN	SRAM Eagle 12 speed
REAR SHOCK	N/A	BOTTOM BRACKET	SRAM Power Spline	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
HEADSET	A-head semi integrated 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	29" Weinmann U-26 alloy double wall disc rim, 32 hole F/V, anodised disc hubs and stainless spokes
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	FRONT DERAILLEUR	Nil	TYRES	Veetire Trail Taker 29 x 2.20" wire bead
GRIP	Lock-on grips, Kraton rubber	REAR DERAILLEUR	SRAM SX Eagle	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	SRAM SX Eagle trigger 12 speed	SEATPOST/ CLAMP	27.2mm alloy, micro adjust with twin bolt head, L:400mm
				EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



CODES	S	M	L
Matte Black / Blue	20066	20067	20068

SPECIFICATIONS

FRAME	29er lightweight XC specific alloy frame with tapered head tube, internal cable routing and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 30T L: S=170mm, M/L=175mm	CHAIN	KMC X-10
FORK	RST Blaze 29 TnL, 100mm travel with hydraulic lockout and preload, alloy crown and lowers.	BOTTOM BRACKET	BSA threaded	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	29" Weinmann U-26 alloy double wall disc rim, 32 hole F/V, anodised disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8"	FRONT DERAILLEUR	Nil	TYRES	Veetire Trail Taker 29 x 2.20" wire bead
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	REAR DERAILLEUR	SRAM X5	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	SHIFT LEVERS	SRAM X5 Trigger, 10 speed	SEATPOST/CLAMP	Alloy 27.2mm alloy, L:400mm, micro adjust with quick release clamp
HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/M=75mm, L=90mm	CASSETTE	Sunrace CSMS3 10 speed cassette 11 - 42T	EXTRAS	N/A

XPERT 20

29" MTB - 2 X 8 SPEED

TRAIL

XC

RECREATIONAL



CODES	S	M	L	XL	XXL
Matte black / slate	22111	22112	22113	22114	22115
Matte sandstone / black	22116	22117	22118	22119	22120

SPECIFICATIONS

FRAME	Lightweight 6061 alloy disc specific 29er frame with taper wall technology and integrated head tube, internal cable routing	HEAD STEM	Forged alloy A-head Bore: 31.8mm Ext: S/M=75mm, L=90mm, XL=105mm	CASSETTE	Shimano HG-200 8 speed cassette 12-32T
FORK	RST Gila 29, 100mm travel with preload, 51mm offset, alloy crown and lowers.	CRANKSET	Alloy MTB crank 36 x 22T L=170mm	CHAIN	KMC Z-7
REAR SHOCK	N/A	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
HEADSET	Semi integrated A-head 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	29" alloy double wall disc rim, 32 hole A/V, anodised disc hubs and stainless spokes
HANDLEBAR	Alloy flat bar bore: 31.8mm W: 620mm, sweep: 9°	FRONT DERAILLEUR	Shimano FD-M315 2 speed	TYRES	Kenda 29 x 2.1", wire bead
GRIP	Kraton rubber closed end grips	REAR DERAILLEUR	Shimano TX-800 8 speed	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	Shimano SL-M315 2x8 speed	SEATPOST/ CLAMP	Alloy 27.2mm alloy, L:400mm, micro adjust with quick release clamp
				EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

XPERT 10

29" MTB - 3 X 7 SPEED



CODES	S	M	L	XL
Matte black / white	22121	22122	22123	22124
Matte grey / black	22125	22126	22127	22128

SPECIFICATIONS

FRAME	Lightweight 6061 alloy disc specific 29er frame with taper wall technology and integrated head tube, internal cable routing	HEAD STEM	Forged alloy A-head Bore: 31.8mm Ext: S/M=90mm, L/XL=105mm	CASSETTE	Shimano HG-20 7 speed cassette 12-28T
FORK	29" suspension fork, 80mm travel, coil spring, alloy crown and alloy lowers.	CRANKSET	Cold forged 42 x 32 x 22T L=170mm	CHAIN	KMC Z-7
REAR SHOCK	N/A	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
HEADSET	Semi integrated A-head 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	29" alloy double wall disc rim, 32 hole A/V, anodised disc hubs and stainless spokes
HANDLEBAR	Flat bar bore: 31.8mm W: 640mm, sweep: 6°	FRONT DERAILLEUR	Shimano TY-500	TYRES	Kenda 29 x 2.1", wire bead
GRIP	Kraton rubber closed end grips	REAR DERAILLEUR	Shimano TX-800 7 speed	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	Shimano ST-EF-500 21 speed	SEATPOST/CLAMP	Alloy 27.2mm alloy, L:350mm, micro adjust
				EXTRAS	N/A

TRAIL

XC

RECREATIONAL

FAT BIKE

ASPIRE 30

27.5" MTB - 2 X 8 SPEED

TRAIL

XC

RECREATIONAL



CODES	XS	S	M	L	XL
Matte black / blue	22129	22130	22131	22132	22133
Matte sand / black	22134	22135	22136	22137	22138

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy disc specific frame with integrated head tube, internal cable routing, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 36 x 22T L=170mm	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
FORK	RST GILA 27.5, 80mm travel, preload.	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless spokes
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	TYRES	Kenda 27.5 x 2.1" wire bead
HEADSET	Semi integrated A-head 1-1/8"	FRONT DERAILLEUR	Shimano FD-M315 2 speed	SADDLE	Apollo MTB sport saddle
HANDLEBAR	Alloy low riser, W: 640mm, R: 20mm, bore: 31.8mm, sweep: 6°	REAR DERAILLEUR	Shimano TX-800 8 speed	SEATPOST/ CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
GRIP	Kraton grip	SHIFT LEVERS	Shimano SL-M315 2x8 speed	EXTRAS	N/A
HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: XS/S=75mm, M/L=90mm, XL=105mm	CASSETTE	Shimano HG-200 8 speed cassette 12-32T		
		CHAIN	KMC Z-7		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ASPIRE 30 WS

27.5" WOMEN'S SPECIFIC MTB - 2 X 8 SPEED

WS
women's specific

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	XS	S	M
Matte black / purple	22139	22140	22141

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy female disc specific frame with integrated head tube, internal cable routing, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 36 x 22T L=170mm	CHAIN	KMC Z-7
FORK	RST GILA 27.5, 80mm travel, preload.	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Tektro HD-M275 hydraulic disc brakes, 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless spokes
HEADSET	Semi integrated A-head 1-1/8"	FRONT DERAILLEUR	Shimano FD-M315 2 speed	TYRES	Kenda 27.5 x 2.1" wire bead
HANDLEBAR	Alloy low riser, W: 620mm, R: 20mm, bore: 31.8mm, sweep: 6°	REAR DERAILLEUR	Shimano TX-800 8 speed	SADDLE	Apollo MTB sport saddle
GRIP	Kraton grip	SHIFT LEVERS	Shimano SL-M315 2x8 speed	SEATPOST/CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: XS/S=75mm, M=90mm	CASSETTE	Shimano HG-200 8 speed cassette 12-32T	EXTRAS	N/A

ASPIRE 20

27.5" MTB - 3 X 7 SPEED - DISC

TRAIL

XC

RECREATIONAL



CODES	XS	S	M	L	XL
Matte charcoal / black	22142	22143	22144	22145	22146
Matte red / black	22147	22148	22149	22150	22151

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy disc specific frame with integrated head tube, internal cable routing, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	CHAIN	KMC Z-7
FORK	27.5, 80mm travel, preload.	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless spokes
HEADSET	Semi integrated A-head 1-1/8"	FRONT DERAILLEUR	Shimano TZ-500	TYRES	Kenda 27.5 x 2.1" wire bead
HANDLEBAR	Low riser, W: 640mm, R: 20mm, bore: 31.8mm, sweep: 6°	REAR DERAILLEUR	Shimano TY-300	SADDLE	Apollo MTB sport saddle
GRIP	Kraton grip	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
HEAD STEM	Alloy A-head 25.4mm Ext: XS/ S=75mm, M/L=90mm, XL=105mm	CASSETTE	Shimano HG-20 7 speed cassette 12-28T	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ASPIRE 20 WS

27.5" WOMEN'S SPECIFIC MTB - 3 X 7 SPEED - DISC

WS
women's specific

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	XS	S	M
Matte black / turquoise	22152	22153	22154

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy female disc specific frame with integrated head tube, internal cable routing, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	CHAIN	KMC Z-7
FORK	27.5, 80mm travel, preload.	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall disc specific rims, alloy disc hubs and stainless spokes
HEADSET	Semi integrated A-head 1-1/8"	FRONT DERAILLEUR	Shimano TZ-500	TYRES	Kenda 27.5 x 2.1" wire bead
HANDLEBAR	Low riser, W: 620mm, R: 20mm, bore: 31.8mm, sweep: 6°	REAR DERAILLEUR	Shimano TY-300	SADDLE	Apollo MTB sport saddle
GRIP	Kraton grip	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=75mm, M=90mm	CASSETTE	Shimano HG-20 7 speed cassette 12-28T	EXTRAS	N/A

ASPIRE 10

27.5" MTB - 3 X 7 SPEED - V-BRAKE

TRAIL

XC

RECREATIONAL



CODES	XS	S	M	L	XL
Matte black / red	22155	22156	22157	22158	22159
Matte silver / charcoal	22160	22161	22162	22163	22164

SPECIFICATIONS

FRAME	27.5" lightweight 6061 alloy frame with integrated head tube, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	CHAIN	KMC Z-7
FORK	27.5" suspension fork, 80mm travel	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall rims, alloy hubs and stainless spokes
HEADSET	Semi integrated A-head 1-1/8"	FRONT DERAILLEUR	Shimano TZ-500	TYRES	Kenda 27.5 x 2.1" wire bead
HANDLEBAR	Low riser, W: 640mm, R: 20mm, bore: 31.8mm, sweep: 6°	REAR DERAILLEUR	Shimano TY-300	SADDLE	Apollo MTB sport saddle
GRIP	Kraton grip	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/ CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
HEAD STEM	Alloy A-head 25.4mm Ext: XS/ S=75mm, M/L=90mm, XL=105mm	CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ASPIRE 10 WS

27.5" WOMEN'S SPECIFIC MTB -
3 X 7 SPEED - V-BRAKE

WS
women's specific

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	XS	S	M
Matte slate / pink	22165	22166	22167

SPECIFICATIONS

FRAME	Lightweight 6061 female specific, 27.5" alloy frame with integrated head tube, snake stays and replaceable derailleur hanger	CRANKSET	Alloy MTB crank 42 x 32 x 22T L=170mm	CHAIN	KMC Z-7
FORK	27.5" suspension fork, 80mm travel	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	27.5" alloy 32 hole A/V double wall rims, alloy hubs and stainless spokes
HEADSET	Semi integrated A-head 1-1/8"	FRONT DERAILLEUR	Shimano TZ-500	TYRES	Kenda 27.5 x 2.1" wire bead
HANDLEBAR	Low riser, W: 620mm, R: 20mm, bore: 31.8mm, sweep: 6°	REAR DERAILLEUR	Shimano TY-300	SADDLE	Apollo MTB sport saddle
GRIP	Kraton grip	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/CLAMP	Alloy micro adjust 27.2mm, L:350mm with QR clamp
HEAD STEM	Alloy A-head 25.4mm Ext: XS/S=75mm, M=90mm	CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

SUMMIT 10

26" MEN'S MTB - 3 X 7 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	XS	S
Matte black / blue	22168	22169

SPECIFICATIONS

FRAME	Butted 6061 aluminium low standover frame with snake stays and replaceable derailleur hanger	HEAD STEM	Alloy quill stem 1-1/8, L: 80mm, bore: 25.4mm	CASSETTE	Shimano 7 speed 14-28T freewheel
FORK	26" suspension, 50mm travel coil spring, pressed crown with Hi-Ten lowers	CRANKSET	Alloy MTB crank 42 x 32 x 22T L: 170mm	CHAIN	KMC Z-7
REAR SHOCK	N/A	BOTTOM BRACKET	Nutted type	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	Non-slip resin	WHEELS	26" alloy 32 hole A/V rims, quick release front wheel. Stainless spokes
HANDLEBAR	Low riser, W: 580mm, R: 20mm, bore: 25.4mm, sweep: 6°	FRONT DERAILLEUR	Shimano TZ-500	TYRES	26 x 2.0" wire bead
GRIP	Kraton comfort grip	REAR DERAILLEUR	Shimano TY-300	SADDLE	Apollo Comfortech saddle
		SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/CLAMP	27.2mm L:300mm with QR clamp
				EXTRAS	Kickstand

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

SUMMIT 10 WS

26" WOMEN'S SPECIFIC MTB - 3 X 7 SPEED

WS
women's specific

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	XS	S
Gloss silver / purple	22170	22171

SPECIFICATIONS

FRAME	Butted 6061 aluminium low step through women's specific frame with snake stays and replaceable derailleur hanger	HEAD STEM	Alloy quill stem 1-1/8, L: 80mm, bore: 25.4mm	CASSETTE	Shimano 7 speed 14-28T freewheel
FORK	26" suspension, 50mm travel coil spring, pressed crown with Hi-Ten lowers	CRANKSET	Alloy MTB crank 42 x 32 x 22T L: 170mm	CHAIN	KMC Z-7
REAR SHOCK	N/A	BOTTOM BRACKET	Nutted type	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	Non-slip resin	WHEELS	26" alloy 32 hole A/V rims, quick release front wheel. Stainless spokes
HANDLEBAR	Low riser, W: 580mm, R: 20mm, bore: 25.4mm, sweep: 6°	FRONT DERAILLEUR	Shimano TZ-500	TYRES	26 x 2.0" wire bead
GRIP	Kraton comfort grip	REAR DERAILLEUR	Shimano TY-300	SADDLE	Apollo Comfortech women's specific
		SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST/CLAMP	27.2mm L:300mm with QR clamp
				EXTRAS	Kickstand



STOUT 20

26" FAT BIKE - 1 X 11 SPEED

TRAIL

XC

RECREATIONAL

FAT BIKE



CODES	M	L
Gloss navy blue, purple fade / black	22106	22107

SPECIFICATIONS

SPECIFICATIONS INDICATIVE ONLY.

FRAME	Triple butted 6061 alloy fat bike frame. Tapered 1-1/8 to 1.5 head tube. 12x142mm dropout, direct mount front derailleur	HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/ M=75mm, L=90mm,	CASSETTE	SRAM 11 speed cassette 11 - 42T
FORK	Apollo 26" Fatty fork, full alloy with tapered 1-1/8-1.5 steerer	CRANKSET	Alloy 2-pc MTB crank 30T S=170mm, M/L=175mm	CHAIN	KMC-X11
REAR SHOCK	N/A	BOTTOM BRACKET	FSA 100mm sealed cartridge bottom bracket	BRAKES	SRAM Level hydraulic disc brakes, 180mm rotors
HEADSET	A-head semi integrated, for tapered 1-1/8 - 1-1/2" head tube, cartridge bearings with 8mm cone spacer	PEDALS	Low profile high impact resin	WHEELS	26" alloy disc specific rims with square holes for reduced weight, 32 hole F/V, anodised disc hubs and stainless spokes
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	FRONT DERAILLEUR	N/A	TYRES	26 x 4.5" Kenda Juggernaut 60 TPI
GRIP	Lock-on grips, Kraton rubber	REAR DERAILLEUR	SRAM NX 11 speed	SADDLE	Apollo MTB sport saddle
		SHIFT LEVERS	SRAM NX 11 speed	SEATPOST/ CLAMP	Apollo 27.2mm alloy, micro adjust with twin bolt head, L:400mm
				EXTRAS	N/A

TRAIL

XC

RECREATIONAL



CODES	S	M	L
Gloss navy blue / orange	22108	22109	22110

SPECIFICATIONS

SPECIFICATIONS INDICATIVE ONLY.

FRAME	Triple butted 6061 alloy fat bike frame. 1-1/8 head tube. Replaceable dropout, direct mount front derailleur	CRANKSET	Alloy 2-pc MTB crank 30T S=170mm, M/L=175mm	CHAIN	KMC X-10
FORK	Apollo 26" Fatty fork, full cr-mo steel 1-1/8 steerer	BOTTOM BRACKET	100mm sealed cartridge bottom bracket	BRAKES	Promax DSK-923 hydraulic disc brakes with reach adjust, 160mm rotors
REAR SHOCK	N/A	PEDALS	Low profile high impact resin	WHEELS	26" alloy disc specific rims with square holes for reduced weight, 32 hole F/V, anodised disc hubs and stainless spokes
HEADSET	A-head semi integrated 1-1/8"	FRONT DERAILLEUR	N/A	TYRES	26 x 4.5" Kenda Juggernaut 60 TPI
HANDLEBAR	Apollo butted alloy flat bar bore: 31.8mm W: 700mm, sweep: 9°	REAR DERAILLEUR	SRAM X5	SADDLE	Apollo MTB sport saddle
GRIP	Lock-on grips, Kraton rubber	SHIFT LEVERS	SRAM X5 Trigger, 10 speed	SEATPOST/CLAMP	Apollo 27.2mm alloy, micro adjust with twin bolt head, L:400mm
HEAD STEM	Apollo 31.8mm 4 bolt stem, Ext: S/ M=75mm, L=90mm,	CASSETTE	Sunrace CSMS3 10 speed cassette 11 - 42T	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

ROAD



ROAD OVERVIEW

PERFORMANCE

The new Ultra series brings a balance of race performance geometry for all out speed and sharp handling, with specs and gearing designed for efficient pedaling, easy climbing, and all-weather braking.

Custom lightweight carbon performance road frame, thru axle for ultra rigidity.

Shimano groupsets deliver tried-and-true road performance and reliability.

Fast rolling 700 x 28c tyres.

In-line cable adjuster for easy shifter adjustments.

ENDURANCE

Ride-all-day comfort comes standard thanks to the clearance for wide tyres that cushion bumps, and more relaxed geometry designed to reduce fatigue.

This makes the Giro series ideal for long tour rides, bunch rides, or quicker commutes.

Custom lightweight alloy endurance road frame

Fast rolling 700 x 30c tyres. Clearance up to 38c.

Endurance specific saddle for long rides

CARBON



ULTRA 30



ULTRA 10

ALLOY



GIRO 40



GIRO 30



GIRO 20

GRAVEL

For 2022, our gravel range is expanding. New models feature a 1X drivetrain, meaning riders can now choose between 1X or 2X, and carbon or alloy frames.

The frame and fork use familiar endurance road bike geometry paired with clearance for wider tyres, while carrier and fender mounts allow you to customise for any adventure.

Shimano's gravel-specific groupsets provide quiet and stable gearing, and rugged reliability, allowing you to explore tracks you never thought possible. Now available in 1x or 2x models.

Custom lightweight carbon gravel frame

Carbon gravel-specific fork, carbon tapered steerer, 12mm thru axle

Shimano gravel-specific groupset

700 x 40c tyres

Custom lightweight alloy gravel frame

Carbon gravel-specific fork, carbon tapered steerer, 12mm thru axle

Shimano gravel-specific groupset

700 x 40c tyres

CARBON



SCOUT 31X



SCOUT 30

ALLOY



SCOUT 21X



SCOUT 10

ULTRA 30

700C CARBON ROAD - 2 X 11 SPEED

PERFORMANCE

ENDURANCE



CODES	S	M	L	XL
Matte Charcoal / Black	22182	22183	22184	22185

SPECIFICATIONS

FRAME	Hi-modulus carbon modular monocoque flat mount disc specific road frame. Box technology down tube with BB86 press fit system, tapered seatstays, 12mm thru axle, tapered head tube 1-1/8 to 1-1/2"	HEADSTEM	FSA Gossamer 1-1/8" 3D forged alloy 4 bolt stem. XS=90mm, S=100mm, M=110mm, L/ XL=120mm	CASSETTE	Shimano 11 speed cassette 11-28T
FORK	Full carbon straight blade flat mount disc fork with tapered 1-1/8 to 1-1/2" carbon steerer, 12mm thru axle, fully integrated	CRANKSET	Shimano Ultegra, 50/34T L: XS/S=170mm, M=172.5mm, L/XL=175mm	CHAIN	KMC 11 speed
HEADSET	A-head integrated 1-1/2 to 1-1/8" sealed angular cartridge bearings with 15mm cone spacer	BOTTOM BRACKET	BB86 Pressfit	BRAKES	Shimano BR-R8020 hydraulic road disc brakes with 160mm rotors
HANDLEBAR	FSA Vero Compact 31.8mm alloy W: XS=40cm, S/M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c DT Swiss E 1800 Spline DB 23 clincher 12mm thru axles wheelset
GRIP	Soft PU wrap with gel	FRONT DERAILLEUR	Shimano Ultegra FD-8000 braze on	TYRES	Veetire Roadrunner 700 x 28c, 90 TPI, folding bead, CC – Continuum Compound
		REAR DERAILLEUR	Shimano Ultegra RD-R8000 11 speed	SADDLE	Prologo Kappa RS
		SHIFT LEVERS	Shimano Ultegra BR-R8020 22 speed STI hydraulic road shifters	SEATPOST / CLAMP	Apollo carbon 27.2mm 350mm long post, twin bolt, forged head, alloy seat clamp

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

GRAVEL

ULTRA 10

700C CARBON ROAD - 2 X 11 SPEED

PERFORMANCE

ENDURANCE

GRAVEL



CODES	S	M	L	XL
Matte Red / Black	22192	22193	22194	22195

SPECIFICATIONS

FRAME	Hi-modulus carbon modular monocoque flat mount disc specific road frame. Box technology down tube with BB86 press fit system, tapered seatstays, 12mm thru axle, tapered head tube 1-1/8 to 1-1/2"	GRIP	Soft PU wrap with gel	SHIFT LEVERS	Shimano 105 STI 22 speed shifters
FORK	Full carbon straight blade flat mount disc fork with tapered 1-1/8 to 1-1/2" carbon steerer, 12mm thru axle, fully integrated	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem. XS=90mm, S=100mm, M=110mm, L/XL=120mm	CASSETTE	Shimano 11 speed cassette 11-28T
HEADSET	A-head integrated 1-1/2 to 1-1/8" sealed angular cartridge bearings with 15mm cone spacer	CRANKSET	Shimano FC-R7000 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm, L/XL=175mm	CHAIN	KMC 11 speed
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy W: XS=40cm, S/M=42cm, L/XL=44cm	BOTTOM BRACKET	BB86 Pressfit	BRAKES	Shimano BR-R7020 105 hydraulic road disc brakes with 160mm rotors
		PEDALS	Nil	WHEELS	700c DT SWISS R-470-Disc rims, 32 hole F/V, 12mm thru axle alloy disc hubs and stainless spokes.
		FRONT DERAILLEUR	Shimano 105 braze on	TYRES	Veetire Roadrunner 700c x 28c, MPC - Multiple Purpose Compound
		REAR DERAILLEUR	Shimano 105 11 speed	SADDLE	Apollo road saddle
				SEATPOST / CLAMP	Apollo 27.2mm 350mm long post, twin bolt, forged head, alloy seat clamp

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



GIRO 40

700C ROAD DISC - 2 X 11 SPEED

PERFORMANCE

ENDURANCE

GRAVEL



CODES	S	M	L	XL
Matte Black / Charcoal	22069	22070	22071	22072

SPECIFICATIONS

FRAME	Superlite butted 6061 alloy, integrated head tube and replaceable derailleur hanger	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem, XS=90mm, S=100mm, M/L=110mm, XL=120mm	SHIFT LEVERS	Shimano 105 STI 22 speed shifters
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	CRANKSET	Shimano FC-RS510 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm, L/XL=175mm	CASSETTE	Shimano 11 speed cassette 11-32T
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	Shimano integrated sealed	CHAIN	KMC X-11
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy V: XS/S/M=42cm, L/XL=44cm	PEDALS	Nil	BRAKES	Shimano BR-R7020 105 hydraulic road disc brakes with 160mm rotors
GRIP	Soft PU wrap with gel	FRONT DERAILLEUR	Shimano 105 band clamp	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole 11 speed disc hubs with stainless spokes
		REAR DERAILLEUR	Shimano 105 11 speed	TYRES	Veetire Roadrunner 700c x 30c, MPC - Multiple Purpose Compound
				SADDLE	Apollo road saddle
				SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

PERFORMANCE

ENDURANCE



CODES	S	M	L	XL
Gloss Silver / Black	22074	22075	22076	22077

SPECIFICATIONS

GRAVEL

FRAME	Superlite butted 6061 alloy, integrated head tube and replaceable derailleur hanger	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem. XS=90mm, S=100mm, M/L=110mm, XL=120mm	CASSETTE	Shimano 11 speed cassette 11-32T
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	CRANKSET	Shimano FC-RS510 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm, L/XL=175mm	CHAIN	KMC X-11
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	Shimano integrated sealed	BRAKES	Tektro MC-C550 mechanical flat mount disc brakes with 160mm rotors
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy W: XS/S/M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole 11 speed disc hubs with stainless spokes
GRIP	Soft PU wrap with gel	FRONT DERAILLEUR	Shimano 105 band clamp	TYRES	Veetire Roadrunner 700c x 30c, MPC - Multiple Purpose Compound
		REAR DERAILLEUR	Shimano 105 11 speed	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano 105 STI 22 speed shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

GIRO 20

700C ROAD - 2 X 10 SPEED

PERFORMANCE

ENDURANCE

GRAVEL



CODES	XS	S	M	L	XL
Matte Black / Red	22078	22079	22080	22081	22082

SPECIFICATIONS

FRAME	Superlite butted 6061 alloy, integrated head tube and replaceable derailleur hanger	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem, XS=90mm, S=100mm, M/L=110mm, XL=120mm	CASSETTE	Shimano HG-500 10 speed cassette 11-32T
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	CRANKSET	Shimano FC-RS400 compact 50 x 34T 2 piece crank, XS=170mm, S/M=172.5mm, L/XL=175mm	CHAIN	KMC X-10
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	Shimano integrated sealed	BRAKES	Tektro MD-C310 mechanical flat mount disc brakes with 160mm rotors
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy V: XS/S/M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole 10 speed disc hubs with stainless spokes
GRIP	Soft PU wrap with gel	FRONT DERAILLEUR	Shimano Tiagra FD-4700	TYRES	Veetire Roadrunner 700c x 30c, MPC - Multiple Purpose Compound
		REAR DERAILLEUR	Shimano Tiagra RD-4700-GS	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano Tiagra 20 speed STI shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

GRAVEL

The road less travelled is not a metaphor, it's the ultimate destination. Dirt, gravel, cracked pavement, or back-country roads are now all open to explore.

Our gravel series is purpose built for all-surface road riding. The frame and fork use familiar endurance road bike geometry with extra clearance for wider tyres, and support for 700c or 650b wheels. For added versatility, carrier and fender mounts allow you to equip your Scout for any adventure.



The expanded Scout range is equipped with Shimano's multi-surface GRX groupsets, specifically designed to perform in demanding and unpredictable landscapes, while delivering Shimano's renowned gearing and reliability.





SCOUT OUT ADVENTURE





ENDURANCE GEOMETRY

Taking our familiar endurance road geometry and pairing it with extra wide tyre clearance delivers a gravel-optimised experience.

*Run 700c x 40c or swap to
650b x 50c tyres*

SHIMANO GRX

BRAKE WITH CONFIDENCE

Ergonomic brake levers with anti-slip coating keep you comfortable and in control in all riding conditions.

DRIVETRAIN TYRE CLEARANCE

Scout models running a 2X crank use Shimano's redesigned front derailleur and crankset giving the chainline more space, allowing for broader wheel sizes and tyres.

SHIMANO SHADOW RD+

Introduced in Shimano's MTB range and designed for more aggressive riding, this feature gives the derailleur a super low-profile design. It also reduces chain slap, improves chain retention and minimises the risk of clipping obstacles.

SCOUT 31X

700C CARBON GRAVEL DISC - 1 X 11 SPEED

PERFORMANCE

ENDURANCE



CODES	M	L	XL
Matte charcoal / black	22062	22063	22064

SPECIFICATIONS

FRAME	Hi-modulus carbon monocoque disc specific gravel road frame. BB86 press fit system, slim seatstays, tapered head tube 1-1/8 to 1-1/2"	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem. M/L=110mm, XL=120mm	CASSETTE	Shimano CS-M8000, 11-42T
		CRANKSET	Shimano FC-RX810, GRX, 40T 2 piece crank, M=172.5mm, L/XL=175mm	CHAIN	KMC X-11
FORK	Full carbon straight blade flat mount disc fork with tapered 1-1/8 to 1-1/2" carbon steerer, 12mm Thru Axle	BOTTOM BRACKET	BB86 Pressfit	BRAKES	Shimano ST-RX810 GRX hydraulic road disc brakes with 160mm rotors
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	PEDALS	Nil	WHEELS	700c DT SWISS R-500-Disc rims, 28 hole 11 speed disc hubs with stainless spokes
HANDLEBAR	Apollo butted alloy anatomic flared drop 31.8mm alloy W: M=44cm, L/XL=46cm	FRONT DERAILLEUR	Nil	TYRES	Veetire T-CX 700c x 40c, 27TPI, folding bead MPC - Multiple Purpose Compound
GRIP	Soft PU wrap with gel	REAR DERAILLEUR	Shimano RD-RX810	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano ST-RX810 11 speed shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

GRAVEL

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

SCOUT 30

700C CARBON GRAVEL DISC - 2 X 11 SPEED

PERFORMANCE

ENDURANCE

GRAVEL



CODES	M	L	XL
Matte Slate / Black / Orange	20010	20011	20012

SPECIFICATIONS

FRAME	Hi-modulus carbon monocoque disc specific gravel road frame. BB86 press fit system, slim seatstays, tapered head tube 1-1/8 to 1-1/2"	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem. M/L=110mm, XL=120mm	CASSETTE	Shimano CS-M8000, 11-40T
FORK	Full carbon straight blade flat mount disc fork with tapered 1-1/8 to 1-1/2" carbon steerer, 12mm Thru Axle	CRANKSET	Shimano FC-RX810, GRX, 48 x 31T 2 piece crank, M=172.5mm, L/XL=175mm	CHAIN	KMC X-11
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	BB86 Pressfit	BRAKES	Shimano ST-RX810 GRX hydraulic road disc brakes with 160mm rotors
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy W: M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c DT SWISS R-500-Disc rims, 28 hole 11 speed disc hubs with stainless spokes
GRIP	Soft PU wrap with gel	FRONT DERAILLEUR	Shimano FD-RX810	TYRES	Veetire G-Sport 700c x 40c, 72TPI, wire bead MPC - Multiple Purpose Compound
		REAR DERAILLEUR	Shimano RD-RX810	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano ST-RX810 22 speed shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

SCOUT 21X

700C ALLOY GRAVEL DISC - 1 X 11 SPEED

PERFORMANCE

ENDURANCE



CODES

M

L

XL

Matte charcoal / black / blue

22065

22066

22067

SPECIFICATIONS

FRAME	Superlite butted 6061 alloy gravel road, integrated head tube and replaceable derailleur hanger	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem. M/L=110mm, XL=120mm	CASSETTE	Shimano CS-M7000, 11-42T
FORK	Full carbon straight blade flat mount disc fork with tapered 1-1/8 to 1-1/2" carbon steerer, 12mm Thru Axle	CRANKSET	Shimano FC-RX600, GRX, 40T 2 piece crank, M=172.5mm, L/XL=175mm	CHAIN	KMC X-11
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	BSA Threaded	BRAKES	Shimano ST-RX600 GRX hydraulic road disc brakes with 160mm rotors
HANDLEBAR	Apollo butted alloy anatomic flared drop 31.8mm alloy W: M=44cm, L/XL=46cm	PEDALS	Nil	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole 10 speed disc hubs with stainless spokes
GRIP	Soft PU wrap with gel	FRONT DERAILLEUR	Nil	TYRES	Veetire T-CX 700c x 40c, 27TPI, folding bead MPC - Multiple Purpose Compound
		REAR DERAILLEUR	Shimano RD-RX812	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano ST-RX600 11 speed shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp

SCOUT 10

700C ALLOY GRAVEL DISC - 2 X 10 SPEED

PERFORMANCE

ENDURANCE

GRAVEL



CODES	M	L	XL
Matte Charcoal / Black / Red	20013	20014	20015

SPECIFICATIONS

FRAME	Superlite butted 6061 alloy gravel road, integrated head tube and replaceable derailleur hanger	HEADSTEM	Apollo 1-1/8" 3D forged alloy 4 bolt stem. M/L=110mm, XL=120mm	CASSETTE	Shimano CS-HG50, 11-36T
FORK	Full carbon straight blade flat mount disc fork with tapered 1-1/8 to 1-1/2" carbon steerer, 12mm Thru Axle	CRANKSET	Shimano FC-RX400, GRX, 46 x 30T 2 piece crank, M=172.5mm, L/XL=175mm	CHAIN	KMC X-10
HEADSET	A-head integrated 1-1/2 to 1-1/8" bearings with 15mm cone spacer	BOTTOM BRACKET	BSA Threaded	BRAKES	Shimano ST-RX400 GRX hydraulic road disc brakes with 160mm rotors
HANDLEBAR	Apollo butted alloy anatomic shallow drop 31.8mm alloy W: M=42cm, L/XL=44cm	PEDALS	Nil	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole 10 speed disc hubs with stainless spokes
GRIP	Soft PU wrap with gel	FRONT DERAILLEUR	Shimano FD-RX400	TYRES	Veetire G-Sport 700c x 40c, 72TPI, wire bead MPC - Multiple Purpose Compound
		REAR DERAILLEUR	Shimano RD-RX400	SADDLE	Apollo road saddle
		SHIFT LEVERS	Shimano ST-RX400 20 speed shifters	SEATPOST / CLAMP	Apollo alloy 27.2mm post, twin bolt with alloy seat clamp



URBAN

RAIL TRAIL
CITY
FLAT BAR ROAD
CLASSIC



URBAN OVERVIEW

RAIL TRAIL

CITY

Designed to be our do-it-all commuter, the Transfer series features a comfortable riding position, and the suspension fork with knobby tyres allows you to go from street to gravel paths with confidence.

700c lightweight alloy commuter frame

Suspension fork offers confidence and control on rough surfaces.

Wide, multi-terrain tyres for balanced speed, grip and comfort

With riser bars creating a riding position more relaxed and comfortable than a traditional flat bar road bike, the Trace offers smooth and efficient commuting thanks to its wide tyres, rigid fork and reliable gearing. The Trace is the go-to bike for the everyday commuter looking for the perfect balance of agility, toughness, and comfort.

700c lightweight alloy commuter frame

Rigid fork for light and responsive handling.

Wide tyres for smooth rolling comfort in urban environments



TRANSFER 30



TRANSFER 20



TRANSFER 10



TRANSFER 10 WS



TRACE 30



TRACE 20



TRACE 10



TRACE 20 WS



TRACE 10 WS

FLAT BAR ROAD

Our Exceed Disc series takes our endurance road geometry, and adds powerful disc brakes for riding in all conditions, and the versatility of wide tyre clearance. Combined with our lightweight alloy frame and carbon fork, the Exceed Disc series is built for fitness enthusiasts and dedicated commuters looking for speed and performance.

700c super lightweight alloy frame, endurance road geometry, built for speed

Lightweight carbon fork

Powerful disc brakes

700 x 32c or 35c tyres



EXCEED 20 DISC



EXCEED 10 DISC

CLASSIC

The Apollo Classic Series draws from our heritage to reinvent our original Mark bikes and add a modern-day flair to retro frames. Combining classic good looks with contemporary components, these bikes bring style and comfort to every ride.

Classic style commuter frames

Hi-Ten steel traditional fork

700 x 38-42c tyres for smooth rolling comfort



MARK III



MARK III WS



MARK II



MARK II WS



TRANSFER

RAIL TRAIL SERIES

TRANSFER 30

700C RAIL TRAIL - 3 X 9 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Sand / Black	22025	22026	22027	22028

SPECIFICATIONS

FRAME	Butted 6061 frame with smooth welding. Integrated head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	Shimano FC-T3010 48 x 36 x 26T L: S/M=170mm, L/XL=175mm	BRAKES	Promax DSK-923 hydraulic disc brakes with reach adjust, 160mm rotors
FORK	RST Nova ML suspension fork, 60mm travel with lockout and preload. alloy crown with alloy lowers	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Veetire Rail, 700 x 40c
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm, sweep: 6°	FRONT DERAILLEUR	Shimano FD-T3000	SADDLE	Apollo Ergotech dual density saddle
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano RD-M3000	SEATPOST / CLAMP	Alloy twin bolt micro adjust 27.2mm
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano SL-M2000 Altus 3 x 9 speed	EXTRAS	N/A
		CASSETTE	Shimano 9 speed cassette 11-32T		
		CHAIN	KMC Z-9		

TRANSFER 20

700C RAIL TRAIL - 3 X 8 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Slate / Black	22029	22030	22031	22032

SPECIFICATIONS

FRAME	6061 butted alloy frame with integrated head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	Suntour XCE 48 x 38 x 28T L: S/M=170mm, L/XL=175mm	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	RST Neon ML suspension fork, 60mm travel with lockout and preload, alloy crown with alloy lowers	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann X-M1 double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm wide, sweep: 6°	FRONT DERAILLEUR	Shimano FD-TY710	SADDLE	Apollo Ergotech dual density saddle
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano RD-TX800 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	EXTRAS	N/A
		CASSETTE	Shimano 8 speed cassette 12-32T		
		CHAIN	KMC Z-7		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRANSFER 10

700C RAIL TRAIL - 3 X 7 SPEED



CODES	S	M	L	XL
Matte Charcoal / Black / Red	22033	22034	22035	22036
Matte Silver / Black	22037	22038	22039	22040

SPECIFICATIONS

FRAME	6061 butted alloy frame, pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L=170mm	CHAIN	KMC Z-51
FORK	Suntour M3010 suspension fork, 700c, 50mm travel, alloy crown and lowers	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact nylon	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HANDLEBAR	Low riser, bore: 31.8mm, W:600mm, sweep: 6°	FRONT DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Apollo Ergotech dual density saddle
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC

TRANSFER 10 WS

700C WOMEN'S RAIL TRAIL - 3 X 7 SPEED



RAIL TRAIL

CITY
FLAT BAR ROAD

CLASSIC



CODES	XS	S	M
Matte Slate / Black / Ice Blue	22041	22042	22043
Matte Charcoal / Black / Lavender	22044	22045	22046

SPECIFICATIONS

FRAME	6061 butted alloy women's specific frame, pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L=170mm	CHAIN	KMC Z-51
FORK	Suntour M3010 suspension fork, 700c, 50mm travel, alloy crown and lowers	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact nylon	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HANDLEBAR	Low riser, bore: 31.8mm, W: 580mm, sweep: 6°	FRONT DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Apollo women's specific Ergotech saddle
HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.



TRACE

URBAN SERIES



TRACE 30

700C CITY - 3 X 9 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Sand / Black	22000	22001	22002	22003

SPECIFICATIONS

FRAME	Butted 6061 frame with smooth welding. Integrated head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	Shimano FC-T3010 48 x 36 x 26T L: S/M=170mm, L/XL=175mm	BRAKES	Tektro HD-T275 hydraulic disc brakes, with 3 finger levers and 160mm rotors
FORK	Alloy 700c disc specific commuter fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Veetire Speedster 700 x 40c with reflective side walls
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm, sweep: 6°	FRONT DERAILLEUR	Shimano FD-T3000	SADDLE	Apollo Ergotech dual density saddle
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano RD-M3000	SEATPOST / CLAMP	Alloy twin bolt micro adjust 27.2mm
HEADSTEM	4 bolt alloy stem, 31.8mm, S=75mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano SL-M2000 Altus 3 x 9 speed	EXTRAS	N/A
		CASSETTE	Shimano 9 speed cassette 11-32T		
		CHAIN	KMC Z-9		

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Slate / Black	22004	22005	22006	22007

SPECIFICATIONS

FRAME	6061 butted alloy frame with integrated head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	Suntour XCE 48 x 38 x 28T L: S/M=170mm, L/XL=175mm	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	700c disc specific hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Kenda Urban sport 700 x 38c wire bead
HANDLEBAR	Alloy low riser, bore: 31.8mm, W: 600mm, sweep: 6°	FRONT DERAILLEUR	Shimano FD-TY710	SADDLE	Apollo Ergotech dual density saddle
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano RD-TX800 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	EXTRAS	N/A
		CASSETTE	Shimano 8 speed cassette 12-32T		
		CHAIN	KMC Z-7		

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRACE 20 WS

700C WOMEN'S CITY - 3 X 8 SPEED

WS
women's specific

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	XS	S	M
Matte Slate / Black / Turquoise	22008	22009	22010

SPECIFICATIONS

FRAME	6061 butted alloy women's specific frame with integrated head tube, pannier mounts and replaceable derailleur hanger.	CRANKSET	Suntour XCE 48 x 38 x 28T L: XS/S/M=170mm	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	700c disc specific hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	WHEELS	700c Weinmann U-26 double wall disc specific rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	Low profile high impact resin	TYRES	Kenda Urban sport 700 x 38c wire bead
HANDLEBAR	Alloy low riser, bore: 31.8mm, W:580mm, sweep 6°	FRONT DERAILLEUR	Shimano FD-TY710	SADDLE	Apollo women's specific Ergotech saddle
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano RD-TX800 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	EXTRAS	N/A
		CASSETTE	Shimano 8 speed cassette 12-32T		
		CHAIN	KMC Z-7		

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Charcoal / Black / Red	22011	22012	22013	22014
Matte Silver / Black	22015	22016	22017	22018

SPECIFICATIONS

FRAME	6061 butted alloy frame, pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L: S/M/L/XL=170mm	CHAIN	KMC Z-51
FORK	700c hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact nylon	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HANDLEBAR	Low riser, bore: 31.8mm, W:600mm, sweep: 6°	FRONT DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban sport 700 x 38c wire bead
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Apollo Ergotech dual density saddle
HEADSTEM	Alloy, 31.8mm, S=70mm, M/L=90mm, XL=105mm	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TRACE 10 WS

700C WOMEN'S CITY - 3 X 7 SPEED

WS
women's specific



CODES	XS	S	M
Matte Slate / Black / Ice Blue	22019	22020	22021
Matte Charcoal / Black / Lavender	22022	22023	22024

SPECIFICATIONS

FRAME	6061 butted alloy women's specific frame, pannier mounts and replaceable derailleur hanger.	CRANKSET	Alloy crank with 48 x 38 x 28T L: XS/S/M=170mm	CHAIN	KMC Z-51
FORK	700c hi-ten rigid integrated trekking fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head semi integrated 1-1/8" with 10mm cone spacer	PEDALS	High impact nylon	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release hubs with double seal system. Stainless spokes
HANDLEBAR	Low riser, bore: 31.8mm, W: 580mm, sweep: 6°	FRONT DERAILLEUR	Shimano TX-800 top pull for 31.8mm	TYRES	Kenda Urban sport 700 x 38c wire bead
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano TY-300 7 speed	SADDLE	Apollo women's specific Ergotech saddle
HEADSTEM	Alloy, 31.8mm, XS/S= 70mm, M=90mm	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-28T freewheel	EXTRAS	N/A

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC

EXCEED DISC

LIGHTWEIGHT SPEED



**Designed for fitness enthusiasts,
dedicated commuters, and riders
looking for speed and performance
on a light weight flat-bar.**

Superlite butted alloy frame with Apollo's endurance road DNA, paired with a tapered head tube for stiffness and control.

A lightweight carbon fork on all models, delivering strength and speed.

Clearance for wider tyres; balancing performance with rider comfort.

Lighter and more compact flat mount disc brakes on all Exceed Disc models offer superior braking for all riding conditions.

Mudguard mounts adapt the bike for riding in all seasons.



DISC BRAKE MODELS
35c tyres

RIM BRAKE MODELS
28c tyres

EXCEED 20 DISC

700C COMMUTER DISC - 2 X 9 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Black / Charcoal / Blue	22087	22088	22089	22090

SPECIFICATIONS

FRAME	Superlite butted 6061 aluminium frame with integrated head tube, internal cable routing, pannier mounts and replaceable forged derailleur hanger	HEADSTEM	Alloy 4 bolt stem, bore: 31.8mm L: S=75mm, M/L=90mm, XL=105mm	CASSETTE	Shimano 9 speed cassette 11-32T
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	CRANKSET	Shimano FC-MT210 46 x 30T L: S/M=170mm, L/XL=175mm	CHAIN	KMC Z-9
HEADSET	A-head semi integrated 1-1/8" tapered with 10mm cone spacer	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Tektro C550 mechanical disc brakes, flat mount with 160mm rotors
HANDLEBAR	Alloy flat bar, bore: 31.8mm, W: 600mm, sweep: 5°	PEDALS	Low profile high impact resin	WHEELS	700c custom Weinmann U-26 32 hole double wall A/V rims, alloy disc hubs and stainless spokes
GRIP	Kraton ERGO comfort grip	FRONT DERAILLEUR	Shimano FD-T3000 Acera	TYRES	Veetire Zilent, 700 x 35c wire bead
		REAR DERAILLEUR	Shimano RD-T3000 Acera	SADDLE	Apollo contoured saddle
		SHIFT LEVERS	Shimano SL-M3000 2 x 9 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
				EXTRAS	N/A

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

EXCEED 10 DISC

700C COMMUTER DISC - 3 X 8 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Matte Black / Charcoal / Silver	22091	22092	22093	22094

SPECIFICATIONS

FRAME	Superlite butted 6061 aluminium frame with integrated head tube, internal cable routing, pannier mounts and replaceable forged derailleur hanger	HEADSTEM	Alloy 4 bolt stem, bore: 31.8mm L: S=75mm, M/L=90mm, XL=105mm	CASSETTE	Shimano 8 speed cassette 12-32T
FORK	Carbon straight blade flat mount disc specific fork with tapered 1-1/8 to 1-1/2" headtube	CRANKSET	Suntour XCE crank with 48 x 38 x 28T L: S/M=170mm, L/XL=175mm	CHAIN	KMC Z-7
HEADSET	A-head semi integrated 1-1/8" tapered with 10mm cone spacer	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Tektro MD-U310 mechanical disc brakes, flat mount with 160mm rotors
HANDLEBAR	Alloy flat bar, bore: 31.8mm, W: 580mm, sweep: 5°	PEDALS	Low profile high impact resin	WHEELS	700c custom Weinmann U-26 32 hole double wall A/V rims, alloy disc hubs and stainless spokes
GRIP	Kraton ERGO comfort grip	FRONT DERAILLEUR	Shimano FD-TY710 top pull for 31.8mm	TYRES	Veetire Zilent, 700 x 35c wire bead
		REAR DERAILLEUR	Shimano RD-TX800 8 speed	SADDLE	Apollo contoured saddle
		SHIFT LEVERS	Shimano ST-EF500 Ez Fire 3 x 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
				EXTRAS	N/A

MARK

MEN'S



MARK III

700C ALLOY CLASSIC - 1 X 3 SPEED IGH

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	M	L	XL
Gloss Navy Blue / Gloss Cream / Gloss Orange	17091	17092	17093

SPECIFICATIONS

FRAME	Alloy 6061 frame with rack and fender mounts	CRANKSET	Cold forged High polish 38T alloy crank with guard L: 170mm	CHAIN	KMC Z-610
FORK	700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	A-head threadless 1-1/8"	PEDALS	High impact dual compound resin	WHEELS	700c double wall alloy rims. 32 hole A/V, alloy hubs with double seal system. Stainless spokes
HANDLEBAR	Alloy low riser, bore: 25.4mm, W: 580mm, sweep: 6°	FRONT DERAILLEUR	N/A	TYRES	700 x 42c wire bead
GRIP	Leather look tape grip	REAR DERAILLEUR	3 speed internal hub gears	SADDLE	Classic series saddle with brass rivets
HEADSTEM	Alloy 2 bolt stem, 25.4mm, S/M=90mm, L/XL=105mm	SHIFT LEVERS	Shimano Nexus shift 3 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 18T freewheel	EXTRAS	Alloy full length front and rear mudguards, alloy pannier rack, alloy front rack



MARK II

700C STEEL CLASSIC - 1 X 8 SPEED

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M	L	XL
Gloss Slate / Gloss Sky Blue / Gloss Red	17094	17095	17096	17097

SPECIFICATIONS

FRAME	Hi tensile disc specific commuter frame with rack and fender mounts	CRANKSET	Cold forged 44T crank with double chain cover L: 170mm	CHAIN	KMC Z-7
FORK	700c Hi-ten disc specific 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Promax APD-3.0 mechanical disc brakes with 160mm rotors
HEADSET	A-head threadless 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HANDLEBAR	Alloy low riser, bore: 25.4mm, W: 580mm, sweep: 6°	FRONT DERAILLEUR	N/A	TYRES	700 x 40c wire bead
GRIP	Leather look tape grip	REAR DERAILLEUR	Shimano Acera 8 speed	SADDLE	Classic series saddle with brass rivets
HEADSTEM	Alloy 2 bolt stem, 25.4mm, S/M=90mm, L/XL=105mm	SHIFT LEVERS	Shimano Acera Rapid fire 8 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	Alloy full length front and rear mudguards

MARK

WOMEN'S



MARK III WS

700C ALLOY CLASSIC - 1 X 3 SPEED IGH

WS
women's specific



RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC

CODES	S	M
Purple / Silver / Blue	18110	18111

SPECIFICATIONS

FRAME	Alloy 6061 city frame with rack and fender mounts	CRANKSET	Cold forged 44T crank with double chain cover L: 170mm	CHAIN	KMC Z-610
FORK	700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c double wall alloy rims. 32 hole A/V, alloy hubs with double seal system. Stainless spokes
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm, Sweep 43°	FRONT DERAILLEUR	N/A	TYRES	700 x 42c wire bead
GRIP	Kraton gel dual density comfort grip	REAR DERAILLEUR	3 speed internal hub gears	SADDLE	Classic series saddle with brass rivets
HEADSTEM	Alloy quill stem	SHIFT LEVERS	Shimano Nexus shift 3 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 18T freewheel	EXTRAS	Alloy full length front and rear mudguards, alloy pannier rack, alloy front rack

MARK II WS

700C STEEL CLASSIC - 1 X 7 SPEED

WS
women's specific

RAIL TRAIL

CITY

FLAT BAR ROAD

CLASSIC



CODES	S	M
Peach / Navy Blue / Sky Blue	18112	18113

SPECIFICATIONS

FRAME	Hi tensile city frame with rack and fender mounts	CRANKSET	Cold forged 44T crank with double chain cover L: 170mm	CHAIN	KMC Z-51
FORK	700c Hi-ten 1-1/8 straight blade fork with rack and fender mounts	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c double wall alloy rims. 32 hole A/V, alloy hubs with double seal system. Stainless spokes
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm, Sweep 43°	FRONT DERAILLEUR	N/A	TYRES	700 x 42c wire bead
GRIP	Kraton gel dual density comfort grip	REAR DERAILLEUR	Shimano RD-TY500	SADDLE	Classic series saddle with brass rivets
HEADSTEM	Alloy quill stem	SHIFT LEVERS	Shimano Revoshift 7 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 7 speed 14-34T freewheel	EXTRAS	Alloy full length front and rear mudguards

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

LIFESTYLE



EON 20 SERIES



RELAX AND RIDE

Shimano's most affordable yet lightest e-bike system yet, the E5000 is specifically designed to lend a helping hand to urban commutes. Whether it's cycling to work, riding the kids to school, picking up groceries or going for a spin with your friends, the E5000 offers the ideal level of support to silently boost your day-to-day activities – thanks to its integrated drivetrain and fully customisable power-assist. Elegantly built for pure comfort and relaxation.

Natural riding feeling

Smooth and silent ergonomic components and intuitive pedal-assist make biking a breeze. While its street-smart attitude helps you navigate nimbly around corners and unexpected obstacles.

Compact and lightweight

The small motor packs a punch, weighs next to nothing and blends in discreetly with the frame.


Long range

Explore the world, trusting your bike will always get you home. It goes up to 185km* on a single charge – while preserving your energy. Let the chain take the strain – and get a boost when you need it most.

* In Eco-mode


Battery life

1000 charges later, your battery will still be going strong. And will always get you there... and back.

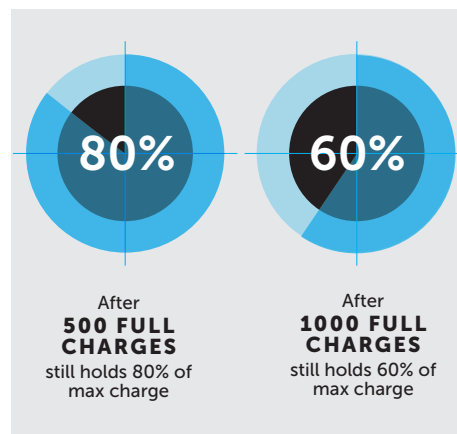

Smartphone connectivity

Wirelessly connect your smartphone to customise your ride to the max – and turn it into a cycle computer – using our Shimano E-TUBE RIDE app. Choose what you view – speed, mileage, mode and more – and how you view it. You'll have all the data at your fingertips.

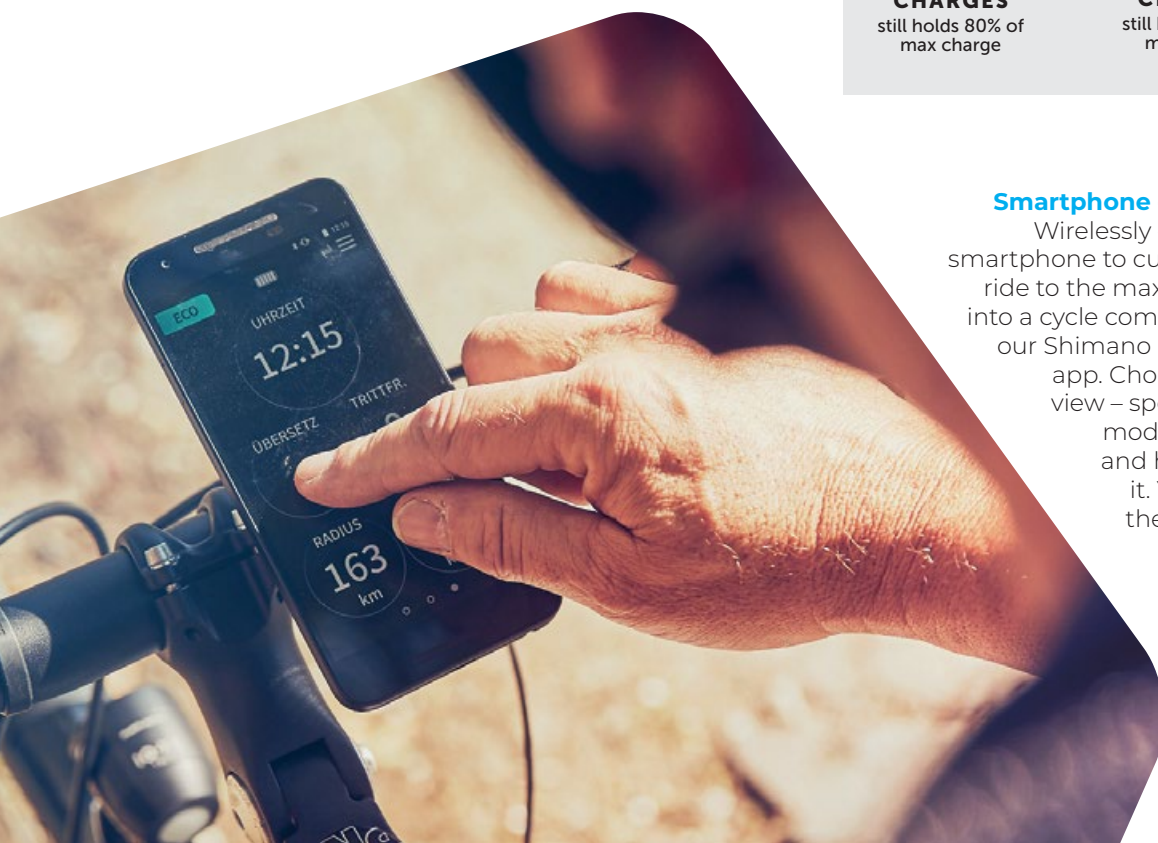

SPECIFICATIONS



Drive unit DU-E5000

- Nominal output: 250W
- Maximum torque: 40Nm
- Optimised pedalling efficiency
- Weight: 2.5kg
- Walk assist



Down tube / rear carrier battery

- Battery life: 60% capacity after 1000 charge cycles
- Long lasting battery:
BT-E6010 418Wh (downtube) /
BT-E6000 418Wh (rear carrier)




Switch unit SW-E7000

- Simple intuitive operation with clearly defined pressure points
- Small, compact and slim on the handlebars



Cycle computer SC-E7000

- Bluetooth LE / ANT private
- 3.5cm (1.39 inch) monochrome display
- Outstanding readability
- Attaches to the handlebar
- Wide range of cycle computer functions

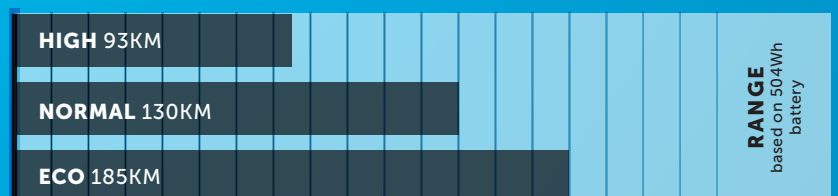

Based on Shimano original test results: flat paved road with riding speed of 23km/h and rider weight of 80kg

EON COMMUTER 20

700C COMMUTING E-BIKE 1 X 9 SPEED

E-BIKE

HYBRID



CODES

Matte Charcoal / Black

ONE SIZE FITS MOST

20046

SPECIFICATIONS

FRAME	6061 alloy commuting geometry frame, designed for Shimano STEPS power assist system	CRANKSET	Shimano STEPS E5000, Power Assist E-Bike System	CHAIN	KMC Z-99
FORK	RST Volant hydraulic lockout, 80mm Travel	BOTTOM BRACKET	Shimano STEPS, Power Assist E-Bike System	BRAKES	Shimano BR-T445 hydraulic disc brakes with 160mm rotors
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c Weinmann X-M1 double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HANDLEBAR	Alloy comfort bars, R: 40mm, W: 610mm, Sweep 43°	FRONT DERAILLEUR	N/A	TYRES	Veetire Speedster, 29 x 2.1 wire bead
GRIP	Kraton ERGO comfort grip	REAR DERAILLEUR	Shimano RD-T4000 9 speed	SADDLE	Apollo Ergotech dual density saddle
HEADSTEM	4 bolt alloy stem, ext=90mm	SHIFT LEVERS	Shimano Altus 9 speed Rapid Fire	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 9 speed cassette 11-32T	EXTRAS	Shimano STEPS battery mounted on the D/T

EON COMFORT 20

700C LOW STEP THROUGH E-BIKE 1 X 9 SPEED

E-BIKE

HYBRID

TANDEM



CODES

Gloss White / Slate

ONE SIZE FITS MOST

20047

SPECIFICATIONS

FRAME	6061 alloy low step through "Comfort zone" geometry frame with optimised step through clearance and snake stays, designed for Shimano STEPS power assist system	CRANKSET	Shimano STEPS E5000, Power Assist E-Bike System	CHAIN	KMC Z-99
FORK	RST Volant hydraulic lockout, 80mm Travel	BOTTOM BRACKET	Shimano STEPS, Power Assist E-Bike System	BRAKES	Shimano BR-T445 hydraulic disc brakes with 160mm rotors
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c Weinmann X-M1 double wall rims, 32 hole A/V, alloy quick release disc hubs with stainless spokes
HANDLEBAR	Alloy comfort bars, R: 40mm, W: 610mm, Sweep 43°	FRONT DERAILLEUR	N/A	TYRES	Veetire Easy Street, 700 x 47c wire bead
GRIP	Kraton gel dual density comfort grip	REAR DERAILLEUR	Shimano RD-T4000 9 speed	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy adjustable A-head stem	SHIFT LEVERS	Shimano Altus 9 speed Rapid Fire	SEATPOST / CLAMP	Alloy suspension post with elastomer, 27.2mm
		CASSETTE	Shimano 9 speed cassette 11-32T	EXTRAS	Shimano STEPS carry mount battery

EON 10 SERIES



Motor

This rear-drive motor, which has a rated power of 250W, a reduction ratio of 1: 5 and a maximum torque of 45 N.m, provides ideal power for vehicles. Strong and efficient, this motor greatly enhances riding comfort and is suitable for touring bikes, commuter bikes and mountain bikes.

CORE DATA

Position	Rear Motor
Construction	Gear drive
Rated Voltage (DCV)	36/43/48
n0 (Rpm)	325 ; 245
Rated Power (W)	250
nT(Rpm)	290 ; 205
Max Torque	45 N.m
Efficiency (%)	≥ 80
Color	Black
Weight (kg)	3.3
Noise Grade (dB)	< 55
Operating Temperature	-20 - 45°C

Display

The BAFANG HMI with a high-contrast LCD display delivers all important information at a glance and can also be read in direct sunlight without difficulty. The operating of the overall system is integrated into the HMI and does not require an additional handlebar controller. The additional output can be individually controlled by three support levels. The user interface is clearly legible and intuitive to use. The HMI is dirt and water resistant and complies with protection class IP 65.

Indication Information

Current Speed (km/h)	Yes
Maximum Speed (km/h)	Yes
Average Speed (km/h)	Yes
Single Duration Trip	Yes
Single Distance Trip	Yes
Total Distance	Yes
Reset S.T. Duration	No
Reset S.T. Distance	No
Capacity	Yes
Walk Boost	Yes
Backlight	Yes

Connectivity

Bluetooth	No
USB Charge	No
USB Communication	No



Battery

Core Data

Rated Voltage (DCV)	43
Nominal Capacity (Ah)	10.4

Base Parameter

Energy Content (Wh)	450
Cell	SDI-2.6 Ah
BMS	Smart BMS
Voltage Scope (V)	36 - 49.2
Internal Resistance (mΩ)	< 240
Charge mode	CC-CV (Special 5P Charger)
Continuous Charge Current (A)	2-4
Charging time	6.5h with 2A Charger
Max Continuous Discharge Current (A)	18
Consumption Rate - Work	≤ 10mA
Consumption Rate - Sleep	≤ 400uA
Consumption Rate - Deep Sleep	50 uA
Operation Temperature - Charge	0° - 45°
Operation Temperature - Discharge	-20° - 60°
Storage (At 35% SoC & -10 ~ 35°C)	6 Months
Cycle Life	500 (60% SoC (@ 20±5°C, Charge @ 0.2C and discharge @ 0.5C))

EON COMMUTER 10

700C COMMUTING E-BIKE 3 X 8 SPEED

E-BIKE

HYBRID



CODES

Matte Black / Red

ONE SIZE FITS MOST

20048

SPECIFICATIONS

FRAME	6061 alloy commuting geometry frame, designed for BAFANG power assist system	CRANKSET	Suntour XCE 48 x 38 x 28T L: =170mm	CHAIN	KMC Z-7
FORK	RST NOVA ML, mechanical lockout, 60mm travel	BOTTOM BRACKET	BAFANG, square taper with Power Assist speed sensor	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c Weinmann U-26 double wall rims, 32 hole A/V, front alloy disc hub with QR, rear Bafang power assist hub motor, stainless spokes
HANDLEBAR	Alloy riser bars, R: 15mm, W: 600mm, Sweep 5°	FRONT DERAILLEUR	Shimano FD-TY710	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
GRIP	Kraton gel dual density comfort grip	REAR DERAILLEUR	Shimano RD-TX800 8 speed	SADDLE	Apollo Ergotech dual density saddle
HEADSTEM	Alloy A-head stem	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	BAFANG carry mount battery

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.

TANDEM

EON COMFORT 10

700C LOW STEP THROUGH E-BIKE 3 X 8 SPEED

E-BIKE

HYBRID

TANDEM



CODES

Gloss Slate / Chrome

ONE SIZE FITS MOST

20049

SPECIFICATIONS

FRAME	6061 alloy low step through "Comfort zone" geometry frame with optimised step through clearance and snake stays, designed for BAFANG power assist system	CRANKSET	Suntour XCE 48 x 38 x 28T L: =170mm	CHAIN	KMC Z-7
FORK	RST NOVA ML, mechanical lockout, 60mm travel	BOTTOM BRACKET	BAFANG, square taper with Power Assist speed sensor	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
HEADSET	A-head semi integrated, semi-sealed 1-1/8"	PEDALS	Low profile high impact resin	WHEELS	700c Weinmann U-26 double wall rims, 32 hole A/V, front alloy disc hub with QR, rear Bafang power assist hub motor, stainless spokes
HANDLEBAR	Alloy riser bars, R: 15mm, W: 600mm, Sweep 5°	FRONT DERAILLEUR	Shimano FD-TY710	TYRES	Kenda Urban multi terrain, 700 x 38c wire bead
GRIP	Kraton gel dual density comfort grip	REAR DERAILLEUR	Shimano RD-TX800 8 speed	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy A-head stem	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	SEATPOST / CLAMP	Alloy 27.2mm micro adjust
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	BAFANG carry mount battery



ALTURA WS

700C WOMEN'S HYBRID - 3 X 8 SPEED

WS
women's specific



E-BIKE

HYBRID

TANDEM

CODES	XS	S	M
Gloss Dark Turquoise	22047	22048	22049

SPECIFICATIONS

FRAME	6061 butted alloy women's step through "Comfort zone" geometry frame with optimised low step through clearance	CRANKSET	Alloy crank with 48 x 38 x 28T L: 170mm	CHAIN	KMC Z-7
FORK	Apollo suspension fork with 30mm travel with preload and lockout. Alloy crown and lowers.	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	TPR two tone non-slip	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release front and nutted rear hubs. Stainless spokes
HANDLEBAR	Alloy comfort bars, R: 66mm, W: 610mm, Sweep 43°	FRONT DERAILLEUR	Shimano TX-51 top pull for 31.8mm	TYRES	Kenda 700 x 38c wire bead
GRIP	Kraton gel dual density comfort grip	REAR DERAILLEUR	Shimano RD-TX800	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy adjustable quill stem	SHIFT LEVERS	Shimano EF-500 Ez Fire 24 speed	SEATPOST / CLAMP	Alloy suspension post with new improved elastomer, 27.2mm
		CASSETTE	Shimano 8 speed cassette 12-32T	EXTRAS	Alloy kickstand

SHORELINE WS

700C WOMEN'S HYBRID - 3 X 7 SPEED

WS
women's specific

E-BIKE

HYBRID



CODES	XS	S	M
Gloss Silver	22050	22051	22052
Gloss Slate	22053	22054	22055

SPECIFICATIONS

FRAME	6061 butted alloy women's step through "Comfort zone" geometry frame with optimised low step through clearance	CRANKSET	Alloy crank with 48 x 38 x 28T L: 170mm	CHAIN	KMC Z-51
FORK	Apollo suspension fork with 30mm travel with preload, alloy crown and legs	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	Comfort non-slip with rubber insert	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release front and nutted rear hubs. Stainless spokes
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm, Sweep 43°	FRONT DERAILLEUR	Shimano TX-51 top pull for 31.8mm	TYRES	Kenda 700 x 38c wire bead
GRIP	Kraton gel dual density comfort grip	REAR DERAILLEUR	Shimano RD-TY500	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy adjustable quill stem	SHIFT LEVERS	Shimano EF-41 Ez Fire 21 speed	SEATPOST / CLAMP	Alloy suspension post with new improved elastomer, 27.2mm
		CASSETTE	Shimano HG20 7 speed cassette 12-28T	EXTRAS	Alloy kickstand

TANDEM

VILLA WS

700C WOMEN'S HYBRID - 1 X 7 SPEED



E-BIKE

HYBRID

TANDEM

CODES	XS	S	M
Gloss Purple	22056	22057	22058
Gloss Blue	22059	22060	22061

SPECIFICATIONS

FRAME	6061 butted alloy women's step through "Comfort zone" geometry frame with optimised low step through clearance	CRANKSET	Alloy crank with 44T single chainwheel with double chain guide L: 170mm	CHAIN	KMC Z-51
FORK	700c rigid hi-tensile steel	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	Alloy linear pull brakes
HEADSET	Threaded semi-sealed 1-1/8"	PEDALS	Comfort non-slip with rubber insert	WHEELS	700c Weinmann X-M1 double wall alloy rims. 32 hole A/V, alloy quick release front and nutted rear hubs. Stainless spokes
HANDLEBAR	Comfort bars, R: 66mm, W: 610mm, Sweep 43°	FRONT DERAILLEUR	N/A	TYRES	Kenda 700 x 38c wire bead
GRIP	Kraton comfort grip	REAR DERAILLEUR	Shimano Tourney 7 speed	SADDLE	Apollo Comfortech women's specific
HEADSTEM	Alloy adjustable quill stem	SHIFT LEVERS	Shimano Revoshift 7 speed.	SEATPOST / CLAMP	Alloy 27.2mm micro adjust with alloy clamp
		CASSETTE	Shimano 7 speed 14-34T freewheel	EXTRAS	Alloy kickstand

Specifications correct at time of print and subject to change without notice. See apollobikes.com for latest info. Bicycles photographed without included Australian Standards safety components.





CODES

Matte Black / Blue / Orange

22172

SPECIFICATIONS

FRAME	6061 24" disc specific aluminium gusseted MTB frame. 50mm bi-oval top and down tubes, snake stays	BOTTOM BRACKET	Cartridge bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	Suntour XCT-JR-L-DS-24, alloy crown and lowers, coil sprung, 80mm travel	PEDALS	Low profile high impact nylon	WHEELS	24" Weinmann X-M1 alloy 32 hole disc specific rims. Alloy quick release hubs with cassette rear, stainless spokes
HEADSET	Semi-sealed 1-1/8" Integrated A-head	FRONT DERAILLEUR	Shimano FD-M315	TYRES	24 x 1.95"
HANDLEBAR	Riser bar. W: 640mm	REAR DERAILLEUR	RD-M310 Altus	SADDLE	Selle Royal kids specific
GRIP	Kraton grips	SHIFT LEVERS	Shimano SL-M315	SEATPOST / CLAMP	Alloy micro adjust 27.2mm, with alloy QR clamp
HEADSTEM	A-head MTB stem with Rise: 6° Bore: 25.4mm, L: 75mm.	CASSETTE	Shimano 7 speed cassette 12-32T	EXTRAS	N/A
CRANKSET	alloy 36 x 22T L: 152mm	CHAIN	KMC Z-7		



CODES

Gloss Green / Black / Blue	22173
Matte Black / Red / Orange	22174

SPECIFICATIONS

FRAME	Alloy butted 6061 24" frame with 50mm bi-oval down tube	BOTTOM BRACKET	Nutted bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
FORK	Suspension fork with 50mm travel with alloy crown and lowers	PEDALS	High impact nylon	WHEELS	24" alloy 32 hole rims with alloy disc hubs and stainless spokes
HEADSET	Semi-sealed 1-1/8" A-head	FRONT DERAILLEUR	Shimano TZ-500	TYRES	24 x 1.95"
HANDLEBAR	Low riser bar W: 560mm	REAR DERAILLEUR	Shimano TY-300	SADDLE	Selle Royal kids specific
GRIP	Kraton grips	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST / CLAMP	Alloy 27.2mm with alloy QR clamp
HEADSTEM	A-head 2 Bolt MTB stem with Rise: 10° Bore: 25.4mm, L: 75mm.	CASSETTE	Shimano freewheel 7 speed 14-28T	EXTRAS	Kickstand
CRANKSET	Alloy 42 x 32 x 22T L: 152mm	CHAIN	KMC Z-51		



CODES

Gloss Blue / Black / Silver	22175
Matte Black / Silver / Orange	22176

SPECIFICATIONS

FRAME	Alloy butted 6061 24" frame with 50mm bi-oval down tube	BOTTOM BRACKET	Nutted bottom bracket	CHAIN	KMC Z-51
FORK	40mm travel with pressed crown and alloy lowers	PEDALS	High impact nylon	BRAKES	Alloy linear pull brakes
HEADSET	Semi-sealed 1-1/8" threaded	FRONT DERAILLEUR	N/A	WHEELS	24" alloy 32 hole rims with nutted hubs stainless spokes
HANDLEBAR	Low riser bar W: 560mm	REAR DERAILLEUR	Shimano TY-300	TYRES	24 x 1.95"
GRIP	Kraton grips	SHIFT LEVERS	Shimano Revoshift 7 speed rear	SADDLE	Selle Royal kids specific
HEADSTEM	Quill stem	CASSETTE	Shimano freewheel 7 speed 14-28T	SEATPOST / CLAMP	27.2mm with alloy QR clamp
CRANKSET	Alloy 36T with double chainguard L: 152mm			EXTRAS	Kickstand



CODES

Gloss Purple / Silver / Sky Blue	22177
Gloss White / Navy Blue / Pink	22178

SPECIFICATIONS

FRAME	Butted alloy 6061 24" step through girls aluminium frame with snake stays	CRANKSET	Alloy 42 x 32 x 22T L: 152mm	CHAIN	KMC Z-51
FORK	Suspension fork with 50mm travel with alloy crown and lowers	BOTTOM BRACKET	Nutted bottom bracket	BRAKES	JAK-8 mechanical disc brakes with 160mm rotors
HEADSET	Semi-sealed 1-1/8" A-head	PEDALS	High impact nylon	WHEELS	24" alloy 32 hole rims with alloy disc hubs and stainless spokes
HANDLEBAR	Low riser bar W: 560mm	FRONT DERAILLEUR	Shimano TZ-500	TYRES	Semi-slick 24 x 1.75" dual tread
GRIP	Kraton grips	REAR DERAILLEUR	Shimano TY-300	SADDLE	Selle Royal kids specific
HEADSTEM	A-head 2 Bolt MTB stem with Rise: 10° Bore: 25.4mm, L: 75mm.	SHIFT LEVERS	Shimano EF-41 EZ FIRE 21 speed	SEATPOST / CLAMP	Alloy 27.2mm with alloy QR clamp
		CASSETTE	Shimano freewheel 7 speed 14-28T	EXTRAS	Kickstand



CODES

Gloss Pink / Black / Blue	22179
Gloss White / Charcoal / Turquoise	22180

SPECIFICATIONS

FRAME	Butted alloy 6061 24" step through girls aluminium frame with snake stays	CRANKSET	Alloy 36T with double chainguard L: 152mm	CASSETTE	Shimano freewheel 7 speed 14-28T
FORK	40mm travel with pressed crown and alloy lowers	BOTTOM BRACKET	Nutted bottom bracket	CHAIN	KMC Z-51
HEADSET	Semi-sealed 1-1/8" threaded	PEDALS	High impact nylon	BRAKES	Alloy linear pull brakes
HANDLEBAR	Low riser bar W: 560mm	FRONT DERAILLEUR	N/A	WHEELS	24" alloy 32 hole rims with nutted hubs and stainless spokes
GRIP	Kraton grips	REAR DERAILLEUR	Shimano TY-300	TYRES	Semi-slick 24 x 1.75" dual tread
HEADSTEM	Quill stem	SHIFT LEVERS	Shimano Revoshift 7 speed rear	SADDLE	Selle Royal kids specific
				SEATPOST / CLAMP	27.2mm with alloy QR clamp
				EXTRAS	Kickstand

MOUNTAIN

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
TRAIL D 20	M	17	613	440	n/a	616	430	74.0°	105	68.5°	1170	443	24	51	551	148
	L	19.5	623	456	n/a	635	489	74.0°	115	68.5°	1189	443	24	51	551	148
TRAIL D 10	M	17	637	411	n/a	590	432	74.3°	120	67.0°	1174	450	39	51	554	148
	L	19	647	426	n/a	608	483	74.3°	130	67.0°	1193	450	39	51	554	148
	XL	20.5	656	441	n/a	625	521	74.3°	140	67.0°	1212	450	39	51	554	148
TRAIL 30	S	15	638	390	423	585	380	73.0°	110	68.5°	1113	440	45	51	550	141
	M	17	647	402	450	600	430	73.0°	120	68.5°	1132	440	45	51	550	141
	L	19.5	657	439	484	640	490	73.0°	130	68.5°	1173	440	45	51	550	141
TRAIL 20	S	15	609	399	423	585	380	73.0°	110	68.5°	1100	440	45	44	515	135
TRAIL 10	M	17	618	411	450	600	430	73.0°	120	68.5°	1121	440	45	44	515	135
	L	19.5	627	448	484	640	490	73.0°	130	68.5°	1163	440	45	44	515	135
COMP 30	S	15.5	609	404	420	590	400	73.0°	100	69.0°	1116	435	60	51	510	141
	M	17.5	618	421	443	610	440	73.0°	110	69.0°	1137	435	60	51	510	141
	L	19.5	627	438	476	630	500	73.0°	120	69.0°	1155	435	60	51	510	141
COMP 20	S	15.5	609	404	420	590	400	73.0°	100	69.0°	1116	435	60	51	510	135
COMP 10	M	17.5	618	421	443	610	440	73.0°	110	69.0°	1137	435	60	51	510	135
	L	19.5	627	438	476	630	500	73.0°	120	69.0°	1155	435	60	51	510	135
XPERT 20	S	15.5	590	395	417	575	400	73.0°	100	69.0°	1107	450	60	51	490	135
	M	17	599	412	435	595	430	73.0°	110	69.0°	1128	450	60	51	490	135
	L	19	618	414	466	615	480	72.0°	125	70.0°	1129	450	60	51	490	135
	XL	20.5	632	430	490	635	520	72.0°	140	70.0°	1149	450	60	51	490	135
	XXL	22	651	439	515	650	560	72.0°	160	70.0°	1165	450	60	51	490	135
XPERT 10	S	15.5	599	392	417	575	400	73.0°	100	69.0°	1102	450	60	51	500	135
	M	17	609	409	435	595	430	73.0°	110	69.0°	1123	450	60	51	500	135
	L	19	627	411	466	615	480	72.0°	125	70.0°	1123	450	60	51	500	135
	XL	20.5	642	427	490	635	520	72.0°	140	70.0°	1144	450	60	51	500	135
ASPIRE 30	XS	14	574	375	406	540	355	74.0°	110	69.0°	1062	440	45	42	475	135
ASPIRE 20	S	16	584	382	435	555	410	73.5°	120	69.0°	1073	440	45	42	475	135
ASPIRE 10	M	17.5	595	403	454	585	440	73.0°	130	69.5°	1092	440	45	42	475	135
	L	19	607	419	478	605	480	73.0°	140	70.0°	1108	440	45	42	475	135
	XL	21	618	435	505	630	530	72.5°	150	70.5°	1121	440	45	42	475	135
ASPIRE 30 WS	XS	14	584	373	382	540	355	74.0°	100	69.0°	1058	435	45	42	495	135
ASPIRE 20 WS	S	15.5	602	381	412	565	400	73.0°	115	70.0°	1061	435	45	42	495	135
ASPIRE 10 WS	M	17.5	616	397	437	585	440	73.0°	130	70.0°	1082	435	45	42	495	135
SUMMIT 10	XS	13	523	380	389	530	330	74.0°	100	70.0°	1035	430	35	38	435	135
	S	15	533	387	415	550	380	73.0°	110	70.0°	1051	430	35	38	435	135
SUMMIT 10 WS	XS	12	523	380	332	530	310	74.0°	100	70.0°	1035	430	35	38	435	135
	S	14	533	387	334	550	360	73.0°	110	70.0°	1051	430	35	38	435	135
STOUT 20	M	17	593	419	427	600	430	73.0°	110	69.0°	1140	455	60	51	483	197
	L	19	616	437	463	625	483	73.0°	130	70.0°	1153	455	60	51	483	197
STOUT 10	S	15	589	394	400	566	380	73.0°	100	69.0°	1103	455	60	51	483	190
	M	17	593	419	427	600	430	73.0°	110	69.0°	1140	455	60	51	483	190
	L	19	616	437	463	625	483	73.0°	130	70.0°	1153	455	60	51	483	190

ROAD

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROP-OUT SPACING
ULTRA 30	S	21.5	539	385	n/a	545	540	73.5°	140	73.0°	986	415	69	45	368	142
	M	22	553	396	n/a	560	560	73.5°	155	73.0°	1000	415	69	45	368	142
	L	23	574	399	n/a	575	580	73.0°	175	73.5°	1005	415	69	45	368	142
	XL	23.5	593	403	n/a	590	600	72.5°	195	73.5°	1014	415	69	45	368	142
GIRO 40	XS	18	541	365	410	515	460	74.5°	125	72.0°	987	420	65	50	395	135
GIRO 30	S	19	560	369	428	530	480	74.0°	145	72.0°	997	420	65	50	395	135
GIRO 20	M	19.5	576	379	444	550	500	73.5°	160	72.5°	1008	420	65	50	395	135
	L	21	602	386	472	570	530	73.0°	185	73.0°	1017	420	65	50	395	135
	XL	22	647	392	508	590	560	73.0°	230	73.5°	1037	420	65	50	395	135
SCOUT 31X	M	21.5	563	373	n/a	545	540	73.0°	150	71.0°	1029	435	67	50	395	142
SCOUT 30	L	22	586	381	n/a	560	560	73.0°	170	72.0°	1032	435	67	50	395	142
	XL	23	605	384	n/a	575	580	72.5°	190	72.0°	1041	435	67	50	395	142
SCOUT 21X	M	19.5	576	379	444	550	500	73.5°	160	72.5°	1023	435	65	50	395	135
SCOUT 10	L	21	602	386	472	570	530	73.0°	185	73.0°	1033	435	65	50	395	135
	XL	22	647	392	508	590	560	73.0°	230	73.5°	1053	435	65	50	395	135

URBAN

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROP-OUT SPACING
TRANSFER 30	S	15.5	573	380	407	550	400	73.5°	100	71.0°	1044	440	50	44	470	135
TRANSFER 20	M	18	584	402	439	575	457	73.5°	110	71.5°	1062	440	50	44	470	135
	L	20	600	416	470	600	508	73.0°	125	72.0°	1077	440	50	44	470	135
	XL	22	615	426	502	620	560	72.5°	140	72.0°	1093	440	50	44	470	135
TRANSFER 10	S	15.5	577	379	414	550	400	73.5°	100	71.0°	1043	440	50	42	474	135
	M	18	589	401	446	575	457	73.5°	110	71.5°	1062	440	50	42	474	135
	L	20	605	415	477	600	508	73.0°	125	72.0°	1077	440	50	42	474	135
	XL	22	619	425	507	620	560	72.5°	140	72.0°	1091	440	50	42	474	135
TRANSFER 10 WS	XS	588	366	395	540	400	73.5°	110	70.0°	1041	440	55	42	474	135	135
	S	604	376	417	555	430	73.5°	125	70.5°	1053	440	55	42	474	135	135
	M	620	386	440	570	460	73.5°	140	71.0°	1062	440	55	42	474	135	135

URBAN (CONT.)

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
TRACE 30	S	15.5	579	379	409	550	400	73.5°	160	71.0°	1046	440	50	45	417	135
TRACE 20	M	18	590	400	441	575	457	73.5°	170	71.5°	1066	440	50	45	417	135
	L	20	606	415	472	600	508	73.0°	185	72.0°	1077	440	50	45	417	135
	XL	22	621	424	503	620	560	72.5°	200	72.0°	1094	440	50	45	417	135
TRACE 10	S	15.5	579	379	414	550	400	73.5°	160	71.0°	1041	440	50	45	417	135
	M	18	590	400	445	575	457	73.5°	170	71.5°	1061	440	50	45	417	135
	L	20	606	415	477	600	508	73.0°	185	72.0°	1075	440	50	45	417	135
	XL	22	621	424	507	620	560	72.5°	200	72.0°	1090	440	50	45	417	135
TRACE 20 WS	XS	15.5	574	370	381	540	400	73.5°	150	71.0°	1027	440	55	45	417	135
	S	17	584	382	400	555	430	73.5°	160	71.0°	1043	440	55	45	417	135
	M	18	593	394	420	570	460	73.5°	170	71.0°	1060	440	55	45	417	135
TRACE 10 WS	XS	15.5	576	369	387	540	400	73.5°	150	71.0°	1027	440	55	40	417	135
	S	17	586	382	406	555	430	73.5°	160	71.0°	1043	440	55	40	417	135
	M	18	595	394	423	570	460	73.5°	170	71.0°	1060	440	55	40	417	135
EXCEED 20 DISC	S	17.5	551	397	406	555	450	74.0°	130	72.0°	1030	430	70	50	395	135
EXCEED 10 DISC	M	19.5	581	413	443	585	500	73.5°	160	72.5°	1050	430	70	50	395	135
	L	21	605	420	469	605	530	73.0°	185	72.5°	1065	430	70	50	395	135
	XL	22	631	432	496	625	560	73.0°	210	73.0°	1080	430	70	50	395	135
MARK III	S	17.5	535	397	406	555	450	73.5°	135	71.0°	1042	460	65	45	380	120
	M	19.5	556	420	440	585	500	73.5°	155	71.5°	1068	460	65	45	380	120
	L	21	576	429	465	605	530	73.0°	175	72.0°	1078	460	65	45	380	120
	XL	22	595	437	489	625	560	72.5°	195	72.0°	1104	460	65	45	380	120
MARK II	S	17.5	535	412	405	555	450	75.0°	135	71.0°	1032	460	65	45	380	135
	M	19.5	556	420	435	585	500	73.5°	155	71.5°	1068	460	65	45	380	135
	L	21	576	429	460	605	530	73.0°	175	72.0°	1077	460	65	45	380	135
	XL	22	595	437	483	625	560	72.5°	195	72.0°	1092	460	65	45	380	135
MARK III WS	S	16.5	589	350	300	600	420	67.0°	170	68.0°	1068	465	70	45	410	120
	M	18.5	589	390	330	640	470	67.0°	170	68.0°	1108	465	70	45	410	120
MARK II WS	S	16.5	589	350	300	600	420	67.0°	170	68.0°	1068	465	70	45	410	135
	M	18.5	589	390	300	640	470	67.0°	170	68.0°	1108	465	70	45	410	135

LIFESTYLE

	FRAME SIZE		STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
EON COMMUTER 20	M	17.5	659	409	460	610	460	73.0°	150	71.0°	1133	480	70	44	490	135
EON COMFORT 20	M	15	615	372	293	560	380	73.0°	150	71.0°	1077	475	70	40	442	135
EON COMMUTER 10	M	17.5	659	409	460	610	460	73.0°	150	71.0°	1133	480	70	44	490	135
EON COMFORT 10	M	15	615	372	293	560	380	73.0°	150	71.0°	1077	475	70	40	442	135
ALTURA WS	XS	14	624	325	303	590	360	67.0°	170	68.0°	1080	485	70	48	450	135
SHORELINE WS	S	16.5	624	335	297	600	420	67.0°	170	68.0°	1070	465	70	48	450	135
	M	19	643	347	300	620	480	67.0°	190	68.0°	1090	465	70	48	450	135
VILLA WS	XS	14	587	341	280	590	360	67.0°	170	68.0°	1080	485	70	45	408	135
	S	16.5	587	351	275	600	420	67.0°	170	68.0°	1068	485	70	45	408	135
	M	19	605	363	285	620	480	67.0°	190	68.0°	1087	485	70	45	408	135
SYNCRO 700	Front				n/a	580	496	71.5°	140	71.0°		-	70	45	375	135
	Rear				n/a	615	400	72.0°	-	71.5°	-	450	70	-		135

YOUTH

	FRAME SIZE	STACK	REACH	STAND OVER HEIGHT	EFFECTIVE TOP TUBE LENGTH	SEAT TUBE (CENTRE TO TOP)	SEAT ANGLE	HEAD TUBE LENGTH	HEAD ANGLE	WHEEL BASE	CHAIN STAY LENGTH	BB DROP	FORK RAKE	AXLE TO CROWN	REAR DROPOUT SPACING
ASPIRE 24	12.5	514	369	362	526	318	73.0°	110	70.0°	995	410	30	38	421	135
PANTHER COUGAR	12.5	496	374	359	526	318	73.0°	110	68.0°	1014	410	30	38	410	135
VERVE PARIS	12.5	496	374	313	526	318	73.0°	110	68.0°	1013	410	30	38	410	135



Proudly Distributed By



Apollo Bicycle Company Pty. Ltd.

ABN 60 001 914 469

1/333 Frankston Dandenong Rd,
Dandenong South, VIC 3175

Phone (03) 9700 9400

apollobikes.com

 @apollobikes

 /apollobicycles